DELTALOCK®

CE

Kettingsprongen

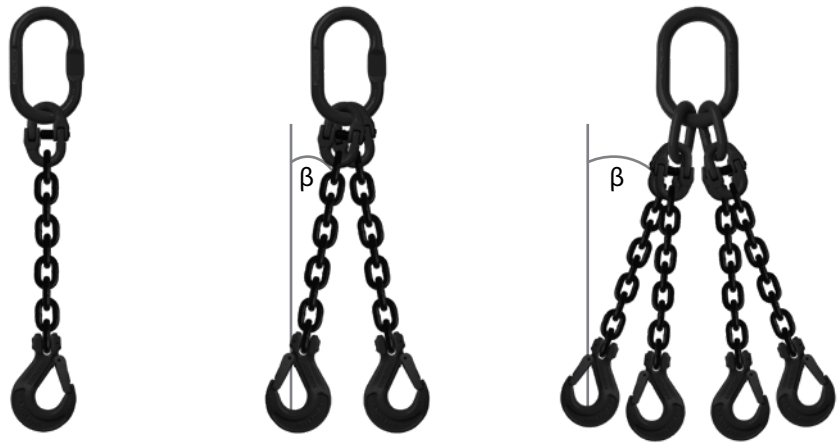

80

Kettingmaat	Capaciteit				
	1 sprong	2 sprong		3-4 sprong	
	0°	β < 45°	β = 45°-60°	β < 45°	β = 45°-60°
Ømm	ton	ton	ton	ton	ton
6	1,120	1,600	1,120	2,350	1,700
8	2,000	2,800	2,000	4,250	3,000
10	3,150	4,250	3,150	6,700	4,750
13	5,300	7,500	5,300	11,200	8,000
16	8,000	11,200	8,000	17,000	11,800
20	12,500	17,000	12,500	26,500	19,000
22	15,000	21,200	15,000	31,500	22,400
26	21,200	30,000	21,200	45,000	31,500
32	31,500	45,000	31,500	67,000	47,500

100

Kettingmaat	Capaciteit				
	1 sprong	2 sprong		3-4 sprong	
	0°	β < 45°	β = 45°-60°	β < 45°	β = 45°-60°
Ømm	ton	ton	ton	ton	ton
6	1,400	2,000	1,400	3,000	2,120
8	2,500	3,550	2,500	5,300	3,750
10	4,000	5,600	4,000	8,000	6,000
13	6,700	9,500	6,700	14,000	10,000
16	10,000	14,000	10,000	21,200	15,000
20	16,000	22,400	16,000	33,500	23,600
22	19,000	26,500	19,000	40,000	28,000
26	26,500	37,500	26,500	56,000	40,000
32	39,300	55,000	39,300	82,500	59,000

Subject to changes without notice. Illustrations for reference only. Always obey the operating instructions.
2025 © DELTALOCK® Hoisting Equipment E1411250930

Kettingsprongen Grade 80

Eigenschappen

- Volgens EN 818-4.
- Leverbaar met verschillende lengtes, met andere haken en met of zonder inkorthaken.
- Geleverd met testcertificaat en CE-conformiteitsverklaring.

Subject to changes without notice. Illustrations for reference only. Always obey the operating instructions.
2025 © DELTALOCK® Hoisting Equipment E1411250930

Kettingsprongen Grade 100

Eigenschappen

» Leverbaar met verschillende lengtes, met andere haken en met of zonder inkorthaken.
» Geleverd met testcertificaat en CE-conformiteitsverklaring.

Subject to changes without notice. Illustrations for reference only. Always obey the operating instructions.
2025 © DELTALOCK® Hoisting Equipment E1411250930