1 - CHANGING THE OPENING DIRECTION

Step 1 : Unscrew the 3 screws to remove the strike plate.




Step 2 : Reverse the strike latch.



2.1 - Unscrew the security screw.



2.2 - Rotate the strike latch.

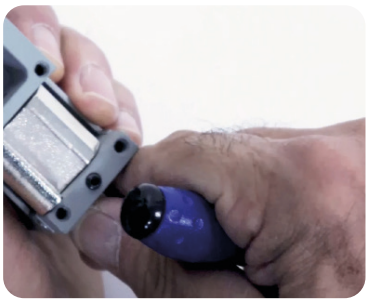


2.3 - Remove the pin to release the latch.



2.4 - Reinsert the pin and tighten the screw.


Step 3 : Flip the plate and screw it back in place.



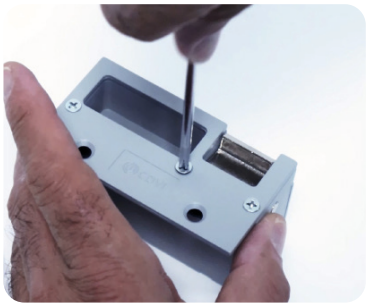


2 - ELECTRICAL CONNECTION


Cable entry points have been pre-designed.
Using pliers, break the designated area closest to the cable entry point.

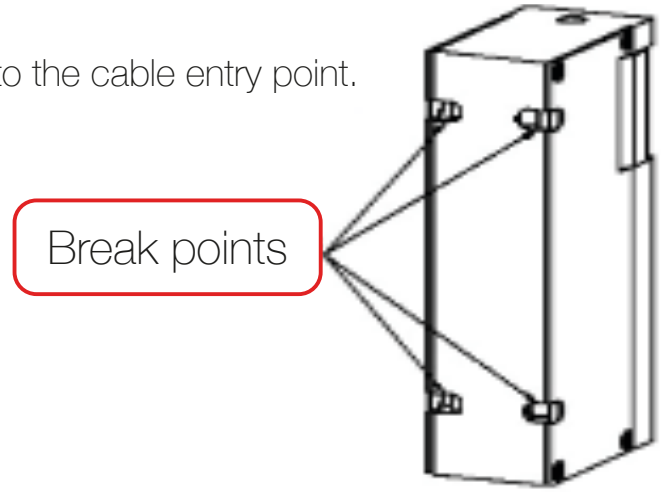

4 break points for cable routing

Route the cables to the nearest exit hole closest to the installation's connection point.

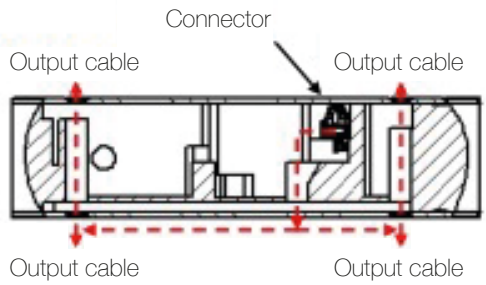

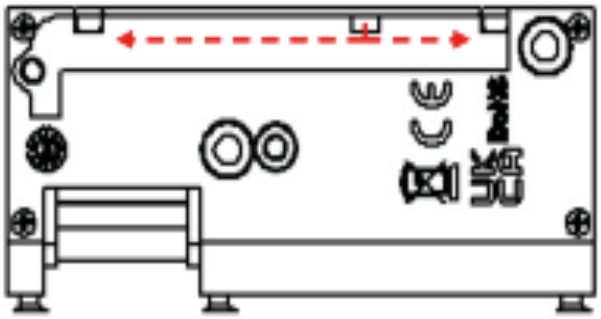

Connect the strike to a 220V / 12V AC or DC transformer.

