




a_p / DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	TDET 17-M			TDET 17-MM			TDET 17-R		TDET 17-FA
	0.4	0.8	1.6	0.4	0.8	1.6	0.8	1.6	0.8
	1.7	1.3	0.5	1.7	1.3	0.5	1.3	0.5	1.3

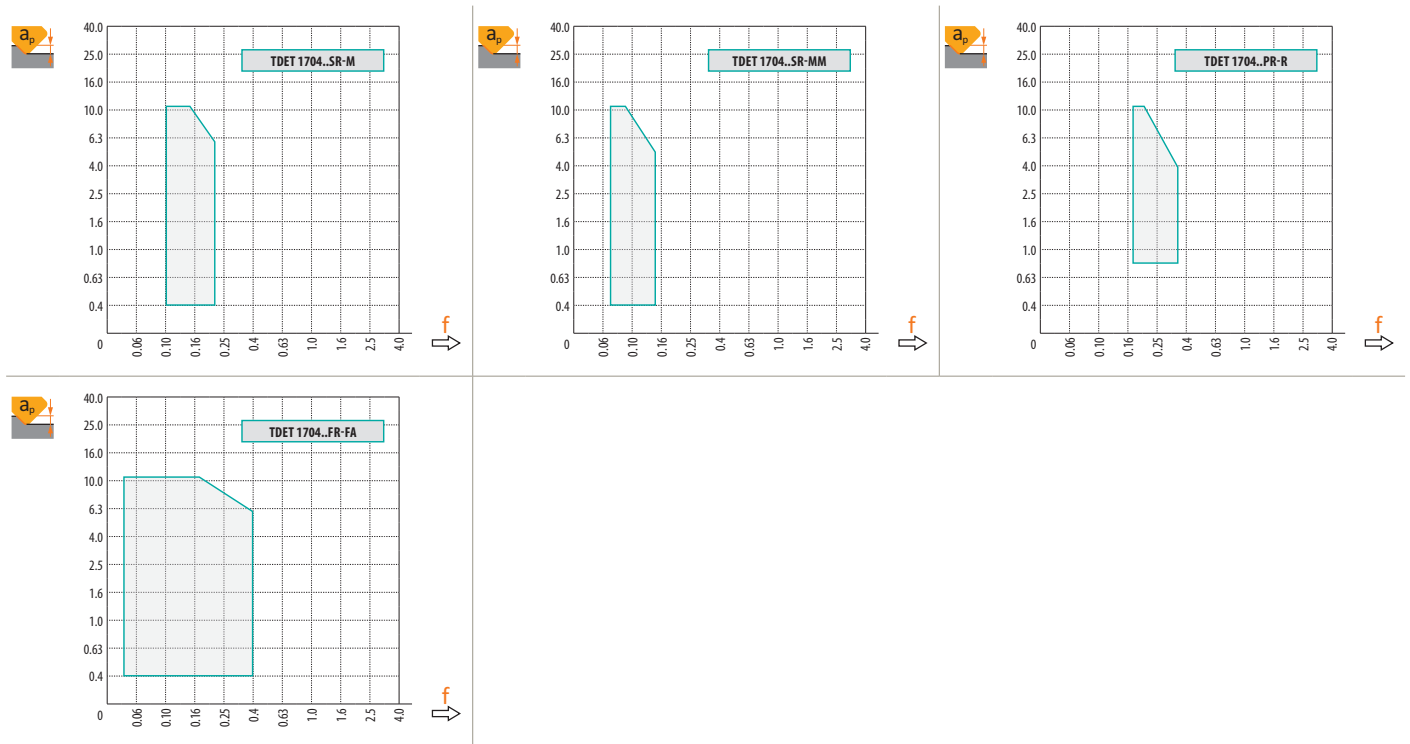

a_p	1.00	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00
	0.20	0.19	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10



DC	RPMX	APMX/I
32	2.3°	3.9/100
35	2.1°	3.5/100
40	2.0°	3.3/100
42	2.0°	3.3/100
50	1.0°	1.6/100
52	1.0°	1.6/100
63	1.0°	1.6/100
66	0.8°	1.2/100

DC	RPMX	APMX/I
80	0.8°	1.2/100
100	0.7°	1.1/100
115	0.5°	0.7/100
125	0.5°	0.7/100
140	0.4°	0.5/100
160	0.4°	0.5/100
175	0.4°	0.5/100
200	0.3°	0.4/100



DC	DMIN	DMAX	SMAX DMIN	SMAX DMAX
32	54.1	63.0	2.8	3.9
35	63.7	69.0	3.3	3.9
40	70.5	79.0	3.3	4.3
42	74.5	83.0	3.6	4.5
50	90.3	99.0	2.2	2.7
52	94.3	103.0	2.3	2.8
63	116.1	125.0	2.9	3.4
66	122.1	131.0	2.5	2.9

DC	DMIN	DMAX	SMAX DMIN	SMAX DMAX
80	150.0	159.0	3.1	3.5
100	190.0	199.0	3.5	3.8
115	220.0	229.0	2.9	3.1
125	240.0	249.0	3.2	3.4
140	270.0	279.0	2.9	3.0
160	310.0	319.0	3.3	3.5
175	340.0	349.0	3.6	3.8
200	390.0	399.0	3.1	3.3



DC	a _p	f _{max}
32	1.2	0.14
35	1.2	0.14
40	1.2	0.13
42	1.2	0.13
50	1.2	0.13
52	1.2	0.13
63	1.2	0.12
66	1.2	0.12

DC	a _p	f _{max}
80	1.2	0.12
100	1.2	0.11
115	1.2	0.11
125	1.2	0.11
140	1.2	0.10
160	1.2	0.10
175	1.2	0.10
200	1.2	0.10



DC	a _{emax}	f _{max}
32	2.5	0.10
35	2.5	0.10
40	2.5	0.10
42	2.5	0.10
50	2.5	0.10
52	2.5	0.10
63	2.5	0.11
66	2.5	0.11

DC	a _{emax}	f _{max}
80	2.5	0.11
100	2.5	0.12
115	2.5	0.12
125	2.5	0.12
140	2.5	0.13
160	2.5	0.13
175	2.5	0.13
200	2.5	0.13