Data sheet

020STAMONW

Knob selector switch, black, 3-position, Cam 0, metal






Features

Range	020 Command and Signalling SM2 Ø 22
Product	Non-illuminated knob selector switches Ø 22 - metal bezel
Type	3-position
Item code	020STAMONW
Description	Knob selector switch, black, 3-position, Cam 0, metal
Colour	Black
Weight - gr	38,000
Custom tariff no.	85365080
GTIN	8052878025267

Technical data


Approvals	CE
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Protection against impact	IK03 (IEC-EN62262)
Mechanical durability	1.000.000 Operations
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Contact blocks configuration	Max no. 4 blocks (2+2)
Knob or lever material	PC Polycarbonate
External bezel material	Chromed zinc alloy
Locking ring material	ZAMAK zinc alloy
Fixing diameter	22.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Overvoltage category	Class II (IEC-EN61140)
Warranty period	18 months

Technical drawings






CAM 0

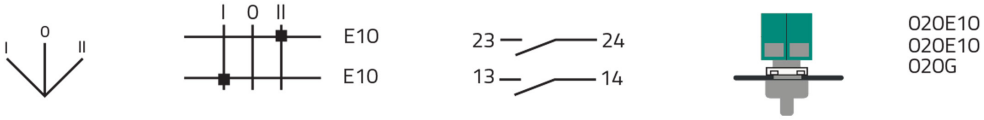

CAM 0

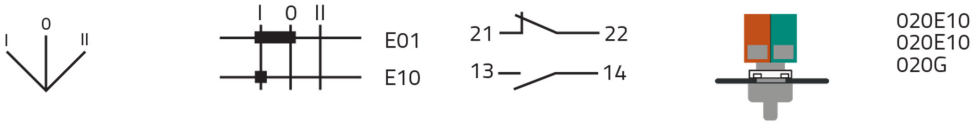

CAM 0

