

INSTRUCTION

Andho
931196.004.76



RZB
LIGHTING

~ 220 - 240 V 50/60 Hz IP 65 IK06




5 x 2,5 mm²



2,50 mm²



Umgebungstemperatur /
temperature ambiante
=> -20 °C ... + 40 °C



D 154, H 157



LED



1 x 20 W



2000



15



A++



A++



2,6 kg

CCT [K]

3000

CRI

80

RG

RG 1



18 A / 250 μs



21



34



35



57



T15



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE

DIN EN 61340-5-1



EN 12464
EN 13201



EN 12464
EN 13201



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE



100%

EN 12464




H₂O







1




2




3




4

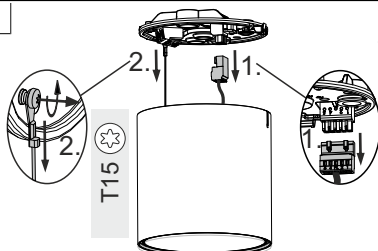


5

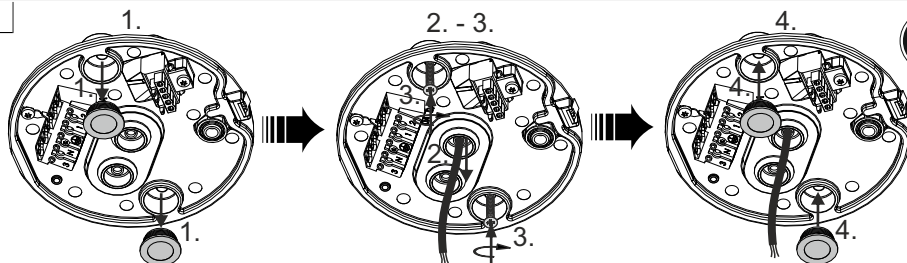


6

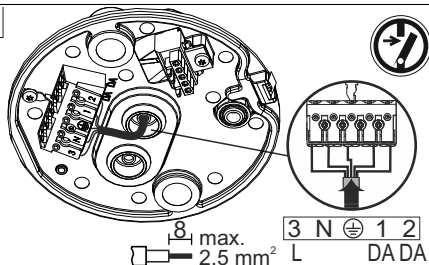

7

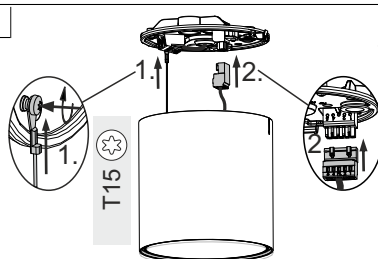


8

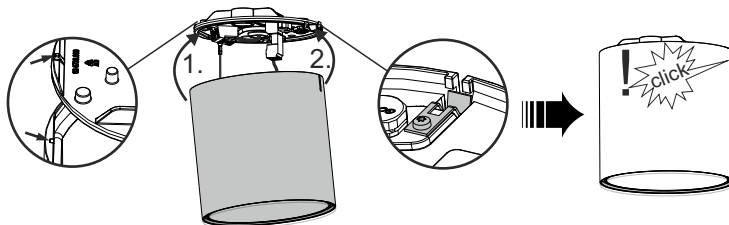



9





Bei Fragen zu unseren Symbolen, besuchen sie folgende Webseite:

If you have any questions about our signs, visit the following website:

www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf






	982163.003	Lamellenblende / lamellar shutter	L 169, D 160, H 97	1,05 kg
	982169.003	Torblende / door panel	L 340, B 340, H 31	350 g
	982166.003	Abblendschute / dimmer	D 160, H 170	150 g
	982160.006	Farbfilter blau / Color filter blue	D 160, H 58	400 g
	982160.007	Farbfilter gelb / Colour filter yellow	D 160, H 58	400 g
	982160.0077	Farbfilter grün / Colour filter green	D 160, H 58	400 g
	982160.008	Farbfilter rot / Colour filter red	D 160, H 58	400 g





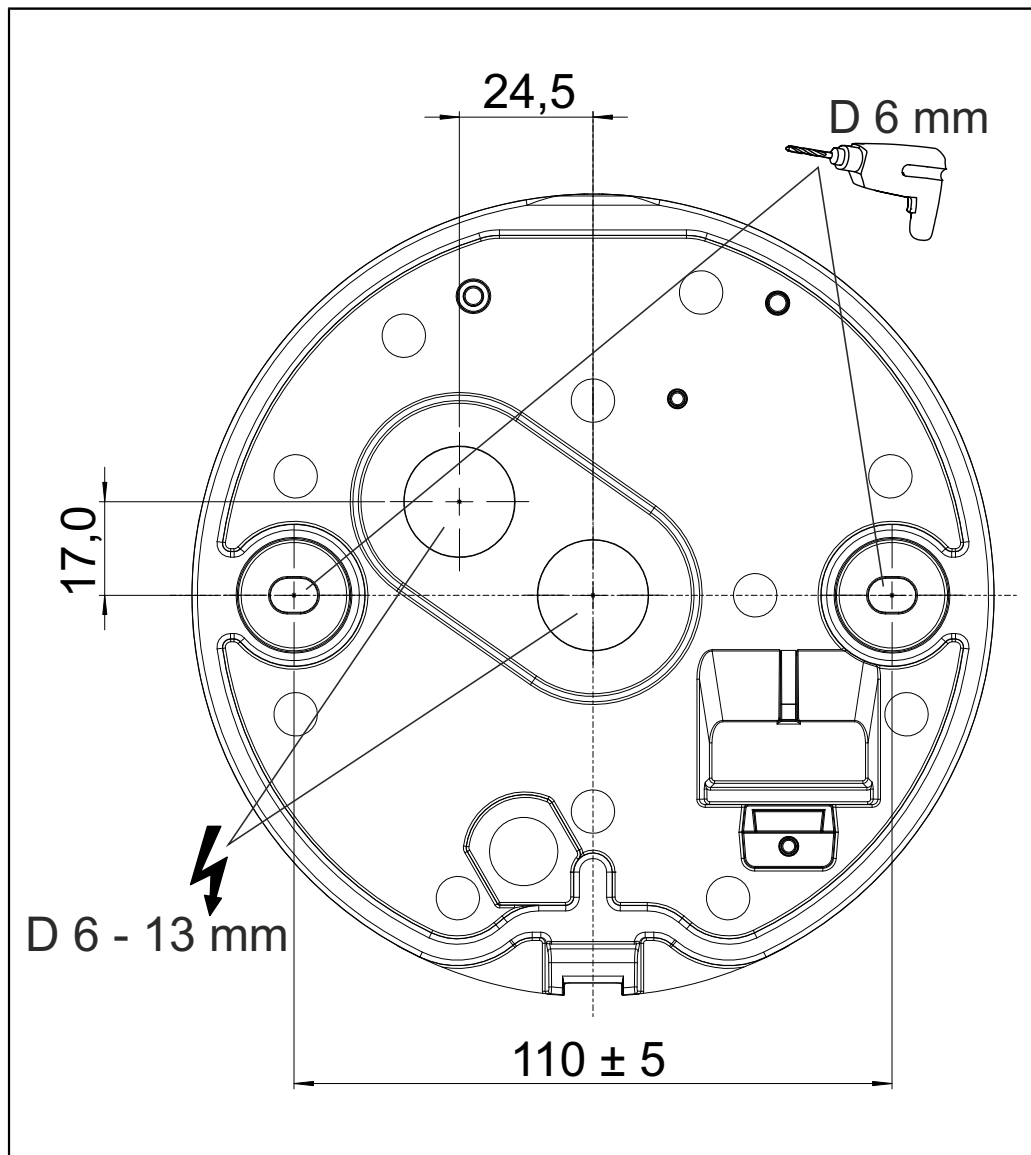

RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16
96052 Bamberg

Telefon: 0951/7909-0
Telefax: 0951/7909-198

E-mail: info@rzb-leuchten.de