

INSTRUCTION

02-2017

RZB
LIGHTING

Flat Basic LED

211400.002.76




IP 43, IP 44 IK02
mm²

220 - 240 V / 50 - 60 Hz




5 x 1,5 mm²


2,50

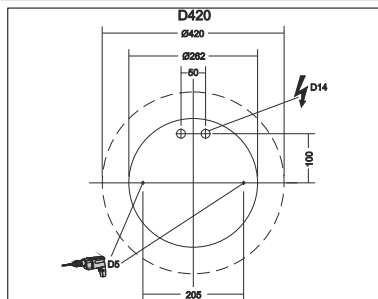

211400.002.76	D 420, H 124	LED	13,5 W	2,94 kg
Φ	EEK _{LED}	EEK	CRI	CCT
1200 lm	A+	A+	83	3000K
B10	B16	C10	C16	I max I max/2 T50
114	182	114	182	0,1 A




Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

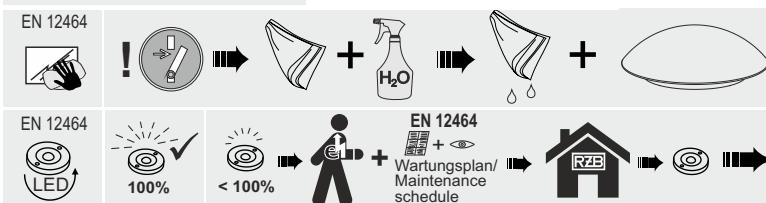


RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1

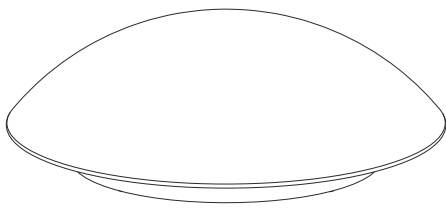


2



3

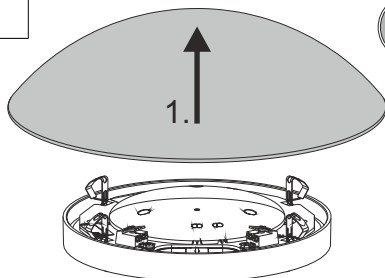


4

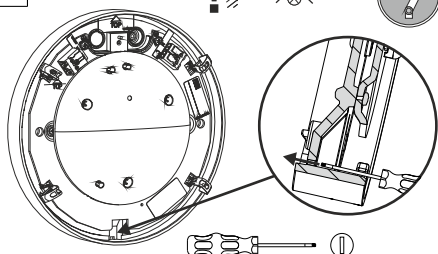


5


2x




6

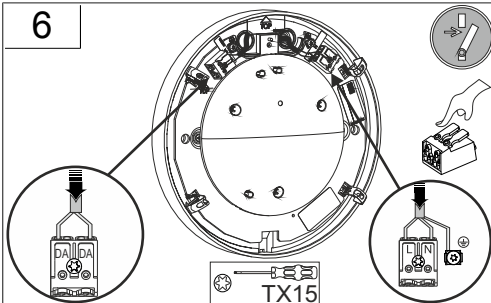

7




8

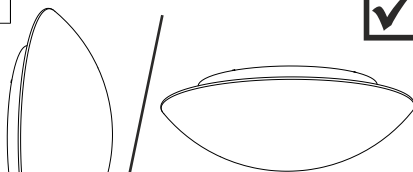



a

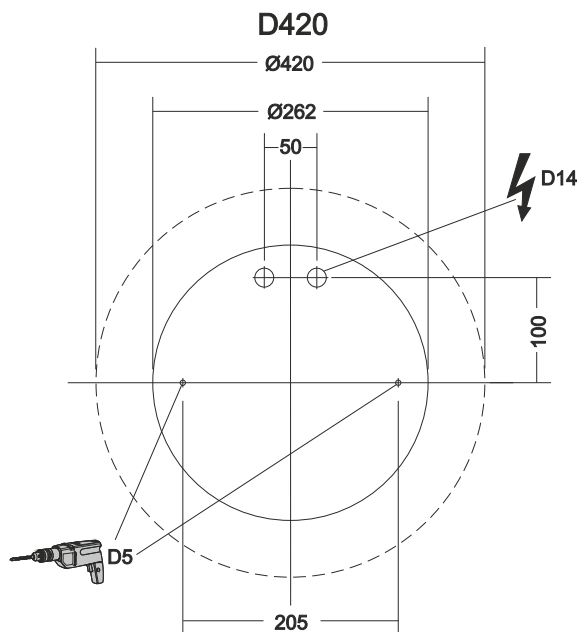

b

DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

  			
	981100.002	D 440, H 10	0,73 kg
	981100.004	D 440, H 10	0,73 kg
	981100.0042	D 440, H 10	0,73 kg
	981100.005	D 440, H 10	0,73 kg
	981100.0061	D 440, H 10	0,73 kg
	981100.0076	D 440, H 10	0,73 kg
	981100.0078	D 440, H 10	0,73 KG
	981100.007AA	D 440, H 10	0,73 KG
	981100.0082	D 440, H 10	0,73 kg
	981100.009	D 440, H 10	0,73 kg

  			
	05-211011.002	Ersatzglas D 420, H 114	2 kg