

INSTRUCTION

21-2017




RZB
LIGHTING

Levido

901594.002



~ 220 - 240 V 50/60 Hz

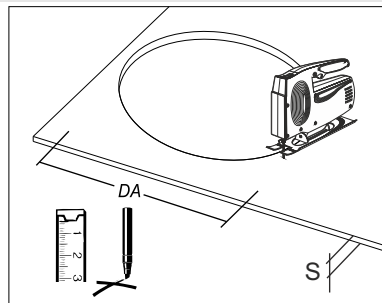

	[mm]	[mm]			
901594.002	D 91, H 2	DA 78, HE 120, S 1-20 mm	280 g		
	P	P	CRI	CCT	Φ
LED	6 W	8 W	80	3000K	550 lm
I max			EEK	EEK	
3,33 A	222	355	A+	A+	



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464




EN 12464
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1

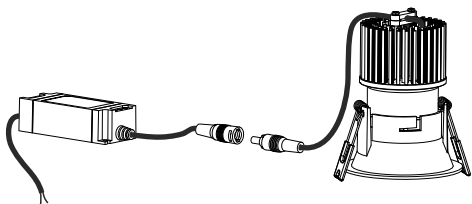


2

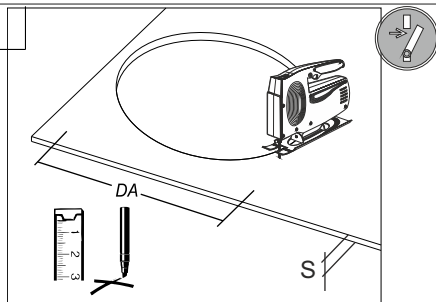


3

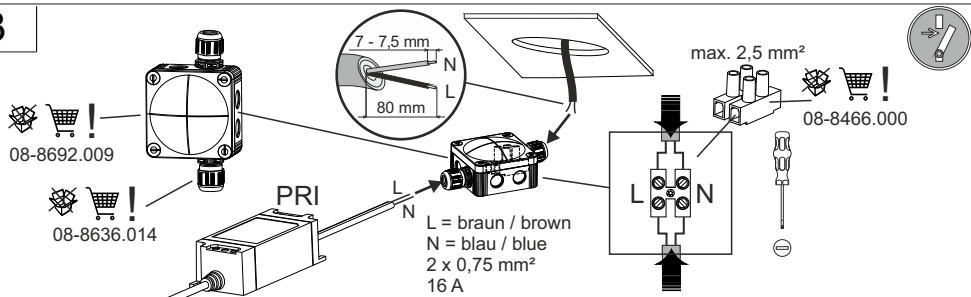


4

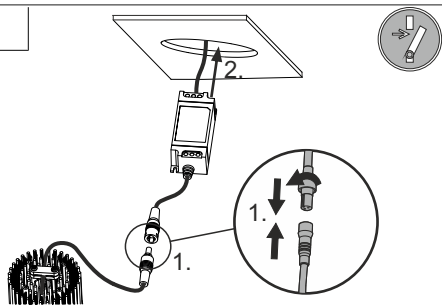


5



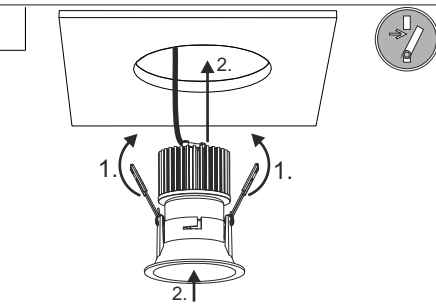


6



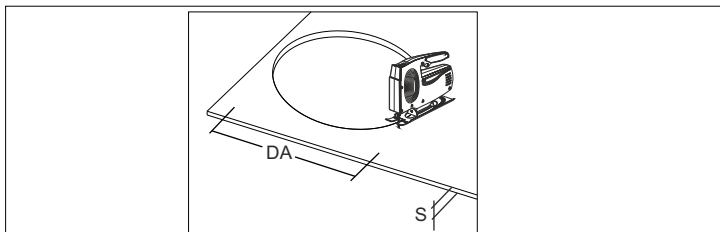

SERIE	D	H	DA	HE	L1	B1	HI	S
Levido 2 round LED	91	2	78	120	≥200	≥200	≥120	1 - 20
Levido 2 round LED swing	91	2	78	90	≥200	≥200	≥90	1 - 20

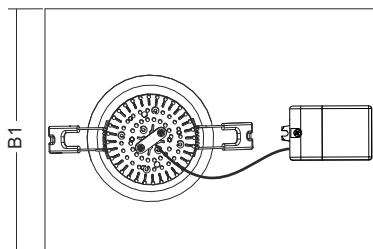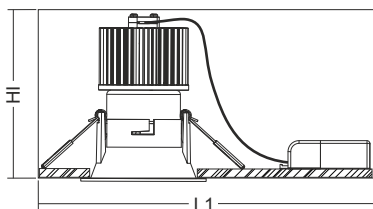

Leuchte ist nicht geeignet zur Abdeckung
mit Isoliermaterial!
Luminaire is not suitable for covering
with insulating material!

