

INSTRUCTION

45-2018

RZB
LIGHTING

Flat Polymero

311947.002.2





IP 40 IK10



~ 220 - 240 V 50/60 Hz



3 x 1,5 mm²

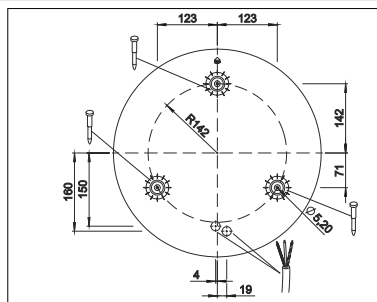

311947.002.2

D 460, H 120

2,67 kg



CCT

CRI

LED

1 x 21 W

21 W

2000 lm

3000 K

83



A+

A+

0,22 A / 200 µs

84

135

84

135



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464

EN 13201









EN 12464 / EN 13201

Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

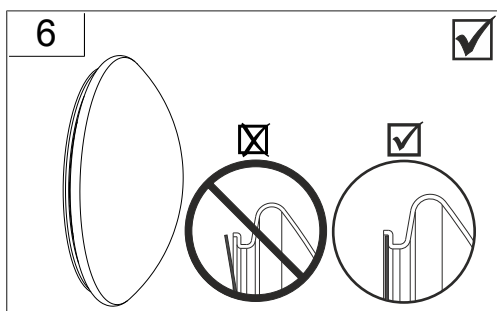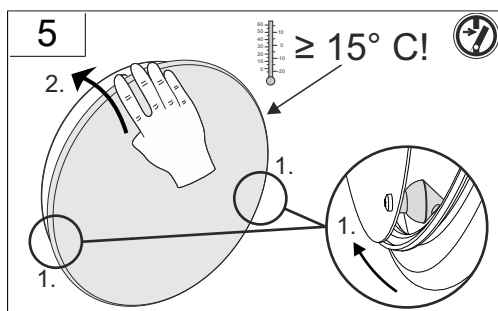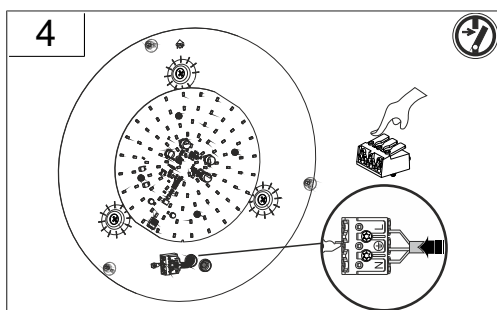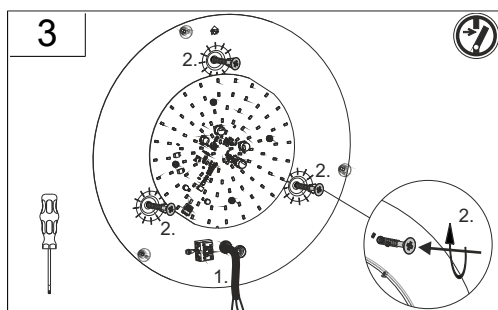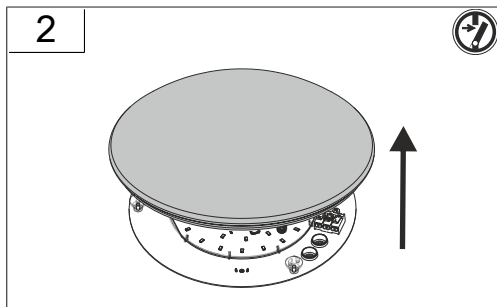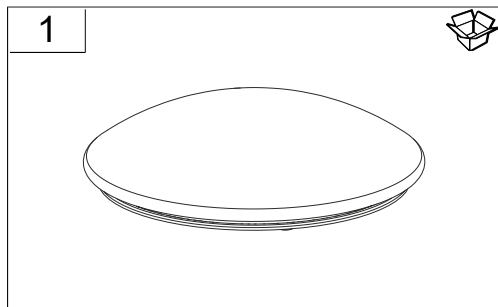



a

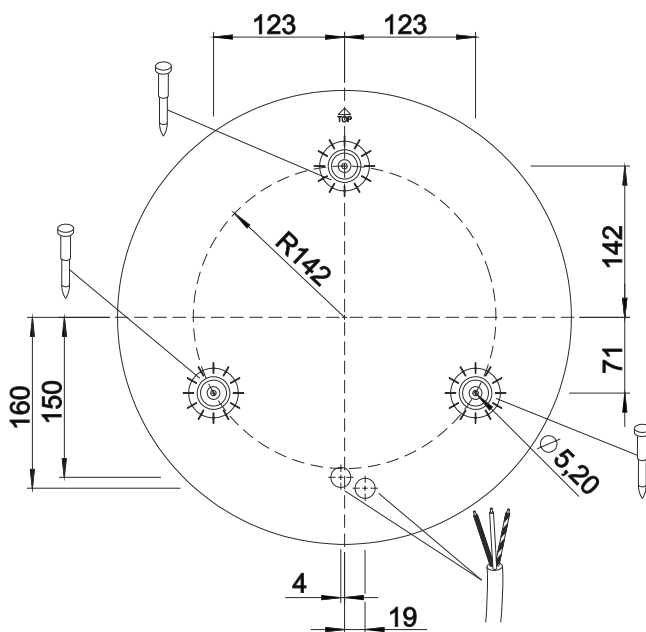

b

DIN 4844



Vor Installation, Wartung oder Reparatur freischalten/
power off before installation, maintenance or repair



	08-311165.022	D 460, H 113	0,65 kg
--	---------------	--------------	------------