

INSTRUCTION

45-2016

RZB
LIGHTING

Sidelite Round

311998.000.1.76



IP 40 IK03





230 V 50 Hz



5 x 1,5 mm²



2,50 mm²

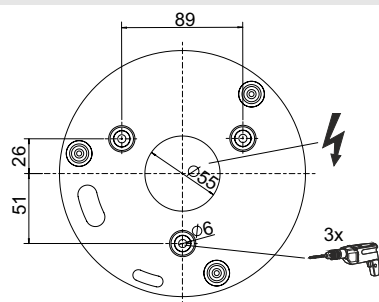

P.

P.



311998.000.1.76

D 348, H 15

LED

19 W

17 W

3,09 kg

Φ

EEK_{LED}

EEK

CRI

CCT


1950 lm

A++

A++

80

4000K



12

20

30 A




Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464











EN 12464



EN 12464
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

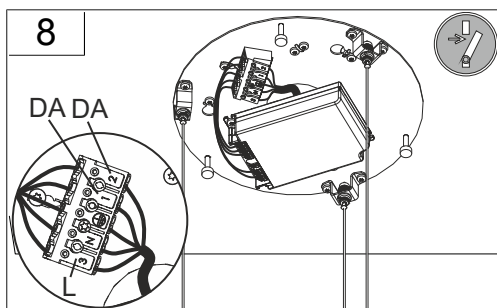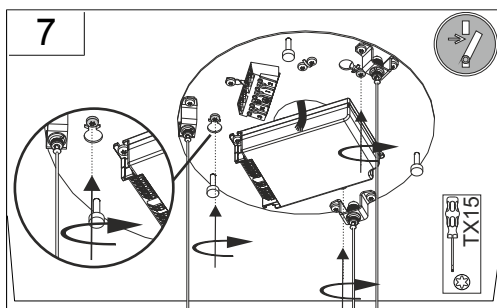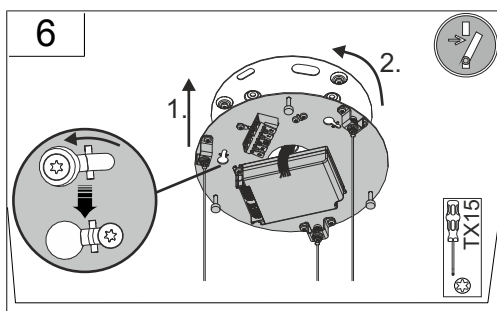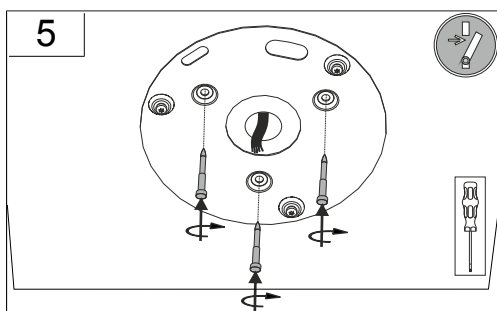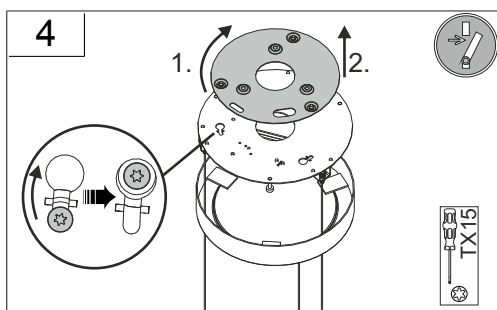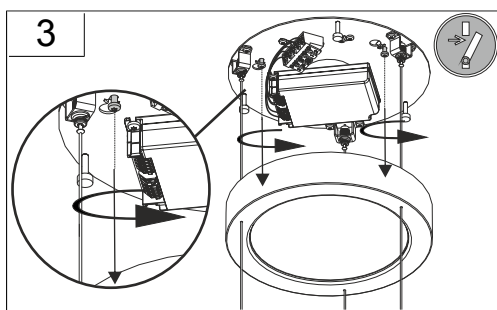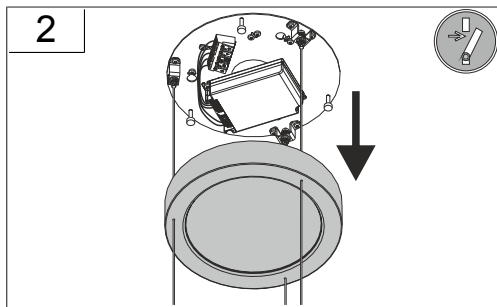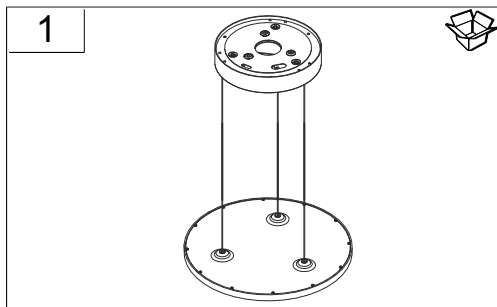




9

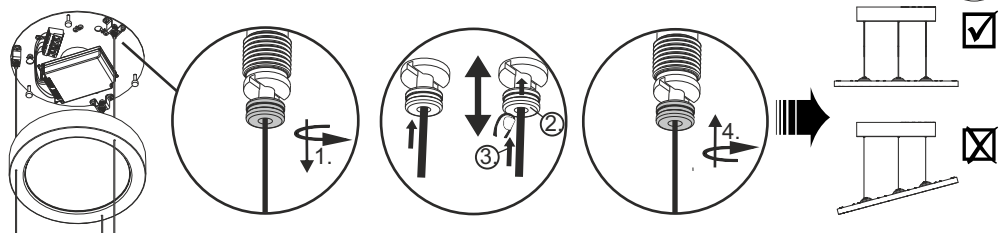


10


schräge Decke/ slanted ceiling

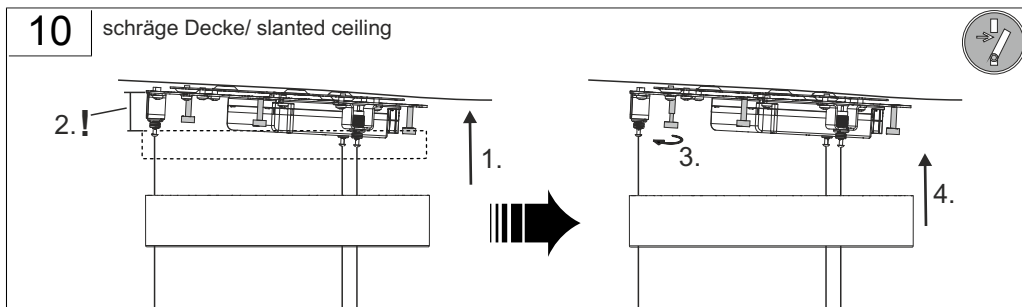

11

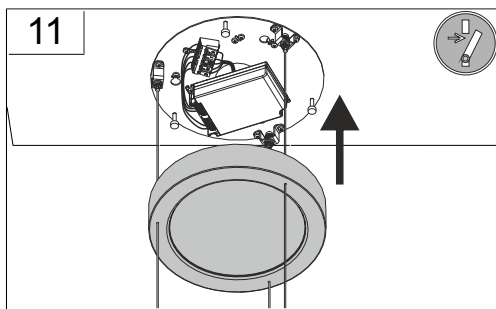

12

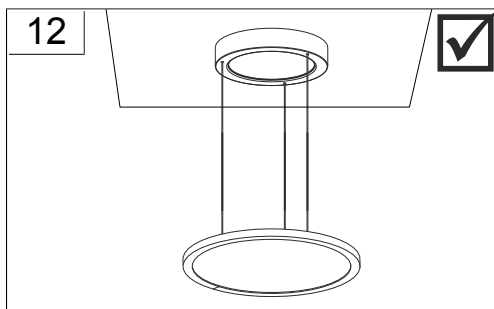

Instruction:



45-2016

