

INSTRUCTION




47-2016

RZB
LIGHTING

Flat Polymero

311943.002.1.76

IP 40 IK03
 220 - 240 V / 50/60 Hz
 LED
 5 x 1,5 mm²
 2,50 mm²

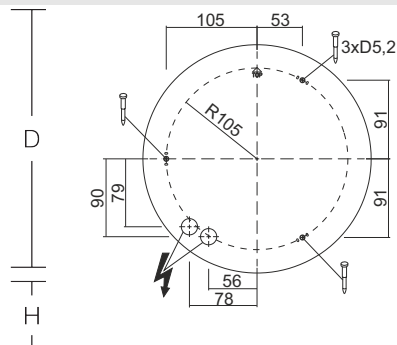

311943.002.1.76	D 300, H 100	LED	13,5 W	13,5 W	1,07 kg
Φ	EEK _{LED}	EEK	CRI	CCT	
1150 lm	A+	A+	83	3000K	
B10	B16	C10	C16		
114	182	114	182	0,15 A	



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464










EN 12464




EN 12464
Wartungsplan/
Maintenance
schedule



RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

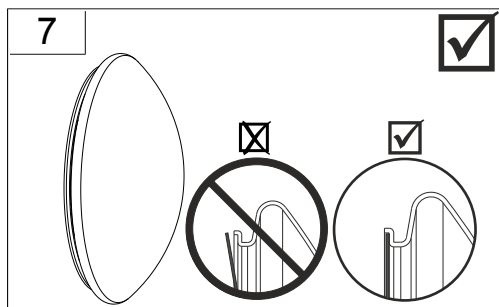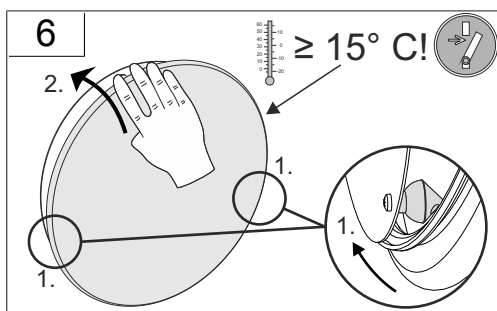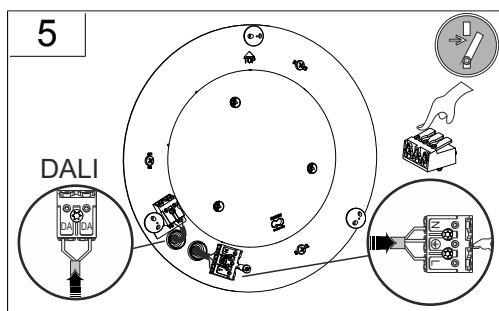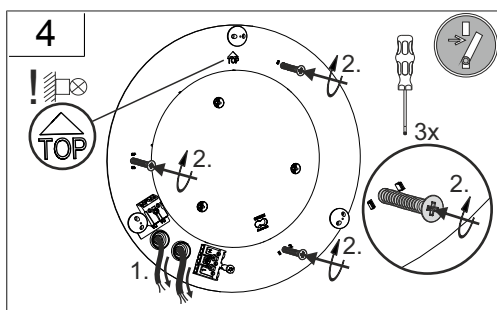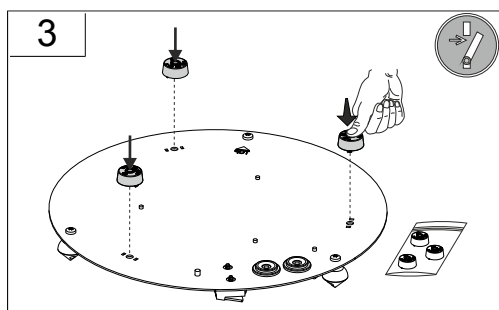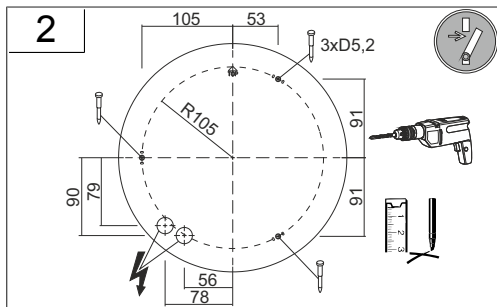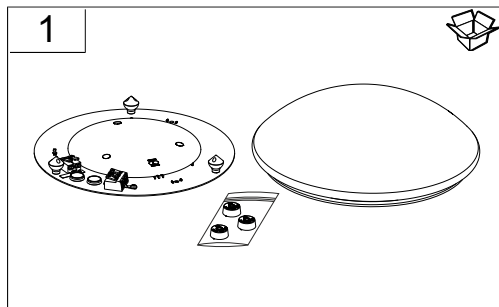

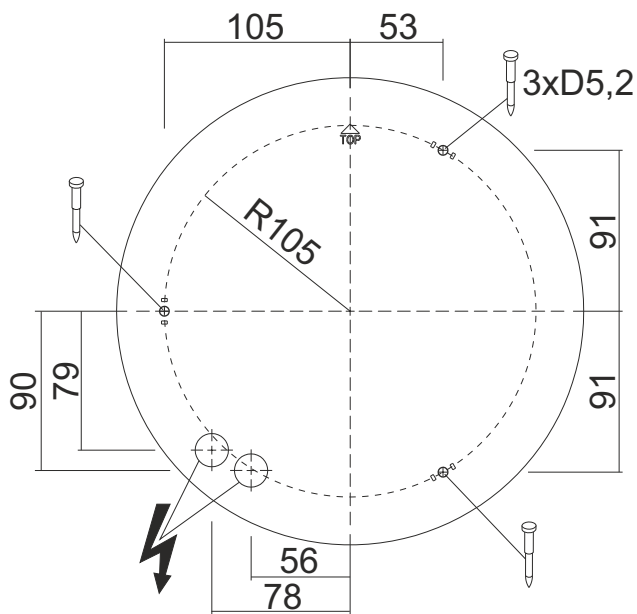

DIN 4844



Vor Installation, Wartung oder Reparatur freischalten/
power off before installation, maintenance or repair



08-311623.002 D 300, H 90

200 g