

INSTRUCTION

49-2016

RZB
LIGHTING

Flat Polymero

311946.002.4.76



IP 40 IK10





220 - 240 V / 50 - 60 Hz



5 x 1,5 mm²



2,50 mm²

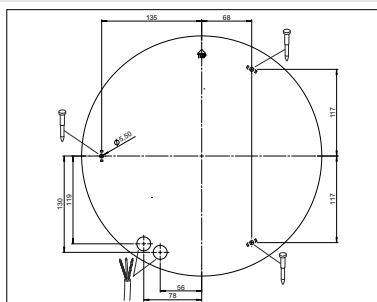

311946.002.4.76

D 360, H 100

LED

21 W

1,38 kg



EEK_{LED}

EEK

CRI

CCT


2000 lm

A+

A+

83

4000K




77

124

77

124

0,1 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464










EN 12464



EN 12464
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

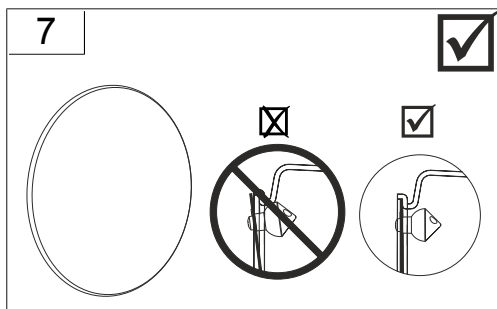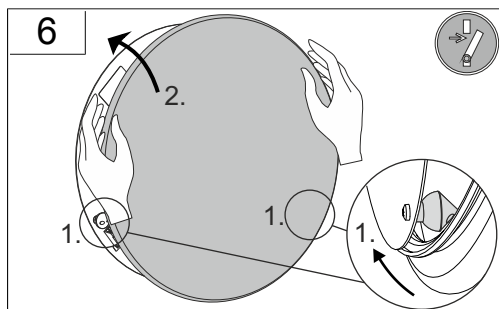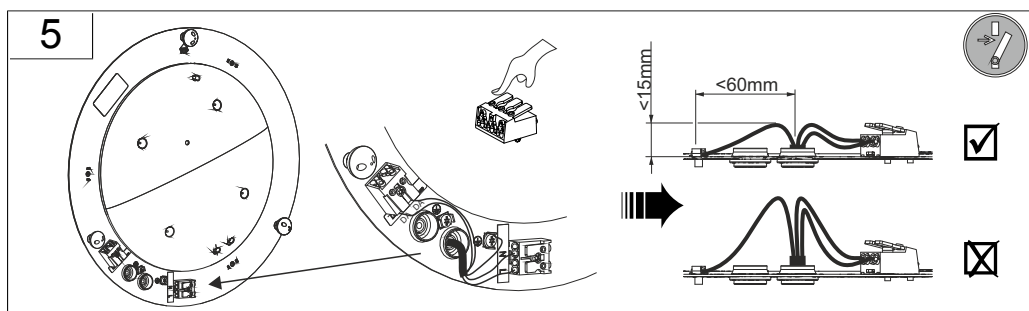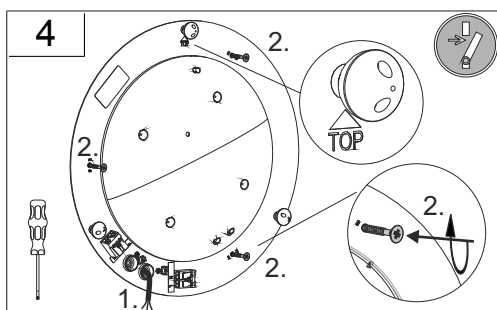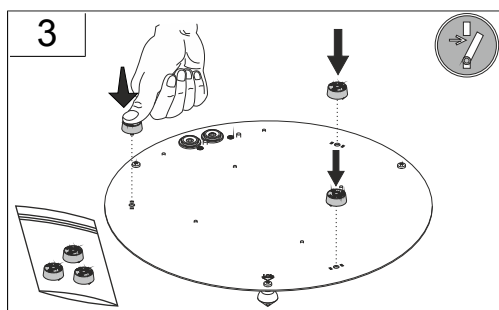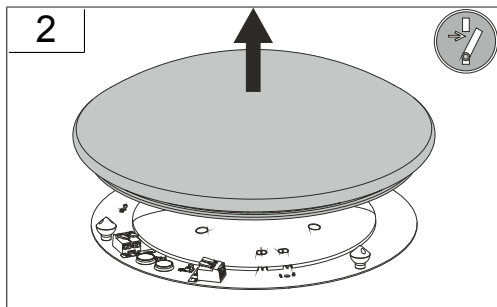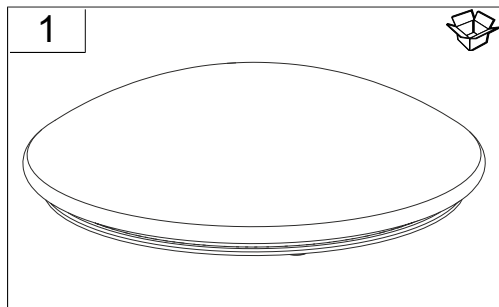



a

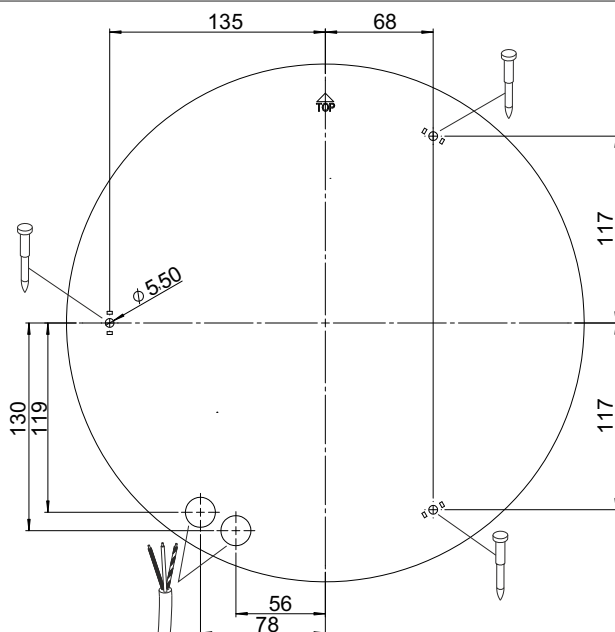

b

DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

 +  			
	981804.002	D 380, H 19	351 g
	981804.004	D 380, H 19	351 g
	981804.0042	D 380, H 19	340 g

  			
	08-311161.022	Ersatzdiffusor PC D 360	200 g