

# INSTRUCTION

Lightstream LED  
721734.1131.1.76



**RZB**  
LIGHTING

≈ 220 - 240 V 0/50/60 Hz IP 65 IK08





5 x 2,5 mm<sup>2</sup>



2,50 mm<sup>2</sup>



Umgebungstemperatur / temperature  
ambiante  
=> -40 °C ... + 35 °C



721734.1131.1.76

L 509, B 374, H 174

11 kg



LED

2 x 56 W

112 W

13100 lm

**CCT**

**CRI**

**EEK**

**EEK**

4000 K

80

A++


A++



65 A / 485 µs

3

6



4 mm

6 mm

SW 24



DIN EN 61340-5-1




EN 12464  
EN 13201





EN 12464  
EN 13201



<100%



EN 12464




2019-08-19

www.rzb.de


1




1

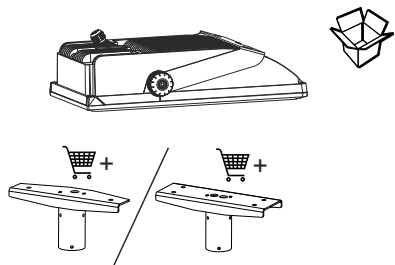


2




3

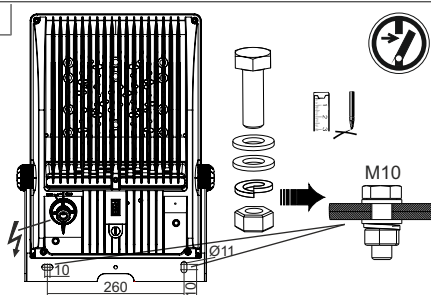


4




open close 1. open close








5

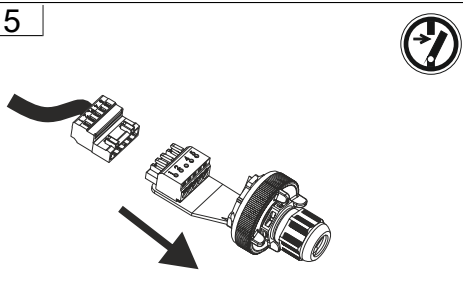


6

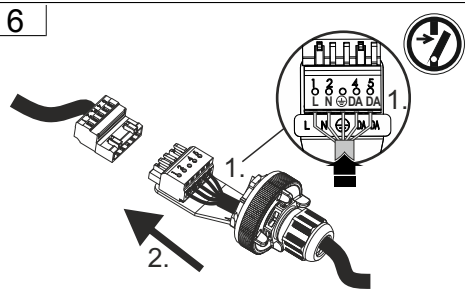

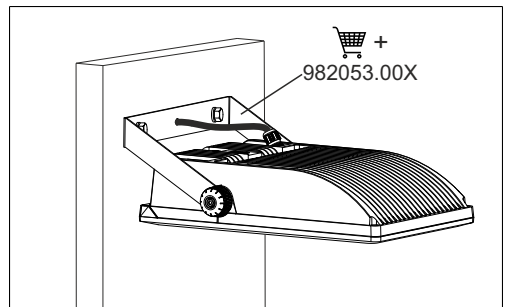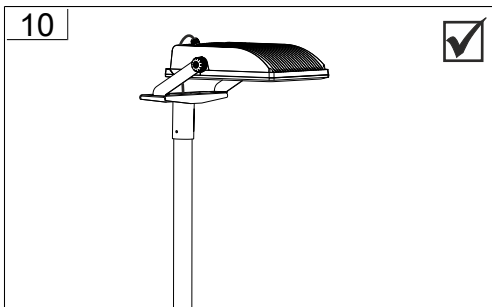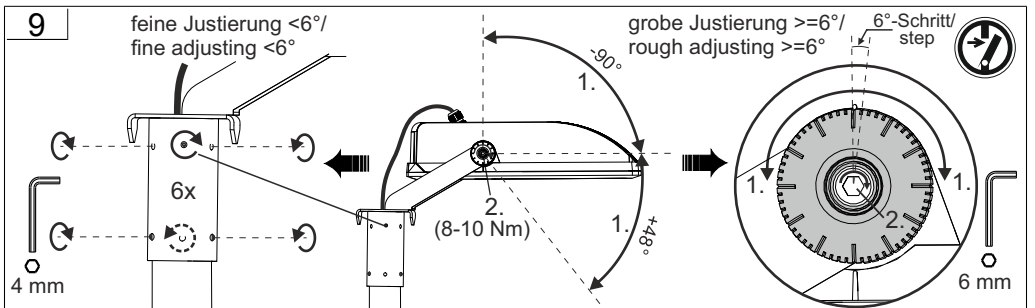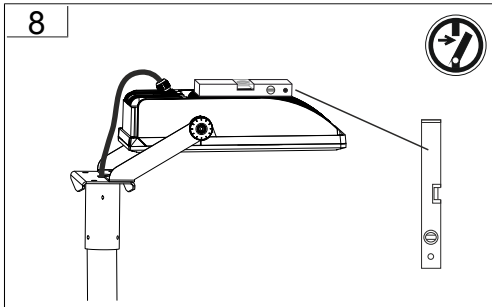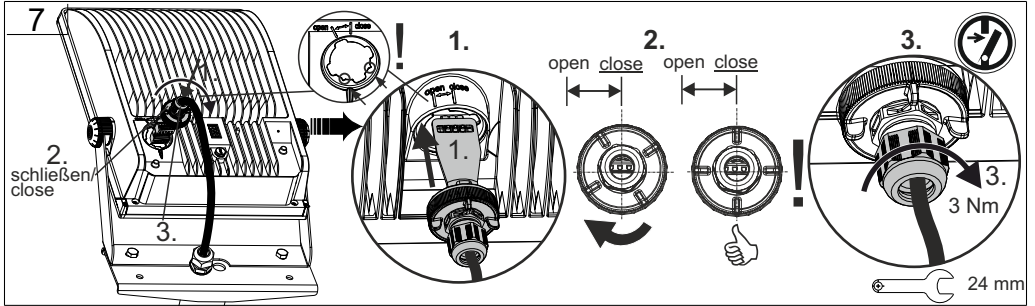




Hinweis zum Einsatz von Leuchten  
mit  -Kennzeichnung nach EN 60598-2-24

- IP 4x  Umgebung ohne Staubablagerung
- IP 5x  Umgebung mit nicht elektrisch leitender Staubablagerung
- IP 6x  Umgebung mit elektrisch leitender Staubablagerung  
Maximale Umgebungstemperatur  
beim Einsatz der Leuchte in solcher  
Umgebung beträgt nur 25° C!

Reference for application of lumiaires  
with  - marking according to EN 60598-2-24



- IP 4x  Environment without dust deposit
- IP 5x  Environment with non-electrically conductive dust deposit
- IP 6x  Environment with electrically conductive dust deposit  
Maximum ambient temperature  
when using the luminaire in such  
an environment is only 25° C!



## Indoor

&

## Outdoor




Bei Fragen zu unseren Symbolen, besuchen sie folgende Webseite:  
If you have any questions about our signs, visit the following website:


[www.rzb.de/fileadmin/assets/downloads/PDF/RZB\\_Symbolklaerung.pdf](http://www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf)





|                                                                                     |             |                      |         |
|-------------------------------------------------------------------------------------|-------------|----------------------|---------|
|     | 982053.0031 | L 346, B 152, H 210, | 0,84 kg |
|    | 982003.000  | L 346, B 112, H 154, | 3,6 kg  |
|    | 982003.0031 | L 346, B 112, H 154, | 3,6 kg  |
|    | 982004.000  | L 346, B 136, H 204, | 4,7 kg  |
|    | 982004.0031 | L 346, B 136, H 204, | 4,7 kg  |
|    | 982005.000  | L 346, B 136, H 204, | 5,1 kg  |
|    | 982005.0031 | L 346, B 136, H 204, | 5,1 kg  |
|   | 982002.000  | L 346, B 97, H 154,  | 2,9 kg  |
|  | 982002.0031 | L 346, B 97, H 154,  | 2,9 kg  |
|  | 982045.000  | L 346, B 97, H 154,  | 2,6 kg  |
|  | 982045.0031 | L 346, B 97, H 154,  | 2,6 kg  |
|  | 982046.000  | L 346, B 110, H 204, | 3,8 kg  |




|                                                                                    |             |                      |        |
|------------------------------------------------------------------------------------|-------------|----------------------|--------|
|   | 982046.0031 | L 346, B 110, H 204, | 3,8 kg |
|   | 982059.000  | L 346, B 112, H 154, | 3,3 kg |
|   | 982059.0031 | L 346, B 112, H 154, | 3,3 kg |
|    | 982401.0031 | L 525, B 381, H 87,  | 4,5 kg |
|    | 982475.0031 | L 622, B 284, H 55,  | 4,5 kg |
|    | 982525.0031 | L 460, B 410, H 55,  | 5,8 kg |
|    | 982478.0031 | L 346, B 235, H 90,  | 2,5 kg |
|  | 982638.003  | L 78, B 53, H 28,    | 80 g   |



|                                                                                     |             |                     |         |
|-------------------------------------------------------------------------------------|-------------|---------------------|---------|
|  | 981984.0031 | L 465, B 325, H 32, | 1,79 kg |
|-------------------------------------------------------------------------------------|-------------|---------------------|---------|



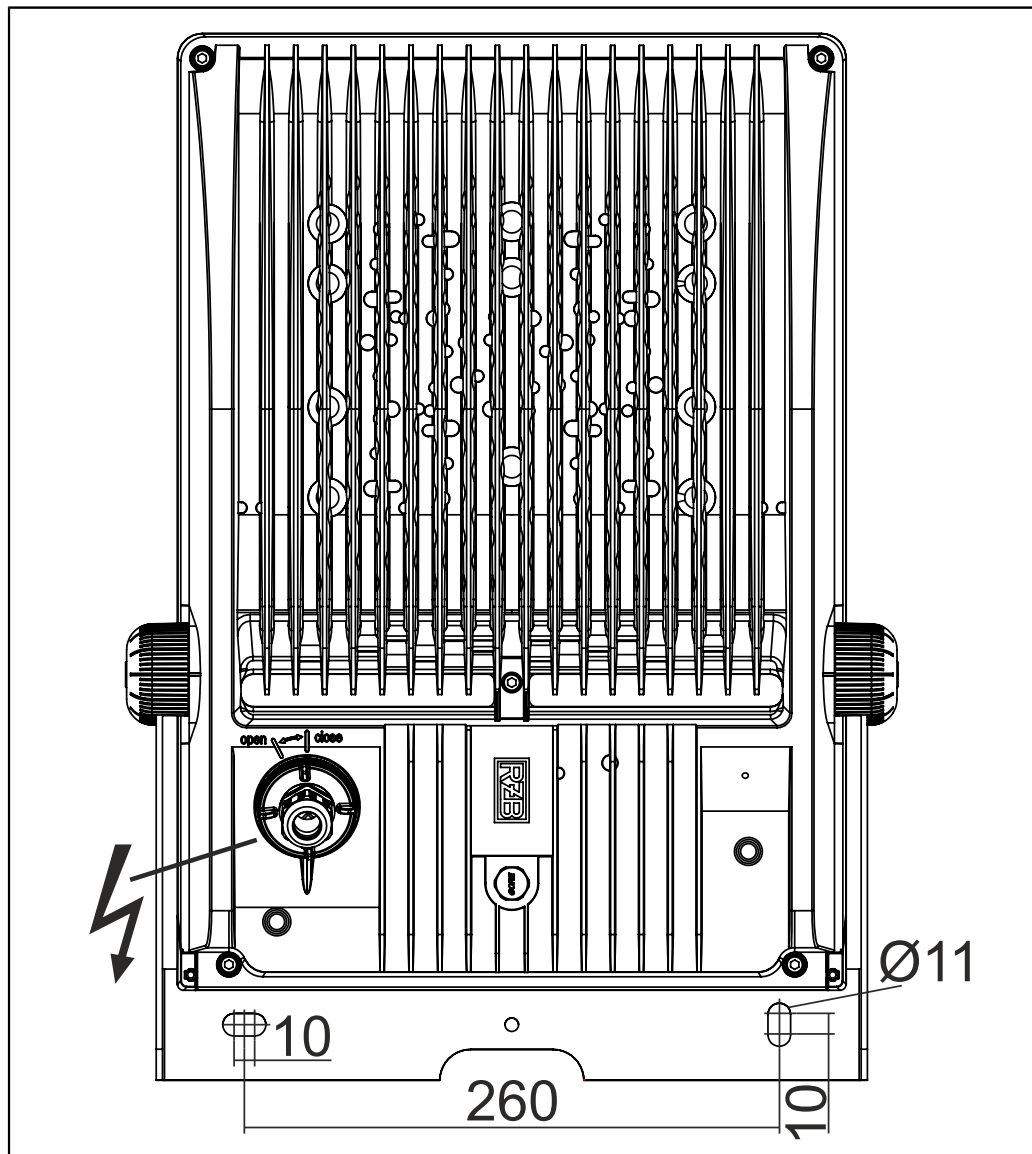

RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16  
96052 Bamberg

Telefon: 0951/7909-0  
Telefax: 0951/7909-198

E-mail: [info@rzb-leuchten.de](mailto:info@rzb-leuchten.de)