

INSTRUCTION

28-2018

RZB
LIGHTING

Flat Polymero

311943.002.2





IP 40 IK10



~ 220 - 240 V 50/60 Hz



3 x 1,5 mm²



311943.002.2

D 300, H 100

1,05 kg



CCT

CRI

LED

1 x 13,5 W

13,5 W

1150 lm

3000 K

83



A+

A+

0,15 A / 300 µs

114

182

114

182



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464

EN 13201










EN 12464 / EN 13201

Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

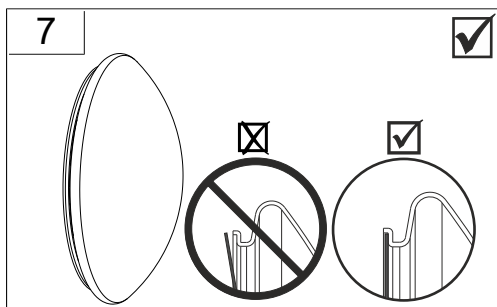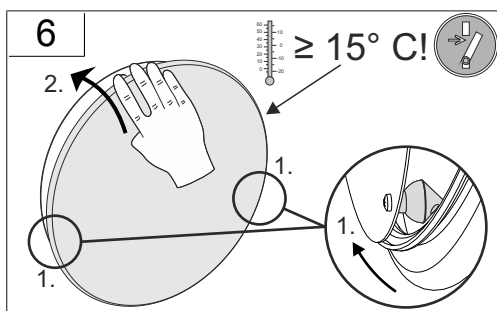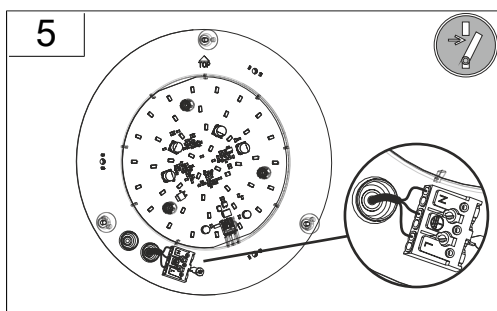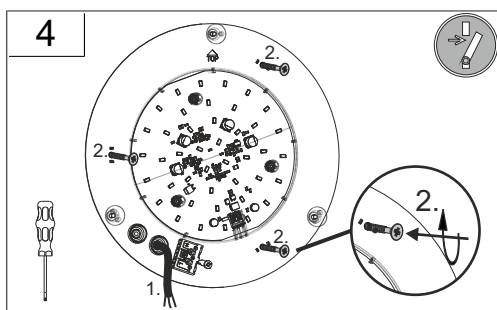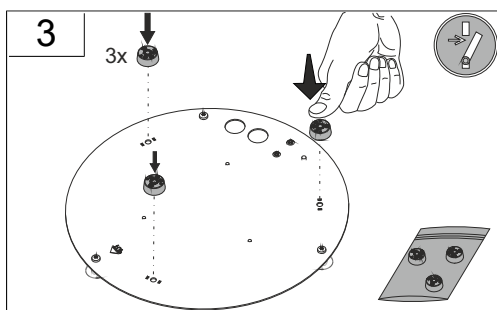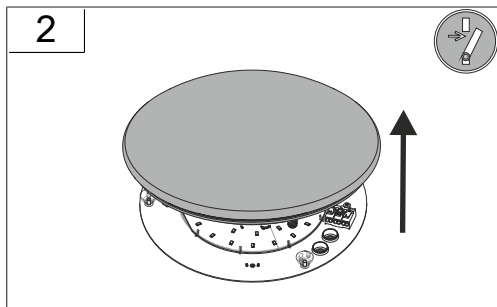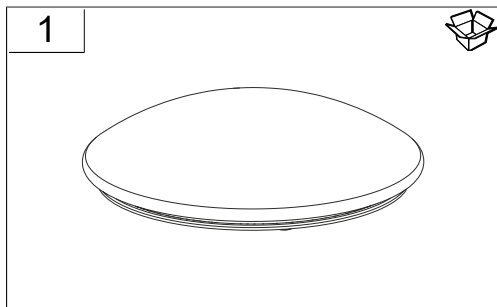



a

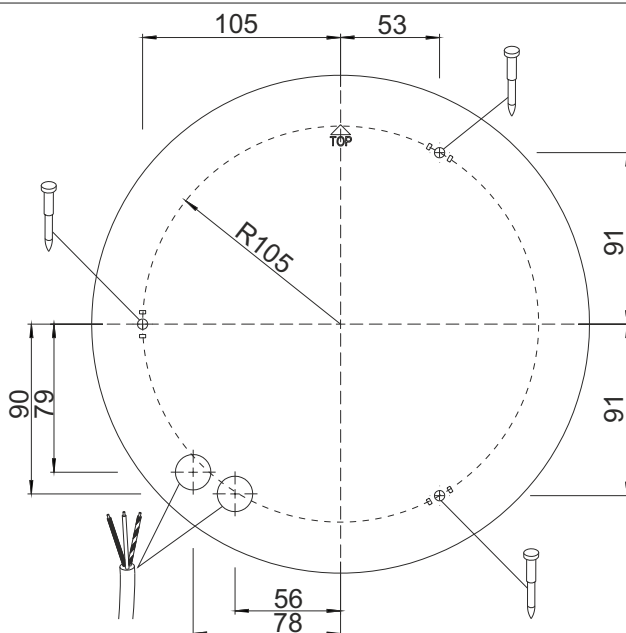

b

DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair



	08-311623.012	D 300, H 90	200 g
--	---------------	-------------	-------