IS 36 SK STK 1000 (766 100)

- For use as switching, operating and earthing stick
- Handle closed with plastic plug-in coupling for extending the handle



Figure without obligation

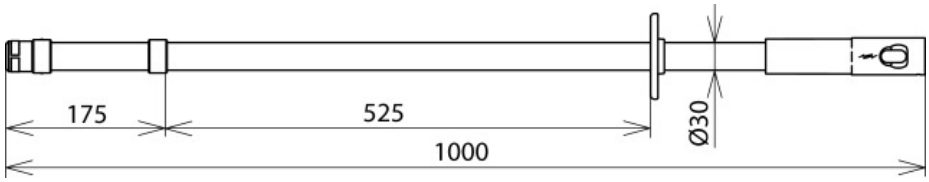


Figure without obligation

Type Part No.	IS 36 SK STK 1000 766 100
Nominal voltage (U_N)	1 ... 36 kV
Total length (l_G)	1000 mm
Insulating clearance (l_I)	525 mm
Handle length (l_H)	300 mm
Insertion depth (l_O)	175 mm
Standard (insulating stick)	DIN VDE V 0681-1
For	Indoor and outdoor installations
Material	Glass-fibre reinforced polyester tube
Diameter	30 mm
For use at	✷
Supporting head for	Hexagon shaft
Anti-rotation plug-in coupling including end fitting	Yes
Type of device	Insulating stick
Weight	400 g
Customs tariff number (Comb. Nomenclature EU)	82055980
GTIN	4013364125117
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.