# PHE3 6 S (767 706)

- Easy transport due to detachable insulating stick (M12) and test prod
- Insulating stick with plug-in coupling for extending the handle



Figure without obligation

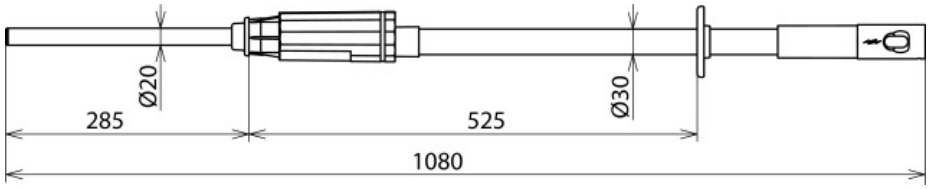



Figure without obligation

| Type<br>Part No. | PHE3 6 S<br>767 706 |
|---|---|
| Nominal voltage ($U_N$) | 6 kV |
| Type of voltage | a.c. |
| Frequency | 50 Hz |
| Category | S 60 |
| Total length ($l_G$) | 1080 mm |
| Insertion depth ($l_O$) | 285 mm |
| Length (indicator with test prod) | 455 mm |
| Standard | EN/IEC 61243-1 (DIN VDE 0682-411) |
| Temperature range | -25 °C ... +55 °C, climatic category N |
| Design | Complete |
| For use at | |
| For | Indoor and outdoor installations |
| Application | Switchgear installations and overhead lines |
| Design | Single-pole |
| Indication | Acoustic and visual |
| Self-testing element | Yes |
| Material (test electrode) | Copper alloy/gal Sn |
| Material (test prod) | Glass-fibre reinforced epoxy resin tube |
| Material (indicator) | Plastic, fully insulated |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| Weight | 1,01 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303370 |
| GTIN | 4013364070837 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.