





Similar to illustration

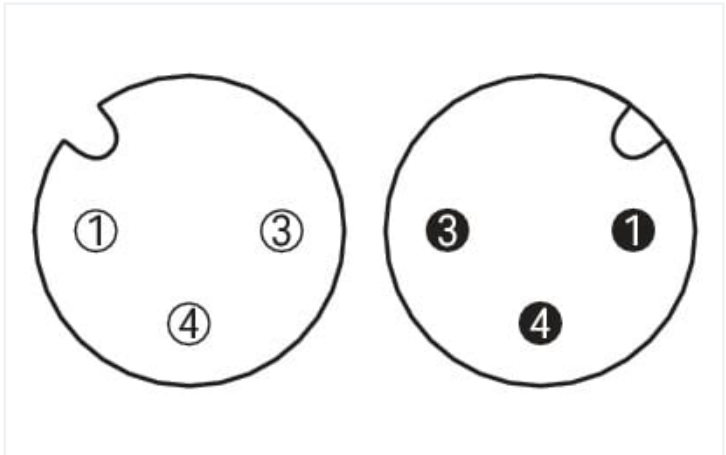

Pin 1 ... 4: 0.34 mm²

1	brown	1
3	blue	3
4	black	4

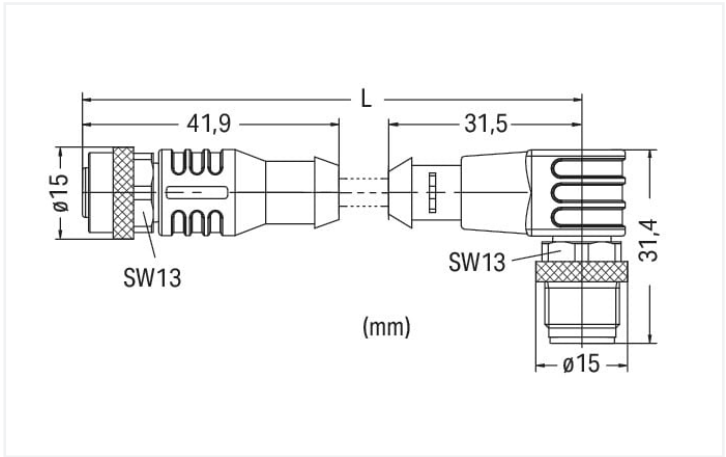

Dimensions in mm

- Short description:**
- PUR, halogen-free
 - Suitable for drag chains
 - High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
 - High chemical resistance
 - Cable used: UL listed

Technical data			
General information		Drag chain compatible	
Operating voltage	250 VAC/DC	Bending radius	10 x cable diameter (min.)
Operating current	4 A	Bending cycles	2 million
Rated surge voltage	2.5 kV	Acceleration (min.)	5 m/s ²
Insulation resistance	> 10 ⁹ Ω	Travel speed (max.)	3.33 m/s
Contact resistance	10 mΩ	Travel path (horizontal) max.	5 m
Conductor resistance	≤ 60 Ω/km	Travel path (vertical) max.	2 m
Pollution degree	3 per VDE 0110	Torsional capacity	180 °/m
Protection type	IP67		
Ambient (operating) temperature (static)	-50 ... +90 °C		
Ambient (operating) temperature (dynamic)	-25 ... +90 °C		



Cable	
Cable length	2 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.1 ... 4.5 mm

Connector	
Connection type	M12 Socket - M12 plug
Pole number	3
Cable connection direction to mating direction	0 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adapter) 1 1	A-coded
Connector interface coding (cable/adapter) 2 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data	
eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	HU
GTIN	4044918975070
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 756-5402/030-020	



Documentation				
System Description			Bid Text	
IP67 Cables and Plug-gable Connectors	pdf 157.80 KB		756-5402/030-020	
			19.02.2019	xml 3.21 KB
			756-5402/030-020	
			20.09.2017	doc 26.50 KB

CAD/CAE-Data	
CAE data	
WSCAD Universe 756-5402/030-020	