

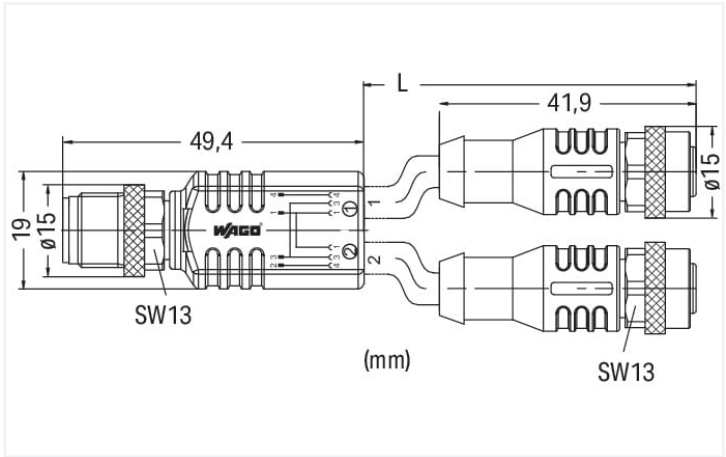


Data Sheet | Item Number: 756-5516/040-010
Sensor/Actuator cable; 2xM12 socket; straight; M12A plug; straight; 4-pole; Length: 1 m
<https://www.wago.com/756-5516/040-010>

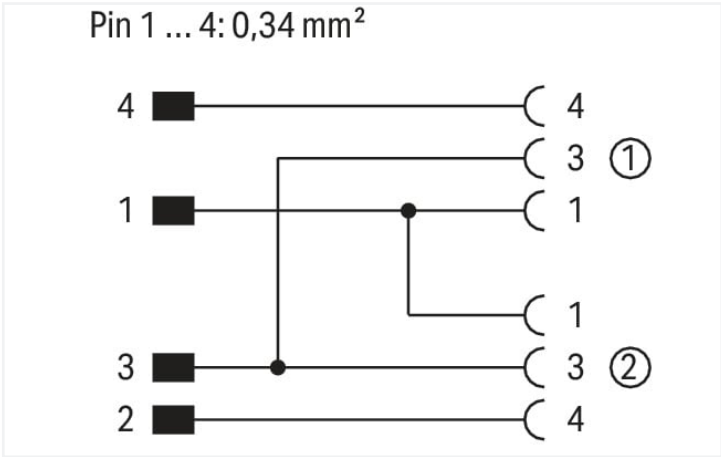

Similar to illustration

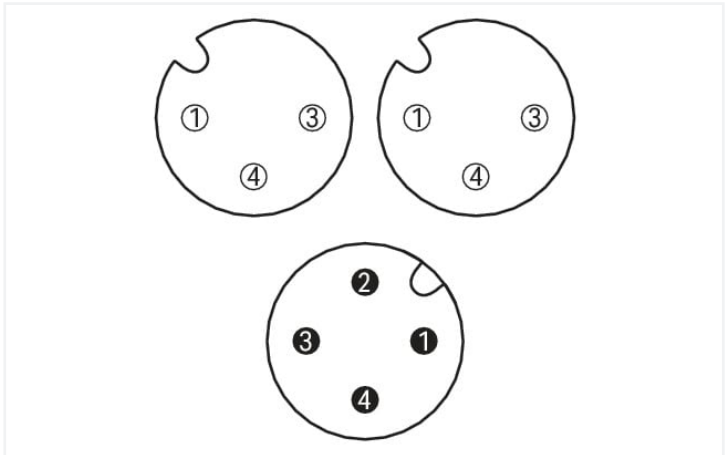

Dimensions in mm

- Short description:**
- PUR, halogen-free
 - Suitable for drag chains
 - High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
 - High chemical resistance
 - Cable used: UL listed

Technical data			
General information		Drag chain compatible	
Operating voltage	250 VAC/DC	Bending radius	10 x cable diameter (min.)
Operating current	4 A	Bending cycles	2 million
Rated surge voltage	2.5 kV	Acceleration (min.)	5 m/s ²
Insulation resistance	> 10 ⁹ Ω	Travel speed (max.)	3.33 m/s
Contact resistance	10 mΩ	Travel path (horizontal) max.	5 m
Conductor resistance	≤ 60 Ω/km	Travel path (vertical) max.	2 m
Pollution degree	3 per VDE 0110	Torsional capacity	180 °/m
Protection type	IP67		
Ambient (operating) temperature (static)	-50 ... +90 °C		
Ambient (operating) temperature (dynamic)	-25 ... +90 °C		



Cable	
Cable length	1 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.5 ... 4.9 mm

Connector	
Connection type	M12 Socket; M12 Socket - M12 plug
Pole number	4
Cable connection direction to mating direction	0 °
Cable connection direction to mating direction (2)	0 °
Connector interface coding (cable/adapter) 1 1	A-coded
Connector interface coding (cable/adapter) 1 2	A-coded
Connector interface coding (cable/adapter) 2 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data	
eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918994859
Customs tariff number	85444290900

Environmental Product Compliance	
CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	24bae0a4-e45a-4cd0-bd8b-6141f1be65ee
SCIP notification number (Belgium)	211d30ff-8997-459b-b512-c7d3b1ce735f
SCIP notification number (Bulgaria)	ebcaea10-e291-47fa-a8f8-835a9652308e
SCIP notification number (Czech Republic)	920621f8-520f-4893-aba3-bacfc85282e2
SCIP notification number (Denmark)	75fca941-77f4-41a2-9625-da11ca94b47a
SCIP notification number (Finland)	d2d2da97-9a53-4ee7-9bf2-1d452ed74fb2
SCIP notification number (France)	4da19154-a356-4f15-848d-582072ae3afb
SCIP notification number (Germany)	af4bfeee-2d9d-4b7a-8926-f648ad06ea75
SCIP notification number (Hungary)	61222768-71ae-4472-bdc0-3c067aee0045
SCIP notification number (Italy)	c743716b-307c-4ff9-868c-737942b87226
SCIP notification number (Netherlands)	a88acbc9-ffe1-4633-9543-5712d4029ead
SCIP notification number (Poland)	70823778-bb27-4fd9-b886-0d2475e7594a
SCIP notification number (Romania)	dfffc115-23d9-43ec-88c6-11268d79ec7c
SCIP notification number (Sweden)	a437e2cc-cbb2-42c8-b363-c3b8435b0b11



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance	756-5516/040-010		

Documentation						
System Description			Bid Text			
IP67 Cables and Plug-gable Connectors	pdf		756-5516/040-010	19.02.2019		
	157.80 KB		xml	3.14 KB		
			756-5516/040-010	20.09.2017		
				doc	26.50 KB	

CAD/CAE-Data			
CAE data			
WSCAD Universe	756-5516/040-010		