
Data Sheet | Item Number: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

https://www.wago.com/210-113



Color: silver-colored

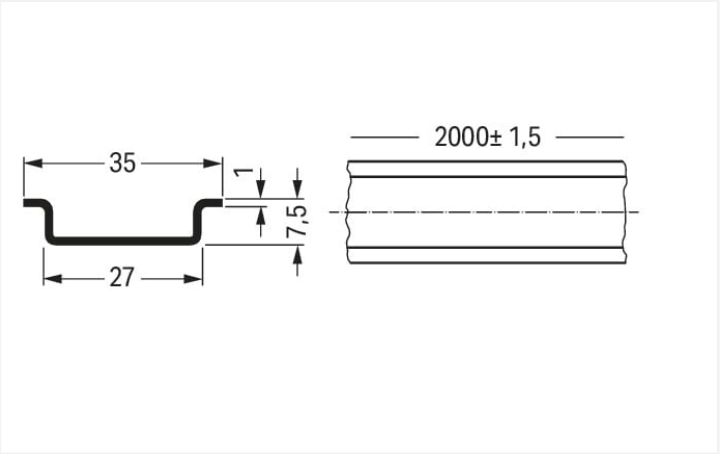

Dimensions in mm

Physical data

Width	2000 mm / 78.74 inches
Height	7.5 mm / 0.295 inches
Depth	35 mm / 1.378 inches

Material data

Color	silver-colored
Fire load	0 MJ
Weight	690 g

Commercial data

Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 8.0	EC001285
ETIM 7.0	EC001285
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	IT
GTIN	4017332272308
Customs tariff number	72169180000

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Continued on next page

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 210-113

Documentation

Bid Text

210-113	31.08.2017	doc 23.50 KB	
210-113	19.02.2019	xml 2.64 KB	

CAD/CAE-Data

CAD data

2D/3D Models 210-113

CAE data

EPLAN Data Portal 210-113

WSCAD Universe 210-113

ZUKEN Portal 210-113

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



Item No.: 209-109
Edge guards; for DIN 35 rail (7.5 mm high); gray



Item No.: 209-137
Mounting adapter; can be used as end stop; 6.5 mm wide; gray



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Continued on next page

1.1.2 Marking

1.1.2.1 Label



Item No.: 210-808
Labels; for Smart Printer; 9.5 x 25 mm; white



Item No.: 210-708
Labels; for TP printers; 9.5 x 25 mm; white

Installation Notes

DIN-Rail	Item No.	Current [A]	Acc. to mm²/AWG/Cu
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0

Current applies to rails of 1 m/3'3" length

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above. Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).