
Data Sheet | Item Number: 706-100/625-300

Connection cable; 25-pole; with solder pin; Female connector; open-ended; Length: 3 m; Conductor cross-section: 0.25 mm²

https://www.wago.com/706-100/625-300

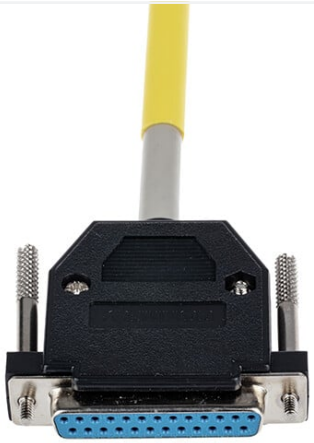

Color coding acc. to DIN VDE 47100	25 poles female Sub-D connector Pin number
White	1
Brown	2
Green	3
Yellow	4
Grey	5
Pink	6
Blue	7
Red	8
Black	9
Violet	10
Grey-Pink	11
Red-Blue	12
White-Green	13
Brown-Green	14
White-Yellow	15
Yellow-Brown	16
White-Grey	17
Grey-Brown	18
White-Pink	19
Pink-Brown	20
White-Blue	21
Brown-Blue	22
White-Red	23
Brown-Red	24
White-Black	25
Shield	Connected to Sub-D

Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Operating voltage	≤ AC/DC 125 V
Current per wire (max.)	2 A

Connection data

Cable type	LiYCY
Color code	per DIN VDE 47100

Connection 1

Connector	D-subminiature female connector
Pole number 1	25
Connection type 1	System
Wire cross-section	0.25 mm²

Connection 2

Connector 2	open-ended
Connection type 2	open-ended

Physical data

Cable length	3 m

Material data

Fire load	0 MJ
Weight	587 g

Environmental requirements

Ambient temperature (operation)	-20 … +50 °C

Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821835677
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/625-300