
Data Sheet | Item Number: 756-3205/140-100

Connecting cable; 14-pole; Length: 10 m

https://www.wago.com/756-3205/140-100




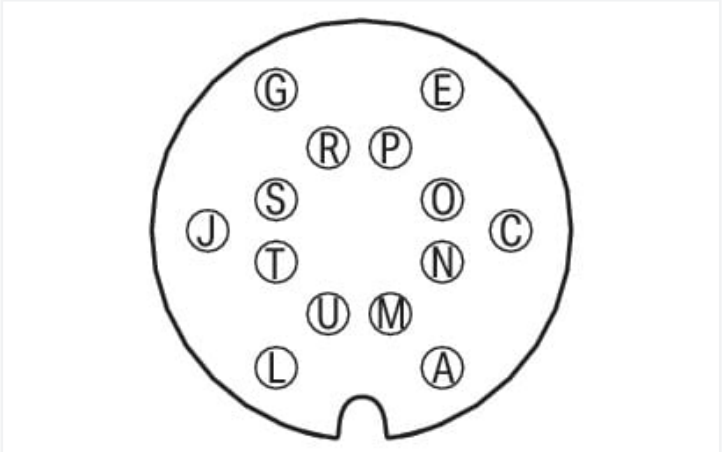

Color: ■ black

Pin A, L: 0.75 mm²
Pin C - J, N - T: 0.34 mm²

A	brown	N	pink-brown
C	white-pink	O	violet
E	black	P	white
G	pink	R	red
J	green	S	gray
L	blue	T	yellow
M	commoned with A	U	commoned with L

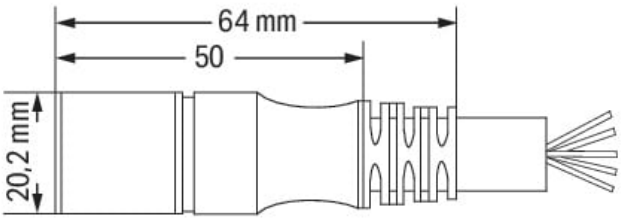

Dimensions in mm

Technical data

Connection type	M16 socket - free end
Pole number	14
Cable connection direction to mating direction	0 °
Cable length	10 m
Operating voltage	150 V
Operating current	4 A 6 mm² 0,75 A
Rated surge voltage	1.2 kV

Mechanical data

Bending cycles	2 million
Drag chain capability	Yes
Sheathed cable diameter	8.9 … 9.3 mm
Weight	1016 g
Color	black

Environmental requirements

Ambient (operating) temperature (dynamic)	-30 … +90 °C
Ambient (operating) temperature (static)	-40 … +90 °C
Protection type	IP67
Fire load	0 MJ

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918978514
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-3205/140-100

Documentation

System Description

Sensor/Actuator Boxes – General Product Information	pdf 428.34 KB	

CAD/CAE-Data

CAE data

WSCAD Universe 756-3205/140-100