

Data Sheet | Item Number: 706-100/537-100

Connection cable; 37-pole; with solder pin; Male connector; open-ended; Length: 1 m; Conductor cross-section: 0.25 mm²

https://www.wago.com/706-100/537-100

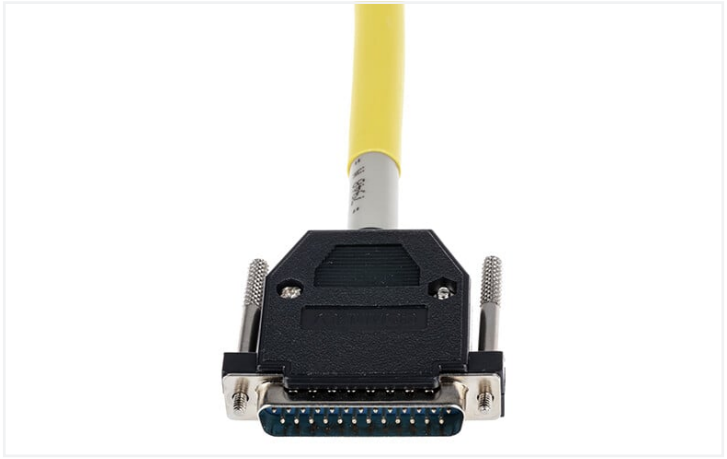

Similar to illustration

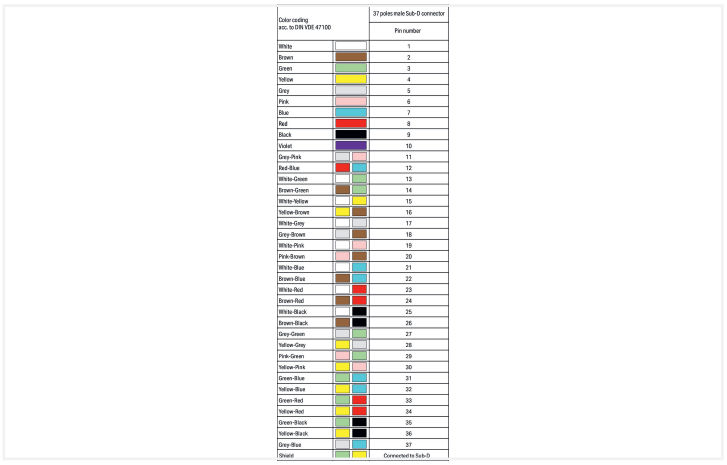

Color coding acc. to DIN VDE 47100		37 poles male Sub-D connector Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
Yellow-Brown		16
White-Grey		17
Grey-Brown		18
White-Pink		19
Pink-Brown		20
White-Blue		21
Brown-Blue		22
White-Red		23
Brown-Red		24
White-Black		25
Brown-Black		26
Grey-Green		27
Yellow-Grey		28
Pink-Green		29
Yellow-Pink		30
Green-Blue		31
Yellow-Blue		32
Green-Red		33
Yellow-Red		34
Green-Black		35
Yellow-Black		36
Grey-Blue		37
Shield		Connected to Sub-D

Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Cable type	LiYCY
Color code	per DIN VDE 47100

Connection 1

Connector	D-subminiature male connector
Pole number 1	37
Connection type 1	System
Wire cross-section	0.25 mm²

Connection 2

Connector 2	open-ended
Connection type 2	open-ended

Physical data

Cable length	1 m

Material data

Fire load	0 MJ
Weight	1.1 g

Environmental requirements

Ambient temperature (operation)	-20 … +50 °C

Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821835493
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/537-100