

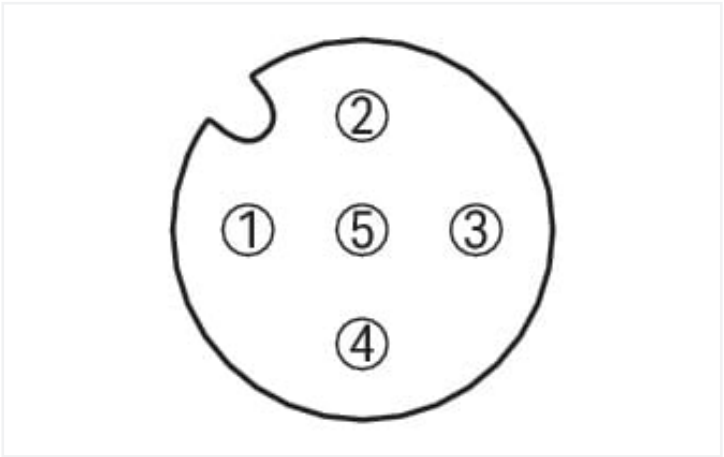


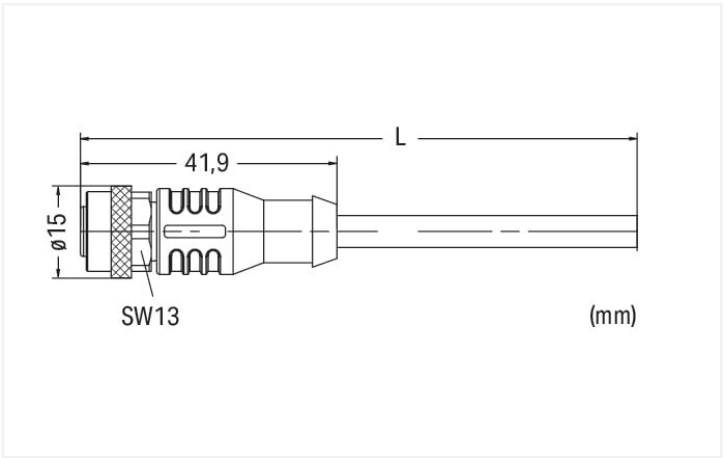

Similar to illustration

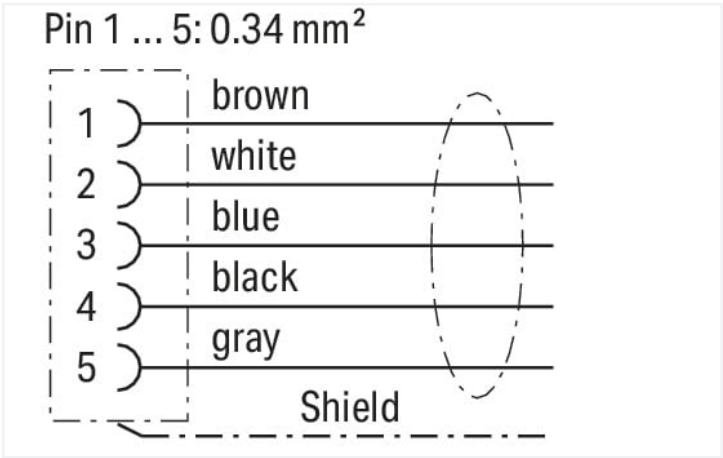

Dimensions in mm

- Short description:**
- PUR, halogen-free
 - Suitable for drag chains
 - High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
 - High chemical resistance
 - Cable used: UL listed

Technical data			
General information		Drag chain compatible	
Operating voltage	250 VAC/DC	Bending radius	Fixed: >4xØ; Flexible: >7.5xØ
Operating current	4 A	Bending cycles	2 million
Rated surge voltage	1.5 kV	Acceleration (min.)	10 m/s ²
Insulation resistance	≥ 1.6x10 ¹⁰ Ω/km	Travel speed (max.)	4 m/s
Contact resistance	10 mΩ	Travel path (horizontal) max.	15 m
Conductor resistance	< 57 Ω/km	Torsional capacity	180 °/m
Pollution degree	3 per VDE 0110		
Protection type	IP67		
Ambient (operating) temperature (static)	-50 ... +90 °C		
Ambient (operating) temperature (dynamic)	-25 ... +90 °C		



Cable	
Cable length	10 m
Type code	Li9YC11Y-HF 5x0.34 mm²
Overall shield	Tinned copper braid, optical coverage approx. 80 %
Conductor configuration	Bare copper wire (7 x 0.25 mm)
Conductor insulation	Halogen-free PE
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	6.3 ... 6.7 mm

Connector	
Connection type	M12 Socket - free end
Pole number	5
Cable connection direction to mating direction	0 °
Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data	
eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454942021
Customs tariff number	85444290900

Environmental Product Compliance	
CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	fae8d8c0-df8c-471d-bcc2-69a9c3d90237
SCIP notification number (Belgium)	e6305deb-9494-4110-9929-d8b562fd891a
SCIP notification number (Bulgaria)	1addc3a0-2119-4108-8345-06396abb4876
SCIP notification number (Czech Republic)	7ea42221-fa65-4448-9d88-65e1bb3d9c7e
SCIP notification number (Denmark)	e2acb678-4e0a-4c90-932e-520e53815596
SCIP notification number (Finland)	da2a9750-ce38-481d-9037-9c8af0ecb760
SCIP notification number (France)	41a5c77b-bb68-4bab-adee-ade87dc228e0
SCIP notification number (Germany)	88840c31-aeec-464f-9e82-a8389749dbd4
SCIP notification number (Hungary)	f58cce41-81ac-4e19-b99e-7a3f21e75845
SCIP notification number (Italy)	364b6f10-55db-475e-9573-b4484d2d0f20
SCIP notification number (Netherlands)	d78501e0-e55f-4e3c-96ef-e8c1701c9e1f
SCIP notification number (Poland)	8901dd89-2e3f-45e7-bb19-6063ee5d4ae8
SCIP notification number (Romania)	be83b88f-82c5-4877-afb4-032b648a4729
SCIP notification number (Sweden)	30cf50e0-1511-44ea-b1b8-41e5b9d5cc9a



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5301/060-100	
---	--

Documentation

System Description

IP67 Cables and Plug- gable Connectors	pdf 157.80 KB	
---	------------------	--

Bid Text

756-5301/060-100	19.02.2019	xml 3.28 KB	
756-5301/060-100	20.09.2017	doc 26.50 KB	

CAD/CAE-Data

CAE data

WSCAD Universe 756-5301/060-100	
------------------------------------	--