
Datasheet

REGIOLUX

Category (ETIM):	Renovation component
Type:	- SDGE For SMT/SPT systems
Order number:	18042964100
Configuration:	Suitable for equipment fitting: T5 2x35/49W G5
Operating device:	Electronic ballast, multi (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	104
Energy efficiency class:	A+
Energy efficiency class CELMA EEI:	A2
Certifications:	IP 20, protection class I, F, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	1.1
Dimensions LxWxH/DxH (mm):	1533 x 55 x 77
mounting method:	Mounting rail system mounting
EAN-number:	4020863217564
Commodity code:	94051098

SDGE T5 2x35/49W G5 • vw • ECG • 18042964100

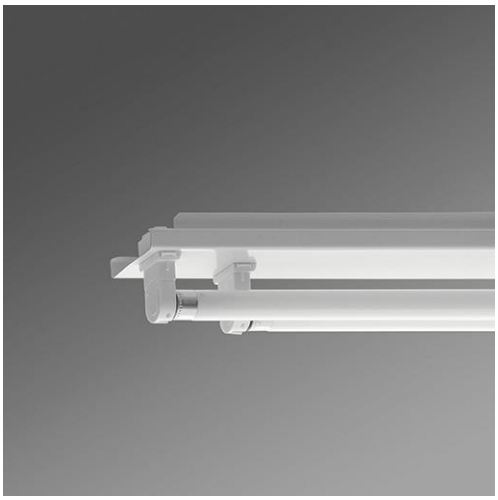

Lighting technology
open distribution-direct/indirect distribution
SDGE Schnellmontage-Systemkomponente 2x T5

Renovation component, open distribution made of Steel
Renovation device mount made of galvanised, profiled sheet steel; surface with polyester resin enamel coating; with two rotary catches for rapid mounting in the mounting rail. Suitable for mounting reflectors and mirrors;open distribution;Heat-resistant cables including fixed 3-pole rapid installation plug connector for the mounting rail systems SMT and SPT with tool-free phase preselection and locating finger.

Dimensions LxWxH/DxH (mm): 1533 x 55 x 77
Configuration: Suitable for equipment fitting: T5 2x35/49W G5
Operating device: Electronic ballast, multi (1 pcs.)
System performance (W): 104
Energy efficiency class: A+
Energy efficiency class CELMA EEI: A2
Certifications: IP 20, protection class I, F, Indoor, CE

Regiolux GmbH
Type: SDGE T5 2x35/49 EVG vw
Article number: 18042964100
Product deep link: http://www.regiolux.de/de/article/18042964100