Datasheet

REGIOLUX

Category (ETIM):	Device mounts
Type:	Device mount IP20-SDGOT LED
Order number:	18520276600
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI + emergency lighting 3 hours (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	39
Ballast lumen factor BLF (emergency lighting mode):	10.4
Luminaire luminous flux (lm):	6000
lm/W:	155
Energy efficiency class:	A++
Certifications:	IP 20, protection class I, F, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	2.6
Dimensions LxWxH/DxH (mm):	1531 x 55 x 37
mounting method:	Mounting rail system mounting
EAN-number:	4020863325528
Commodity code:	94051098

SDGOT LED 6000lm 840 • vw • EM pack 3h DALI • 18520276600

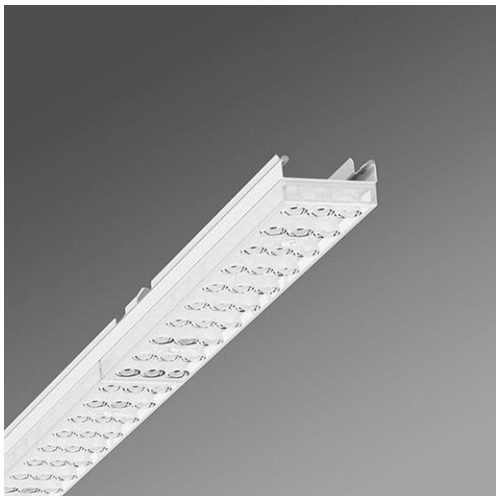

Lighting technology
Individual.Lens.Optic-direct narrow distribution
SDGOT LED 6000 lm 840



ηLB	100 %
lm/W	155
Φ ↓/↑	100 % / 0 %
UGR q/l	19.9 / 20.5



Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Housing colour traffic white RAL 9016; Direct, narrow-beam light distribution by means of individual. lens. optic made of acrylic glass. Optically seamless light run. With 3 hours emergency lighting battery and integrated status indicator; 3 hours emergency lighting operation. Heat-resistant cables including permanently fixed, 4-pole (or dimmable versions: 6-pole) quick-mount plug connector with tool-less phase pre-selection and locating finger; one wire of the through-wiring can be used as un-switched charging phase using an additional pole on the plug connector;

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 6000
lm/W: 155
Operating device: Electronic driver DALI + emergency lighting 3 hours (1 pcs.)
System performance (W): 39
Ballast lumen factor BLF (emergency lighting mode): 10.4
Energy efficiency class: A++
Certifications: IP 20, protection class I, F, DIN10500/Food, Indoor, CE

Regiolux GmbH
Type: SDGOT LED 6000 840 NL-B3 DALI vw
Article number: 18520276600
Product deep link: http://www.regiolux.de/de/article/18520276600
5 year guarantee after registration on website.