
Datasheet


REGIOLUX

Category (ETIM):	Device mounts
Type:	Device mount IP20-SDGODA LED
Order number:	18560176600
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI + emergency lighting 3 hours (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	26
Ballast lumen factor BLF (emergency lighting mode):	14.5
Luminaire luminous flux (lm):	4000
lm/W:	163
Energy efficiency class:	A++
Certifications:	IP 20, protection class I, BAP 65°<1500, F, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	2.6
Dimensions LxWxH/DxH (mm):	1531 x 55 x 37
EAN-number:	4020863325801
Commodity code:	94051098


SDGODA LED 4000lm 840 • vw • EM pack 3h DALI • 18560176600

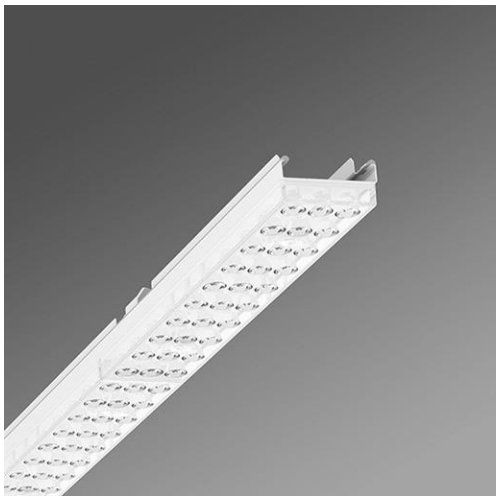

Lighting technology
Individual.Lens.Optic-direct Batwing distribution
SDGODA LED 4000 lm 840



ηLB	100 %
lm/W	163
Φ ↓/↑	99 % / 1 %
UGR q/l	19.3 / 17.4
BAP	65° < 1500cd/m²



Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Housing colour traffic white RAL 9016; Direct, double asymmetric light distribution using individual. lens. optic made of matt acrylic glass, lateral diffuser profile made of matt acrylic glass with inner longitudinal prisms for optimised glare suppression. Optically seamless light run. With 3 hours emergency lighting battery and integrated status indicator; 3 hours emergency lighting operation. Heat-resistant cables including permanently fixed, 4-pole quick-mounting plug connector with tool-less phase pre-selection and locating finger; one wire from the through-wiring can be used as un-switched charging phase using an additional pole on the plug connector;

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4000
lm/W: 163
Operating device: Electronic driver DALI + emergency lighting 3 hours (1 pcs.)
System performance (W): 26
Ballast lumen factor BLF (emergency lighting mode): 14.5
Energy efficiency class: A++
Certifications: IP 20, protection class I, BAP 65°<1500, F, DIN10500/Food, Indoor, CE

Regiolux GmbH
Type: SDGODA LED 4000 840 NL-B3 DALI vw
Article number: 18560176600
Product deep link: http://www.regiolux.de/de/article/18560176600
5 year guarantee after registration on website.