
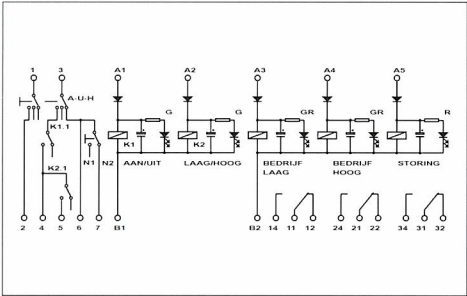


HLS-1

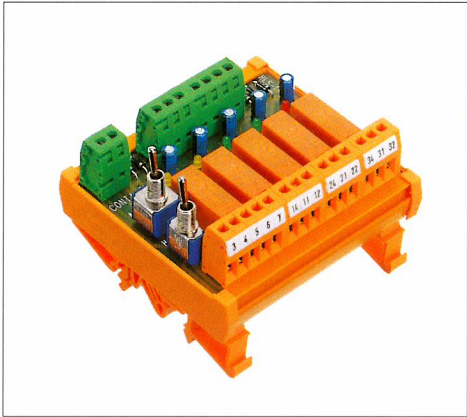

Typ Type	Best.-Nr. Cat. no.	Länge mm Length mm
HLS-1	6561.2	93
HLS-1/DC	7975.2	93

24 V ≈ (HLS-1/DC: 24 V-)

1 VA/0,5 W

250 V ≈

6 A/8 A

2000 VA bei 250 V ~, 8 A/192 W bei 24 V-, 8 A

20 ms./100 ms.

AgNi

> 1,5 x 10⁵ Schaltungen
> 1,5 x 10⁵ Cycles
> 1 x 10⁷ Schaltungen
> 1 x 10⁷ Cycles

Silber, vergoldet
Silver, gold plated
> 100 000 Schaltspiele
> 100 000 Cycles
24 V/2 A



4 kV

0 °C...+ 55 °C

87 x 67 mm/63 mm

0,2 – 2,5 mm² Schraubanschluss/7 mm
AWG 22 – 14 screw connection/7 mm

HLS-2

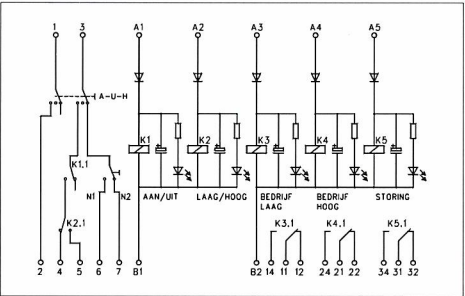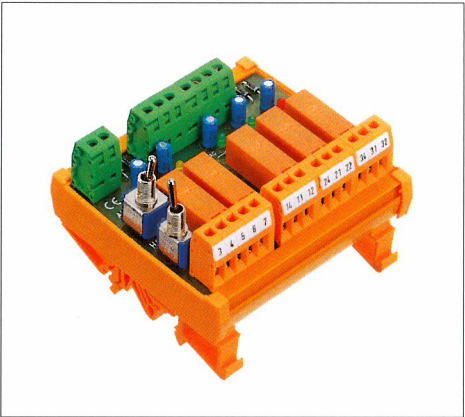

Typ Type	Best.-Nr. Cat. no.	Länge mm Length mm
HLS-2	7877.2	93
HLS-2/DC	6833.0	93

24 V ≈ (HLS-2/DC: 24 V-)

1 VA/0,5 W

250 V ≈

6 A/8 A

2000 VA bei 250 V ~, 8 A/192 W bei 24 V-, 8 A

20 ms./100 ms.

AgNi

> 1 x 10⁵ Schaltungen
> 1 x 10⁵ Cycles
> 1 x 10⁷ Schaltungen
> 1 x 10⁷ Cycles

Silber, vergoldet
Silver, gold plated
> 100 000 Schaltspiele
> 100 000 Cycles
24 V/2 A



4 kV

0 °C...+ 55 °C

87 x 67 mm/63 mm

0,2 – 2,5 mm² Schraubanschluss/7 mm
AWG 22 – 14 screw connection/7 mm

HLSW-3

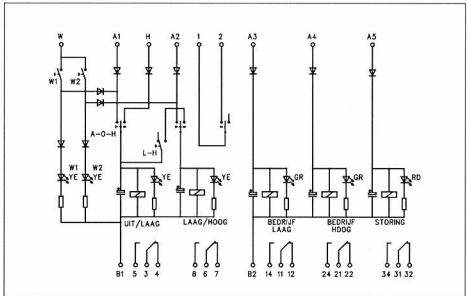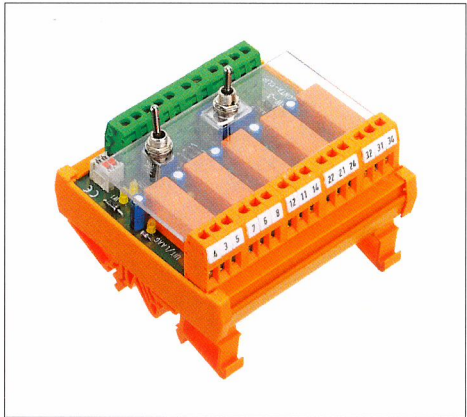

Typ Type	Best.-Nr. Cat. no.	Länge mm Length mm
HLSW-3	15042.2	94

24 V ≈

1 VA/0,5 W

250 V ≈

6 A/8 A

2000 VA bei 250 V ~, 8 A/192 W bei 24 V-, 8 A

20 ms./100 ms.

AgNi

> 1,5 x 10⁵ Schaltungen
> 1,5 x 10⁵ Cycles
> 1 x 10⁷ Schaltungen
> 1 x 10⁷ Cycles

Silber, vergoldet
Silver, gold plated
> 100 000 Schaltspiele
> 100 000 Cycles
24 V/2 A

4 kV

0 °C...+ 55 °C

87 x 67 mm/63 mm

0,2 – 2,5 mm² Schraubanschluss/7 mm
AWG 22 – 14 screw connection/7 mm