Permanent Light 800 / Accessories

# Surface housing 3-fold GY



| Part No.: | 975.815.08 |
|---|---|

| MECHANICAL DATA | |
|---|---|
| Length | 266 mm |
| Width | 80 mm |
| Height | 60 mm |
| Materials | ABS |
| Housing colour | Grey |
| Protection category | IP65 |
| Weight with packaging | 300 g |
| Product weight | 300 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage type | AC |


| APPROVAL DATA | |
|---|---|
| Conforms with RoHS directive | Fulfills substance restriction |
| WEEE | No |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | No |
| Conforms with UKCA (Importer) | No |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Permanent Light 800 / Accessories

# Surface housing 3-fold GY

## DRAWING

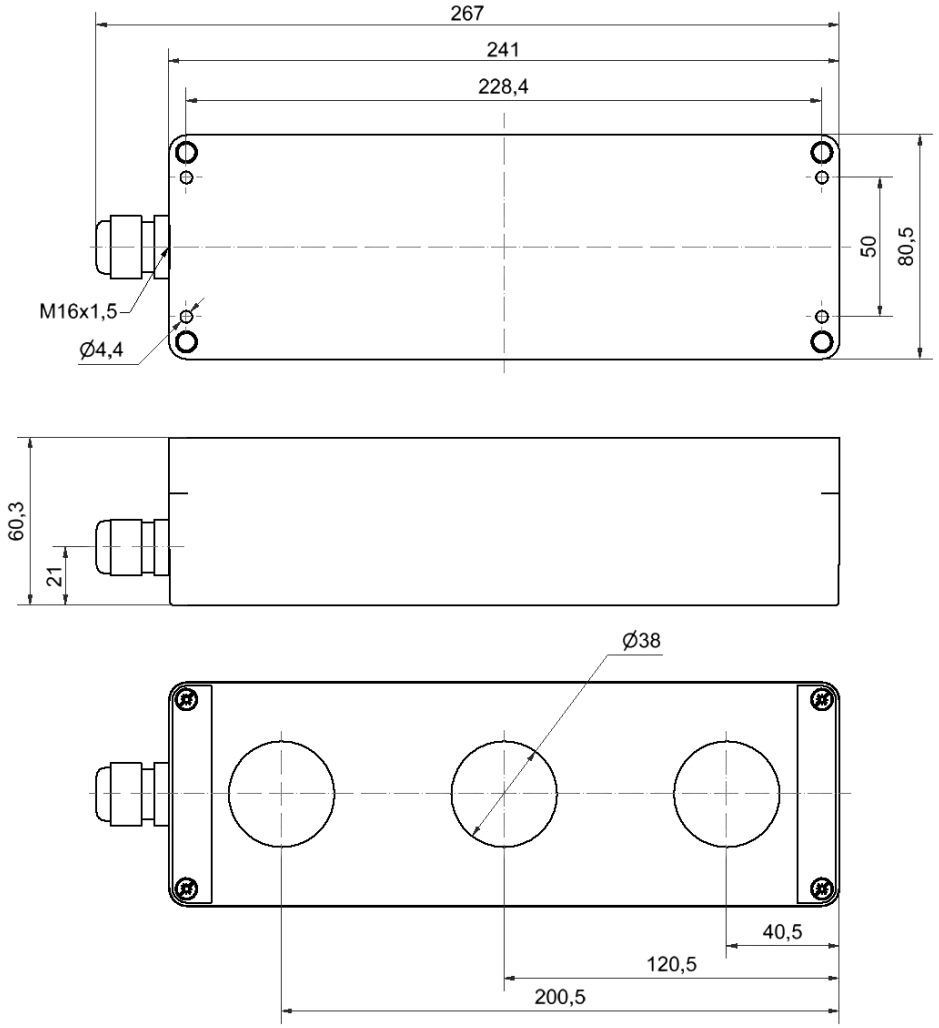


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.