
PRODUCT DATASHEET
LS AY SUP -SE/P + SILICONE SEAL

Connectors for LED Strips Superior Class | Connectors for LED Strips Superior Class

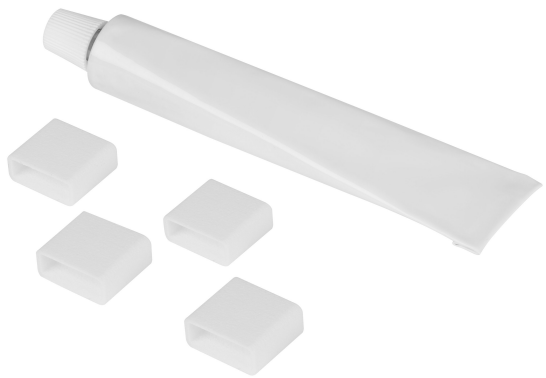

Areas of application

- General outdoor illumination

Product benefits

- Easy installation of connector, no manual wiring required
- Tool-free installation

© 2022, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Dimensions & Weight

Length	17.0 mm
Width	11,0 mm
Height	6.5 mm
Product weight	4.23 g

Colors & materials

Product color	Transparent

Temperatures & operating conditions

Ambient temperature range	-20…+50 °C
Temperature range in operation	-20…+50 °C

LOGISTICAL DATA

Temperature range at storage	0…+30 °C

DOWNLOAD DATA

	DOWNLOAD DATA
PDF	Catalogs LEDVANCE LED Strip System - Wave 2 - Fall 2020 (EN)

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075304659	BAG 4	80 mm x 120 mm x 5 mm	17.90 g	0.05 dm^3
4058075304666	Shipping box 200	213 mm x 213 mm x 215 mm	974.00 g	9.75 dm^3
4058075304673	Shipping box 800	439 mm x 439 mm x 233 mm	4663.00 g	44.90 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2022, LEDVANCE GmbH. All rights reserved.