PRODUCT DATASHEET
LF -4PIN FLEX

LINEARlight Colormix Flex | – Accessories



Product benefits

- Simple installation, no tools or soldering required (CONNECTsystem)
- Reduced installation time (CONNECTsystem)
- Low profile (CONNECTsystem)
- Extremely vibration-proof (CONNECTsystem)
- Permissible operating temperature perfectly matched to module (CONNECTsystem)
- Can be connected to the front of the module or at division points (CONNECTsystem)


Product features

- Quick and easy installation
- Compatible with Linearlight Flex
- Compatible with TEC Flex

© 2022, products of OSRAM GmbH, distributed by LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Dimensions & Weight

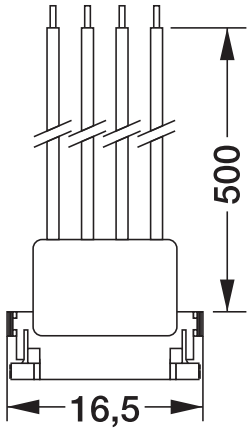

Length	13.2 mm
Width	13,2 mm
Height	5,3 mm
Product weight	6.5 g

DOWNLOAD DATA

	DOWNLOAD DATA
PDF	Advertisements Light is freedom of design (EN)

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321514585	BAG 10	151 mm x 33 mm x 67 mm	93.33 g	0.33 dm^3
4008321514592	Shipping box 100	102 mm x 62 mm x 166 mm	407.33 g	1.05 dm^3
4008321514608	Shipping box 1,000	241 mm x 67 mm x 166 mm	1034.00 g	2.68 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2022, products of OSRAM GmbH, distributed by LEDVANCE GmbH. All rights reserved.

© 2022, products of OSRAM GmbH, distributed by LEDVANCE GmbH. All rights reserved.