


202858
VKHM-Z/VSM-Z/T
Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

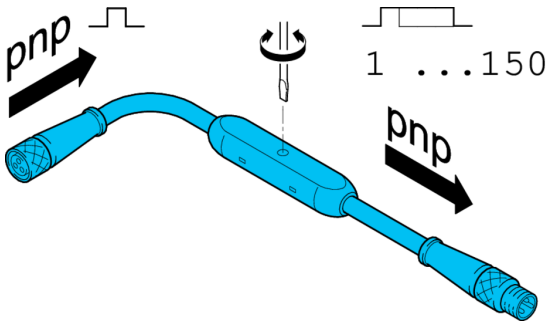

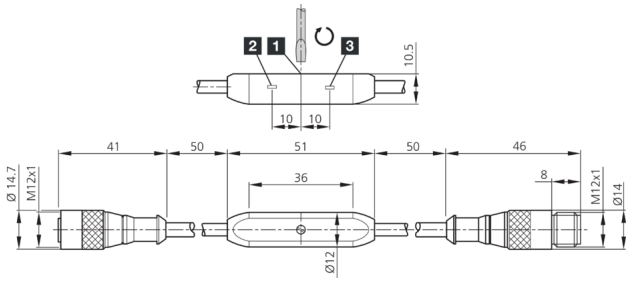

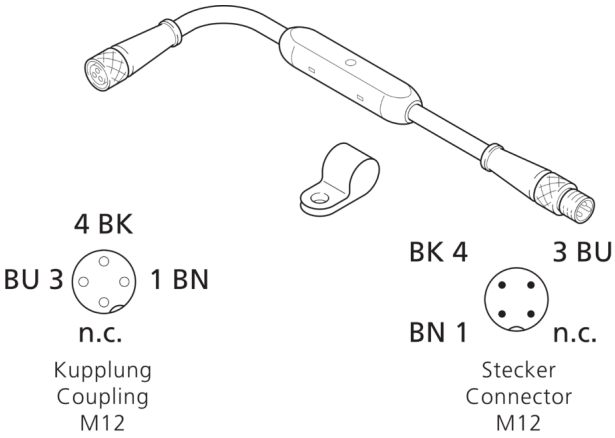

1) Potentiometer (only ...TSM-Z/T)
2) LED STATUS
3) LED SWITCHING OUTPUT

BK: black BN: brown BU: blue

Function

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 … 35 V DC
No-load current (max.)	20 mA
Thread	M12 x 1
Housing material	Plastic
Protection class	III, operation on protective low voltage
Evaluation	pnp pulse stretcher
Application	Digital signal
Switching output	pnp (1 … 150 ms)
Switching frequency	500 Hz
Ambient temperature during operation	-20 … +70 °C
Protection type	IP 67
Connection	Pigtail, Coupling, M12, 3-pin
Connection 2	Pigtail, Connector, M12, 3-pin

More information / accessories	https://www.di-soric.com/202858

© di-soric . Right to change reserved