

202036
WRB 130 SQ-20-0.6
Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible



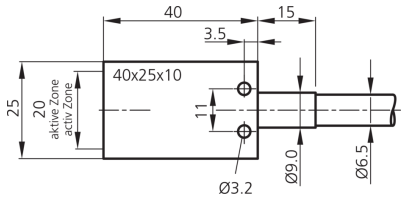

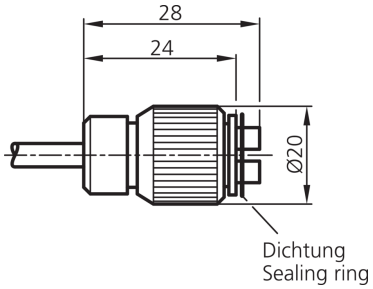

Technical data (typ.)	+20°C, 24 V DC
Length	1,000 mm
Dimension fiber bundle	20 mm x 0.6 mm
Housing length	40 mm
Housing height	10 mm
Housing width	25 mm
Light aperture	axial
Bending radius	> 3 x tube-Ø
Material of fiber	Glass fibers
Material	■ Aluminum (Sensor probe) ■ Silicone-metal sleeve (Coating)
Operating principle	Diffuse sensor
Design	Cuboid design
Single fiber	Ø 0.05 mm
To be used for	Amplifiers for glass fiber optics
Opening angle	67°
Scanning range	210 mm
Temperature resistance	-40 … +180 °C (temporarily up to +250 °C)
Protection type	IP 67

More information / accessories	https://www.di-soric.com/202036

© di-soric . Right to change reserved