

201712
TKHM-W-2.5/4
Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts





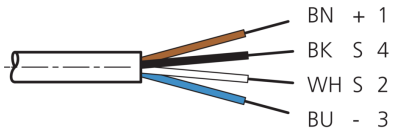

1) Mounting free space from upper edge of plug connector
2) LED (2x) only with TKHM-W- ... / LP

BK: black BN: brown BU: blue WH: white

Function

Technical data (typ.)	
Service voltage	50 V AC / 60 V DC
Length	2,500 mm
Diameter	Ø 4.5 mm (Diameter)
Thread	M8 x 1
Material of cable	Polyurethane
Drag chain properties	45 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Angled / open cable end
Characteristics	Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-25 … +85 °C (Movable, Fixed)
Protection type	IP 65 / IP 66K / IP 67
Connection	Socket, M8, 4-pin, A-coded
Cross-section	0.25 mm^2 (4 x)

More information / accessories	https://www.di-soric.com/201712

© di-soric . Right to change reserved