

# 201913
# WRB 110 MQ-90-10-0.6
# Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

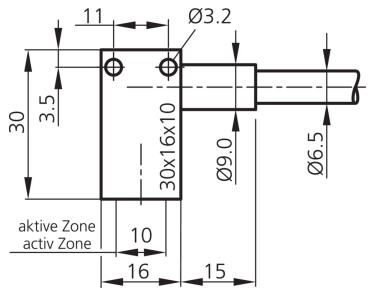

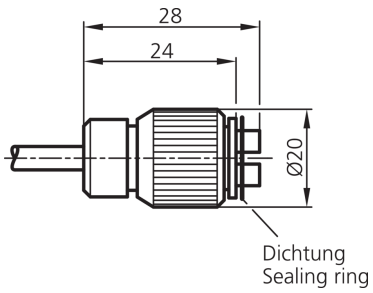


| Technical data (typ.) | +20°C, 24 V DC |
|---|---|
| Length | 300 mm |
| Dimension fiber bundle | 10 mm x 0.6 mm |
| Housing length | 30 mm |
| Housing height | 10 mm |
| Housing width | 16 mm |
| Light aperture | radial |
| Bending radius | > 10 x tube-Ø |
| Material of fiber | Glass fibers |
| Material | ■ Aluminum (Sensor probe)<br>■ metal sleeve (Coating) |
| Operating principle | Diffuse sensor |
| Design | Cuboid design |
| Single fiber | Ø 0.05 mm |
| To be used for | Amplifiers for glass fiber optics |
| Opening angle | 67° |
| Scanning range | 85 mm |
| Temperature resistance | -40 … +180 °C (temporarily up to +300 °C) |
| Protection type | IP 60 |

| More information / accessories | https://www.di-soric.com/201913 |
|---|---|


© di-soric . Right to change reserved