

203648
VO-M12/10-4.5-2.5
Focus optics

- For operating color sensors with fiber optic connection
- Robust design

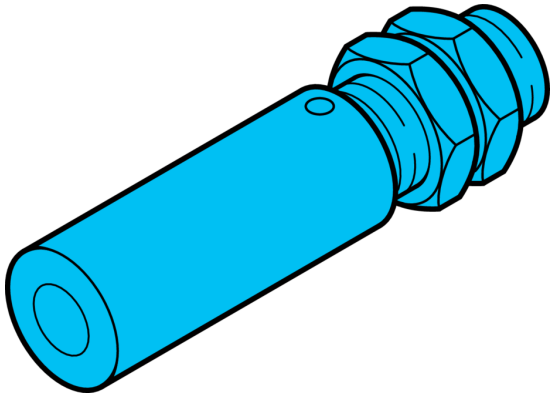

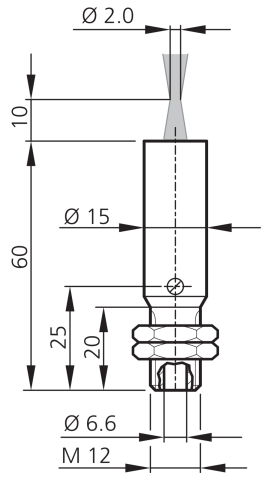

Technical data (typ.)	+20°C, 24 V DC
Component	Focus optics
Operation with	WRB 120 S-SG-4.5-2.5, WRB 120 P-SG-4.5-2.5
For FSB 10 M G1-B8	To be used with WRB 120 S-SG-4.5-2.5, To be used with WRB 120 P-SG-4.5-2.5
For FSB 50 M 60 G3-B8	To be used with WRB 120 S-SG-4.5-2.5, To be used with WRB 120 P-SG-4.5-2.5
For FS 50 M G3-B8	To be used with WRB 120 S-SG-4.5-2.5, To be used with WRB 120 P-SG-4.5-2.5
For FS 12-100-1 M G3-B8	To be used with WRB 120 S-SG-4.5-2.5, To be used with WRB 120 P-SG-4.5-2.5
For FS 12-100-1 M G3-B8-E	To be used with WRB 120 S-SG-4.5-2.5, To be used with WRB 120 P-SG-4.5-2.5
For FS 12-100-2 M G3-B8	To be used with WRB 120 S-SG-4.5-2.5, To be used with WRB 120 P-SG-4.5-2.5
Light spot size	Ø 2 mm
Working distance	10.0 mm
Working range	10 … 15 mm

More information / accessories	https://www.di-soric.com/203648

© di-soric . Right to change reserved