


201637
SK-TPN-10
Sensor clamp

- Input: pnp and npn
- Output functions: pnp normally open, pnp normally closed, npn normally open, npn normally closed
- Pulse stretching
- Robust housing
- DIN-rail mountable

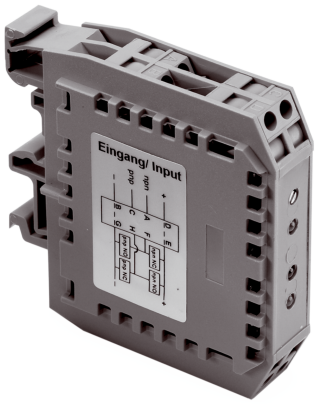



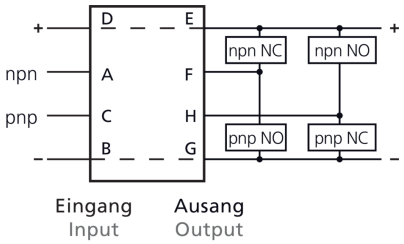

Function

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 … 30 V DC
No-load current (max.)	22 mA
Short-circuit protection	no
Component	Sensor clamp
Switching output	pnp/npn, 100 mA, NO/NC
Pulse stretching	1000 … 10000 ms
Display	LED Green - Service voltage, yellow - pnp opener-NC, Red - pnp closer-NO
Switching frequency	20000 Hz

More information / accessories	https://www.di-soric.com/201637

© di-soric . Right to change reserved