
# **26P-1605:** Press self-filling 16x3/4"



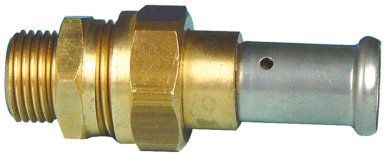

## Commercial information

The body of the fitting is made from CW617N brass. These fittings offer great advantages with regard to corrosion and they are also also better for the environment.

- The fitting has a buffer ring that prevents direct galvanic contact between the aluminium of the pipe and the brass of the fitting.
- This excludes the possibility of electrolysis occurring.
- The fitting is equipped with O-rings made from EPDM and RVS pressure sleeves with 3 inspection windows.
- In order to prevent assembly errors, the dimensions and type of press profile which can be pressed are shown on the RVS sleeves

**Certificates**

ATG, DVGW Wasser, ETA, KIWA, ÖVGW Wasser, WRAS, KOMO, STF, ÖN EN 21003-2/-3, GOST-R, ITC, TSU, QB (CSTBat), AFNOR, ACS, PZH, DNV-GL, Sans 21003, Kontrol Biro, EMI

**Applications**

Potable water, Heating, Compressed air, Cooling, Sanitary

**Solutions**

Building installations, Industry, Utility, Shipbuilding

## Technical characteristics

| | | | |
|---|---|---|---|
| Material connection 1 | Brass | Bend radius | 0 Millimetre |
| Material quality connection 1 | CuZn40Pb2 (CW617N) | Outer pipe diameter connection 1 | 16 Millimetre |
| Surface protection connection 1 | Untreated | Length | 82 Millimetre |
| Surface treatment connection 1 | Untreated | Length of connection 1 | 30 Millimetre |
| Material connection 2 | Brass | Working length connection 1 | 30 Millimetre |
| Material quality connection 2 | CuZn40Pb2 (CW617N) | Length of connection 2 | 16 Millimetre |
| Surface protection connection 2 | Untreated | Working length connection 2 | 16 Millimetre |
| Surface treatment connection 2 | Untreated | Wrench width | 0 Millimetre |
| Shape | Straight | Wrench width union nut | 0 Millimetre |
| Reducing | ✖ | Medium temperature (continuous) | -10\|70 Degrees celsius |
| Eccentric | ✖ | Max. operating pressure at 20 °C | 16 Bar |
| System specific | ✔ | Standard Dimension Ratio (SDR) | 0 |
| Connection 1 | Press sleeve | | |
| Contour code connection 1 | TH | | |
| Nominal diameter connection 2 | 3/4 inch (20) | | |
| Connection 2 | External thread conical BSPT-R (ISO 7-1 / EN 10226-1) | | |
| Material sealing | Ethylene-propylene diene monomer rubber (EPDM) | | |
| With buffer stud | ✔ | | |
| High tensile strength | ✖ | | |
| With thermal insulation | ✖ | | |
| Ring stiffness class | Other | | |
| With sealing rings/gaskets | ✔ | | |
| Capped | ✖ | | |
| With drain valve | ✖ | | |
| With de-aerator | ✖ | | |
| FM quality mark | ✖ | | |
| LPCB quality mark | ✖ | | |
| ULC quality mark | ✖ | | |
| UL quality mark | ✖ | | |
| DIN-CERTCO certificate | ✖ | | |
| VdS quality mark | ✖ | | |
| With approval for TÜV | ✖ | | |
| DVGW quality mark for gas | ✖ | | |
| DVGW quality mark for water | ✔ | | |
| KIWA certified | ✔ | | |
| Gastec QA mark | ✖ | | |
| KOMO certified | ✔ | | |
| Type approval according to BBR/EKS | ✖ | | |

## Related products

| Product code | GTIN | Description | Image |
|---|---|---|---|
| BE16MINI3 | 05414764071391 | Henco Jaw for press machine M-BMINI3 BE/TH-Profile 16mm |  |