
Combination of two-circuit switch and socket outlet with side earthing, complete device incl. faceplate, white

101-62815

4 year warranty

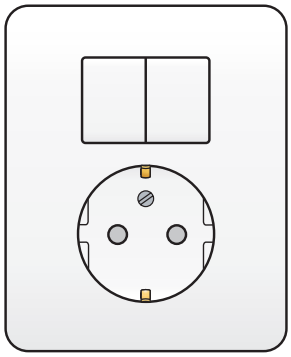

Combination of a flush-mounting two-circuit switch 10 A /250 V AC, with a 2-pole flush-mounting socket outlet 16 A/250 V with side earthing and a faceplate. The combination fits into a single flush-mounting box. Complete device incl. faceplate and pre-assembled finishing set, Finishing colour: white

Technical data

Combination of two-circuit switch and socket outlet with side earthing, complete device incl. faceplate, white

- Colour: white (coloured in mass, approximately RAL 9010)
- Type of earthing: side earthing
- Power: switch: 10 A/250 V AC / wall socket outlet: 16 A/250 V AC
- Flush-mounting frame
  - 1 mm-thick metal
  - galvanized on all sides
  - with 4 grooves
- Material faceplate: The central plate is made of impact-resistant, dustproof and rigid polycarbonate. The base material is coloured in mass.
- Material earthing: side earthing in high quality brass
- Fixing method
  - with screws for simple fixing in a flush-mounting box with grip surfaces
- Wire connection
  - the sockets are equipped with screw terminals for clamping the wires.
- – All plastic components are self-extinguishing (comply with a filament test of 650°C) and are halogen-free.
- Protection degree: IP20
- Protection degree: The combination of a mechanism, a central plate and a faceplate has a protection degree of IP20.
- Impact resistance: The combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Flush-mounting depth: 21 mm
- Marking: CE

10 A 250 Vac
16 A
250 Vac

CE