
Combination of two-circuit switch and socket outlet without earthing, complete device incl. faceplate, cream

100-62415

4 year warranty

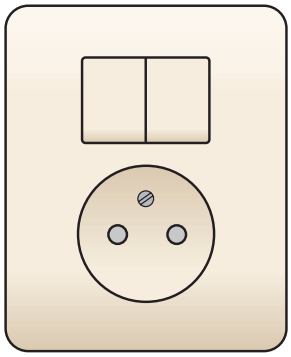

Combination of a flush-mounting two-circuit switch 10 A - 250 V AC, with a 2-pole flush-mounting socket outlet 16 A/250 V, and a faceplate. Complete device incl. faceplate and pre-assembled finishing set, Finishing colour: cream

Technical data

Combination of two-circuit switch and socket outlet without earthing, complete device incl. faceplate, cream

- Colour: cream (coloured in mass, approximately RAL 1013)
- Type of earthing: without earthing
- Power: switch: 10 A/250 V AC / wall socket outlet: 16 A/250 V AC
- Flush-mounting frame
  - 1 mm-thick metal
  - galvanized on all sides
  - with 4 grooves
- Material faceplate: The central plate is made of impact-resistant, dustproof and rigid polycarbonate. The base material is coloured in mass.
- Fixing method
  - with screws for simple fixing in a flush-mounting box with grip surfaces
- Wire connection
  - the sockets are equipped with screw terminals for clamping the wires.
- – All plastic components are self-extinguishing (comply with a filament test of 650°C) and are halogen-free.
- Protection degree: IP20
- Protection degree: The combination of a mechanism, a central plate and a faceplate has a protection degree of IP20.
- Impact resistance: The combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Flush-mounting depth: 22 mm
- Marking: CE

10 A 250 Vac
16 A
250 Vac

CE