

Area of Application:
Bench mounted
Water

Max. working pressure 10 bar
Temperature range 5°C-90°C




Details:
Ceramic headwork open/close 180°
3-Zone colour. acc. to EN13792:2002

Materials in media contact:

Brass
Rubber. EPDM
Silicone based lubricant
Ceramic
POM
SPX (Soft PEX)

Mounting:
½" nut with locking pins, O-ring and washer (See 94G0232)

Inlet / outlet connection:
DN8 hose with G½ female inlet (700mm)
DIN 12 898 hose nozzle

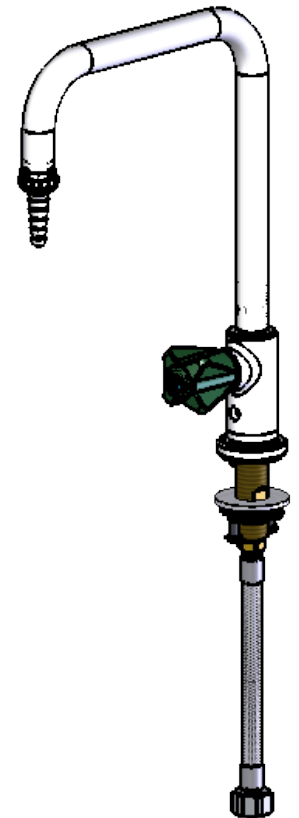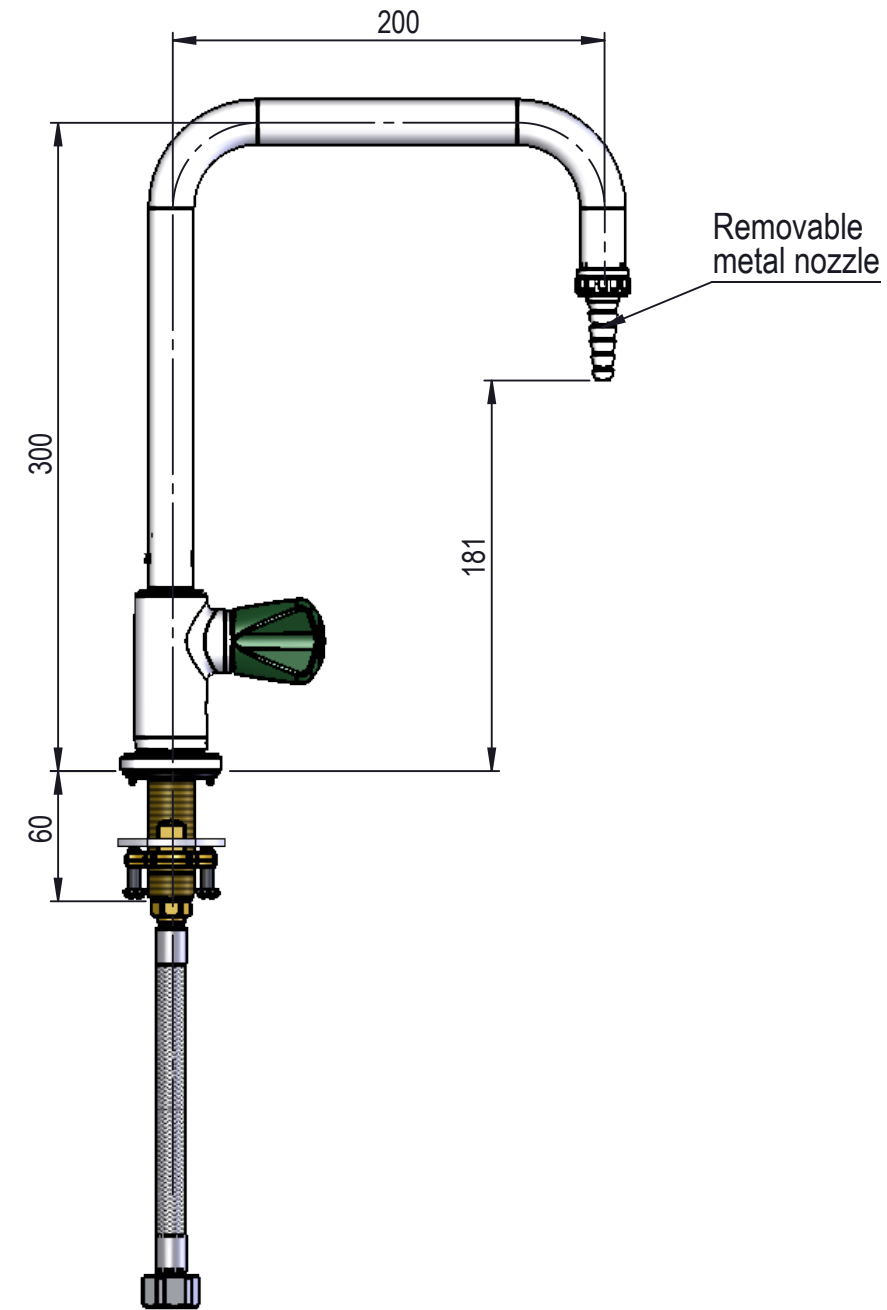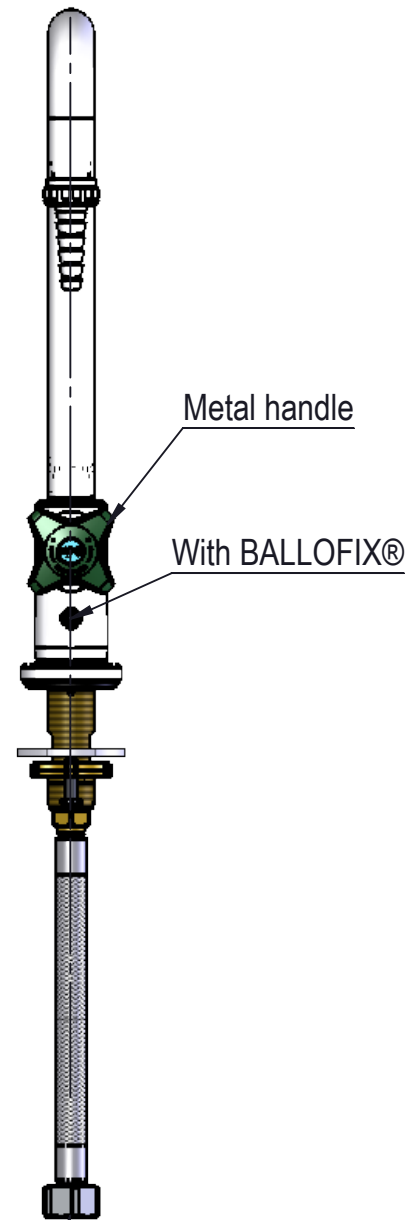

ISO228/1 - G½", Union nut

MEDIA CODE XX FOR WATER
ONE MEDIA FITTING
ACCORDING TO EN 13792
*Model shown for WPC

Media	Media description	Media code XX
WPC	Water potable cold	01
WPH	Water potable hot	02
WCF	Water coolant, feed	05
WCR	Water coolant, return	06
WNC	Water non-potable, cold	07
WNH	Water non-potable, hot	08
WRC	River water cold	33

Description: 1-Valve, Bench mounted, 1-Hole, Swivel, G1/2", Hose									
B	01-03-18			TLA		Media: Water			
C	20-03-19			rek		Comments:			
D	01-03-21			rek		Drawing type: Customer drawing			
E	14-12-21			PEC		Weight: 1.329 Kg			
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by:	Drawn by:	Released on TM No.
							VJE	MWA	Date (DD-MM-YY): 12-12-2014
BROEN-LAB						This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.			
						Format: A3	Drawing No.: 253400283XX-14E		