

Area of Application:
Table mounted
Water

Max. working pressure 10 bar
Temperature range 5°C-90°C


Details:
Ceramic non-closing mixing valve
3-Zone colour, acc. to EN13792:2002

Materials in media contact:
Brass
Rubber, EPDM
Silicone based lubricant
Ceramic
POM


Mounting:
M40x1,5 nut with o-ring and washer

Inlet / outlet connection:
ISO228/1-G1/2
UniFlex

Metal handle

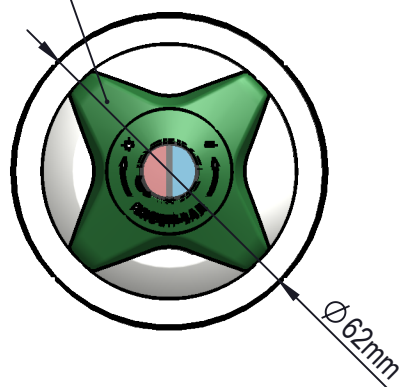

Length of UniFlex connection hose 700mm

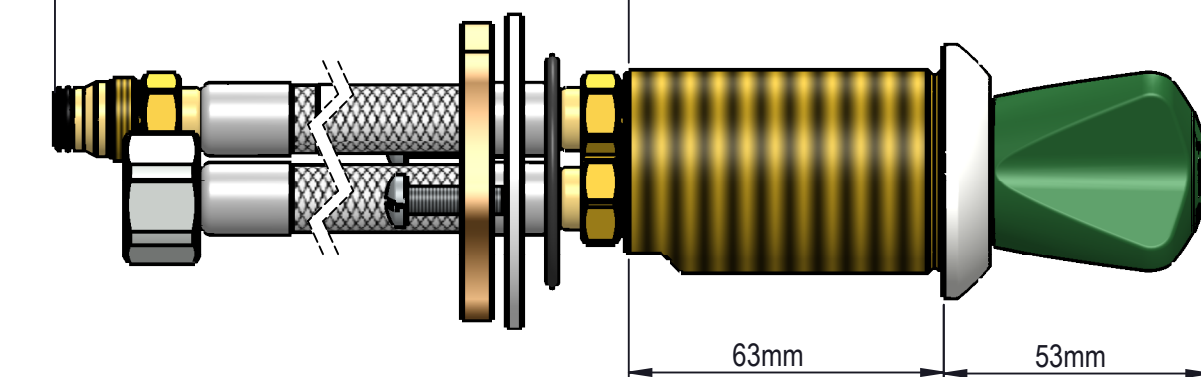

Hot inlet


Cold inlet

Connection hose to sensortap
Standard SPX hose 700mm

Connection hose to sensortap
Standard SPX hose 700mm

Built-in check valves
for hot and cold inlet

M40x1,5

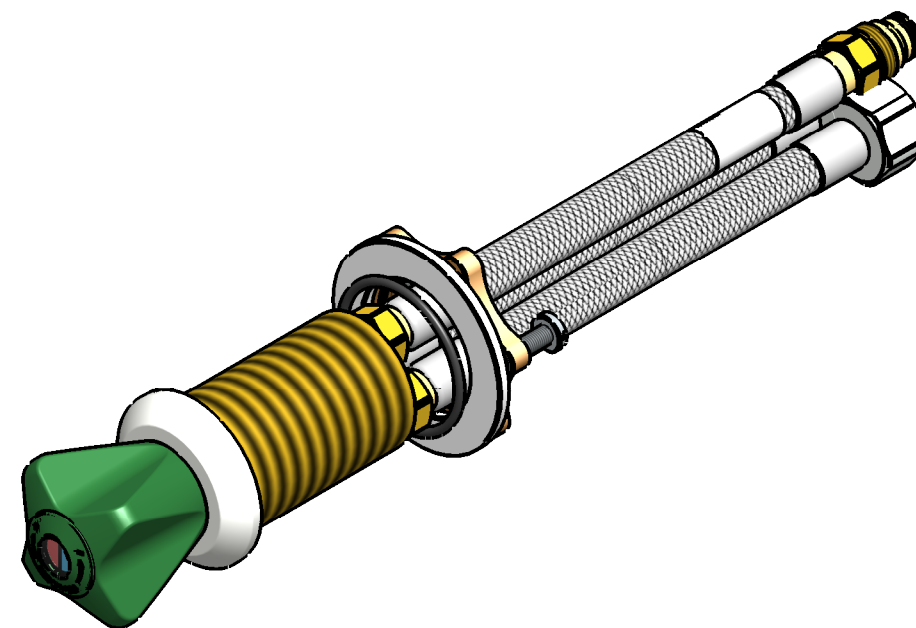

Description: 1-Hand.Mix, Table mounted, M40x1,5 nut with o-ring and washer, , ISO228/1-G1/2

							Media:	Water		
							Comments:	Temperature regulating valve		
							Drawing type:	Customer drawing	Weight:	1.255 Kg
B		04-12-19			roe		Designed by:	SJE	Released on TM No.	7176
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Drawn by:	SJE	Date:	23-08-18
BROEN-LAB							This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.			
							Format:	A3	Drawing No.:	26020021035E