

Area of Application:
Column
Water


Max. working pressure 10 bar
Min. temperature 5°C
Max. temperature 90°C

Details:
Ceramic headwork open/close 180°
3-Zone colour, acc. to EN13792:2002
Fixed
1/2" removable nozzle

Materials in media contact:
Brass, CW614N
Rubber, EPDM
Silicone based lubricant

Mounting:
1/2" nut with locking pins o-ring and washer




Inlet / outlet connection:
DN8 hose with G1/2 female inlet
DIN 12 898, form A, size 1, 1/2" hose nozzle

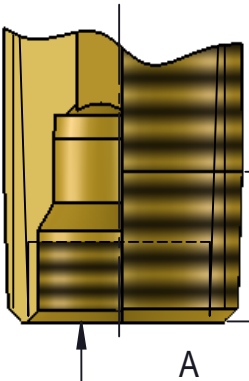

BROEN UniFlex connection

1/2" NPT ANSI B1.20.1-1983

Metal Handle

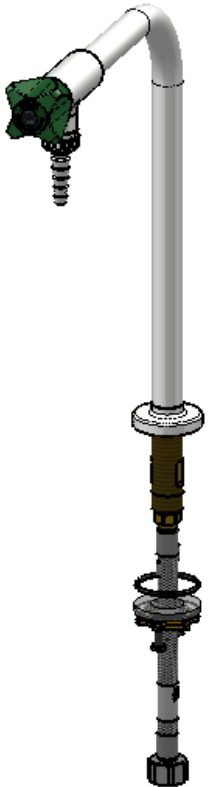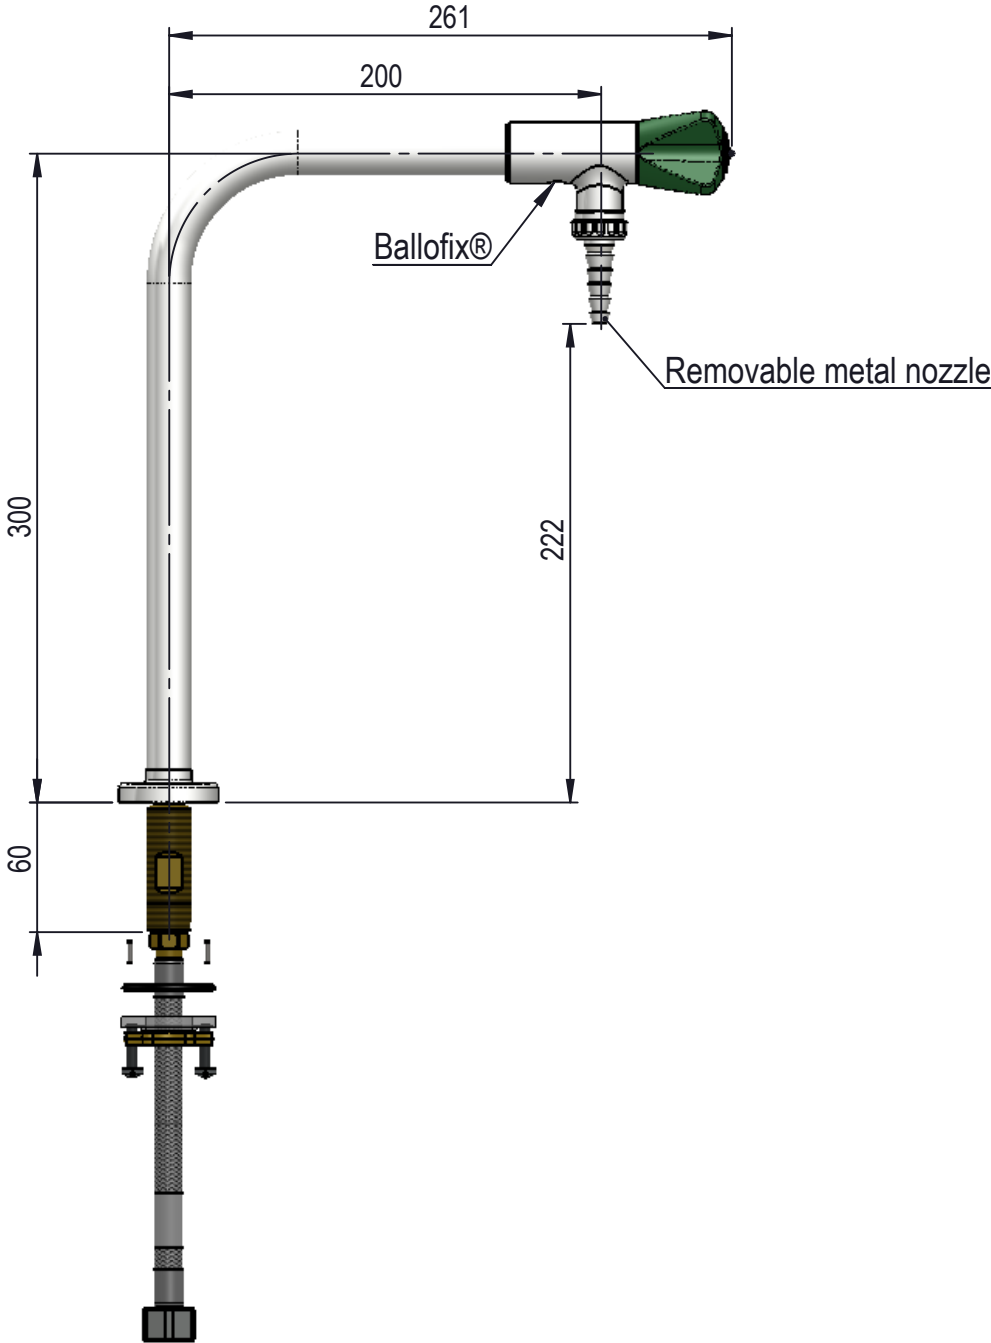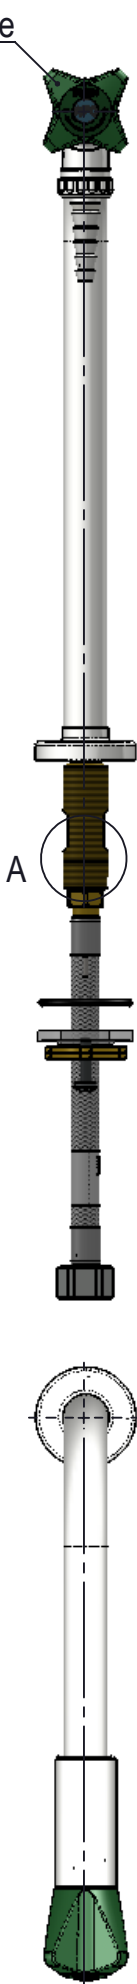

MEDIA CODE XX FOR WATER
ONE MEDIA FITTING
ACCORDING TO EN 13792

Media	Media description	Media code XX
WPC	Water potable cold	01
WPH	Water potable hot	02
WNC	Water non-potable, cold	07
WNH	Water non-potable, hot	08

Description: 1-Valve, Column, 1-Hole, Rem. Nozzle, G1/2", Hose

									Media:	Water				
									Comments:	2533master019				
									Drawing type:	Customer drawing		Weight:	1.524 Kg	
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:			Designed by:	Drawn by:	Released on TM No.		Date:	
BROEN-LAB						This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.			VJE	MWA			26-03-2015	
									Format:	Drawing No.: 253302483XX-14E				
									A3					

BROEN-LAB

This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.