

Area of Application:
Turret (180°)
Burning gases

Max. working pressure 7 bar





Details:
"Lift/turn" safety handle, open/close 90°
3-Zone colour, acc. to EN13792:2002

Fixed nozzle

Materials in media contact:
Brass
Nickel plated, Brass
Rubber, NBR
Mineral oil based lubricant

Mounting:
1/2" nut with locking pins, O-ring and washer (See 94G0232)

Inlet / outlet connection:
UniFlex
DIN 12 898 hose nozzle

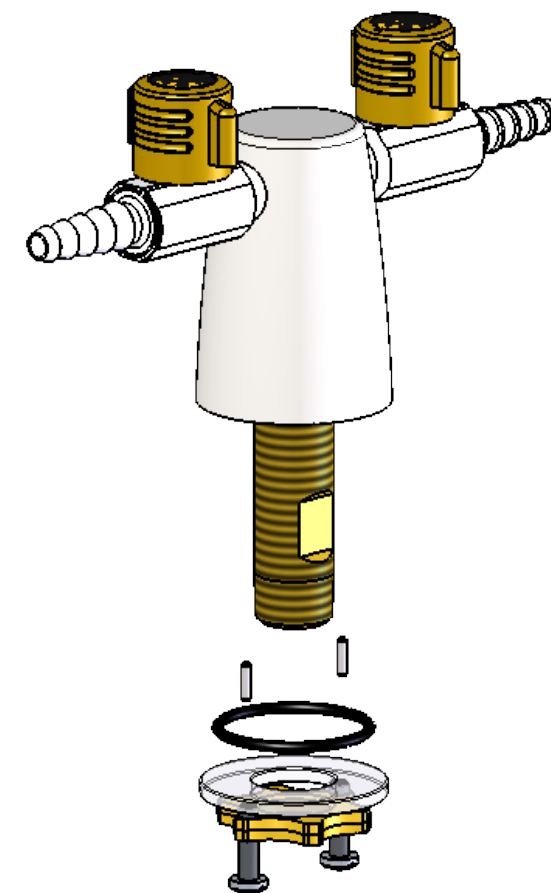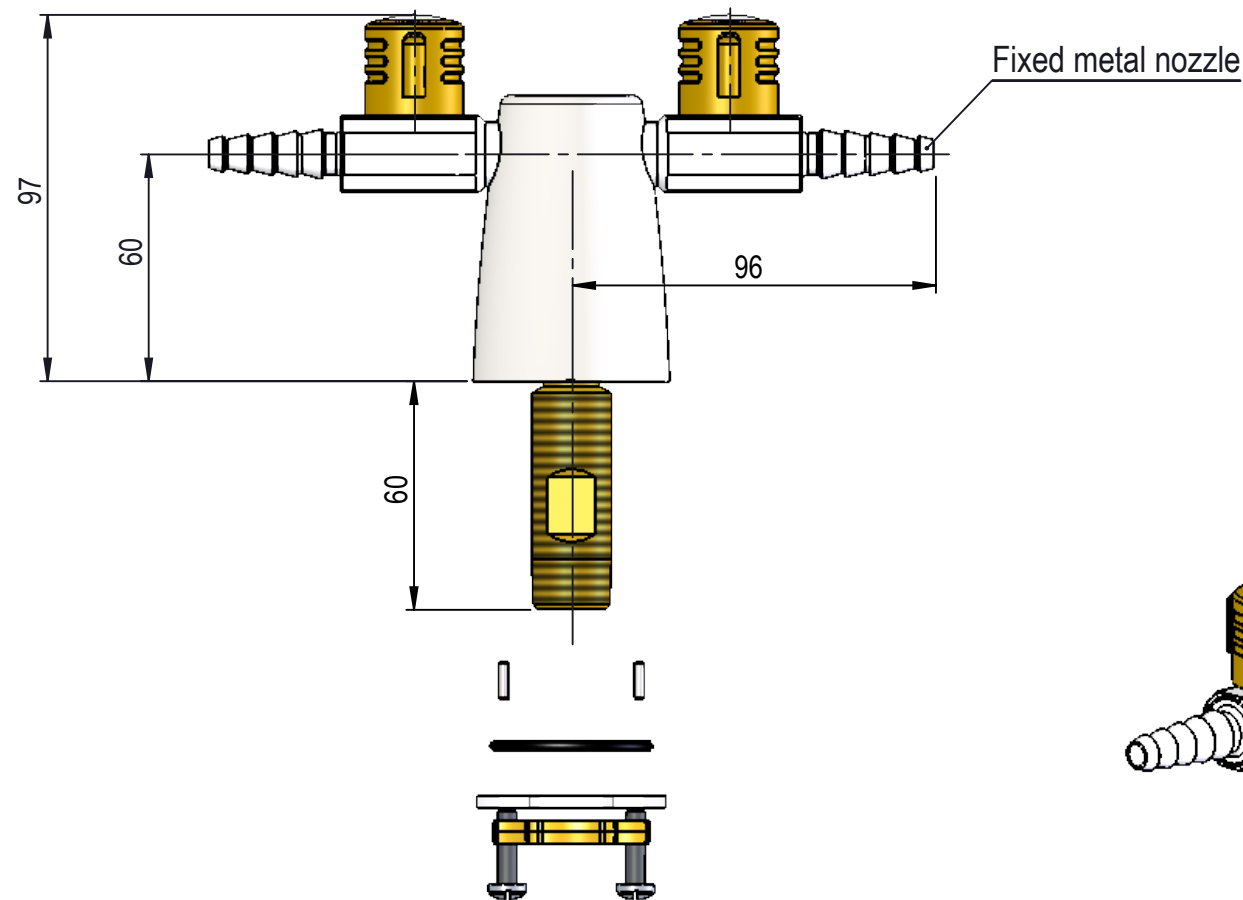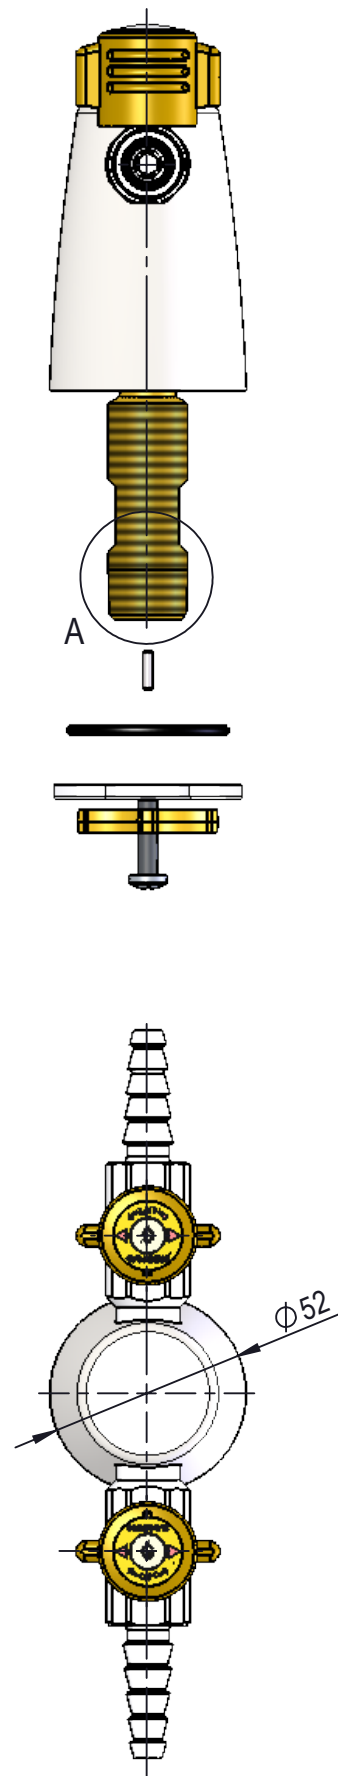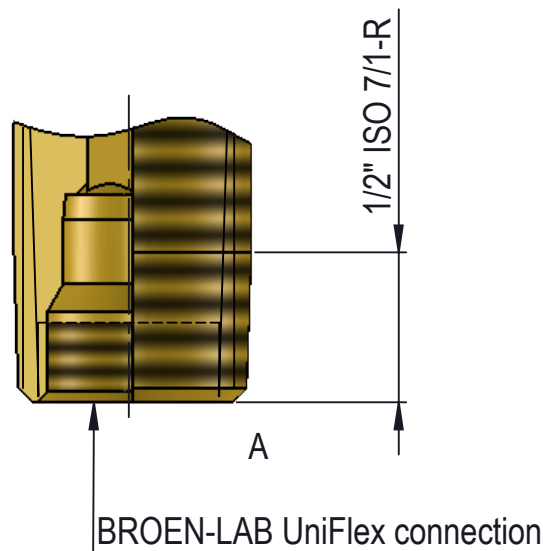

MEDIA CODE XX FOR
BURNING GAS FITTINGS FOR
LIFT / TURN HANDLE
ACCORDING TO EN 13792
*Model shown for G

Media	Media description	Media code XX
G	Natural gas	10
LPG	Propane/butane (liquefied gasses)	12

Description: 2-Valves, Turret (180°), 1-Hole, Fix. Nozzle, UniFlex

						Media: Burning gases	
						Comments:	
B	23-10-19			rek		Drawing type: Customer drawing	Weight: 0.773 Kg
C	17-12-21	8993	PEC	PEC	Drawing update		
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	
						Designed by: BJP	
						Drawn by: MWA	
						Released on TM No.	
						Date (DD-MM-YY): 22-09-14	
						Format: A3	
						Drawing No.: 252031983XX-14	

BROEN-LAB

This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.