

LED Waterproof

OPPLE

Version date 03-01-2018
www.opple.com


Item Code	CCT	kg
543022000100	4000K	2.3kg
543022000200	4000K	2.3kg

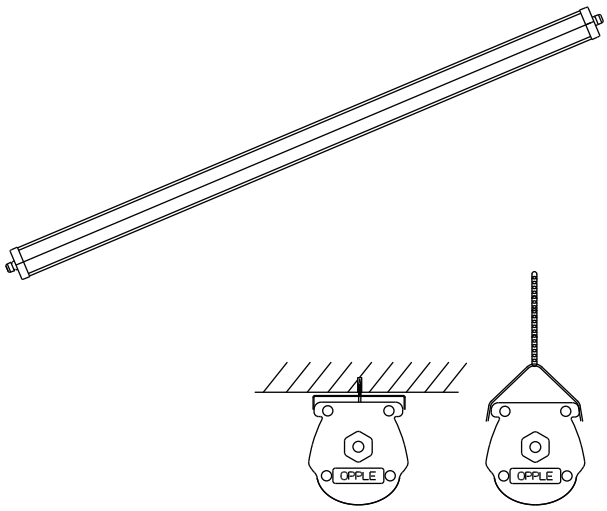

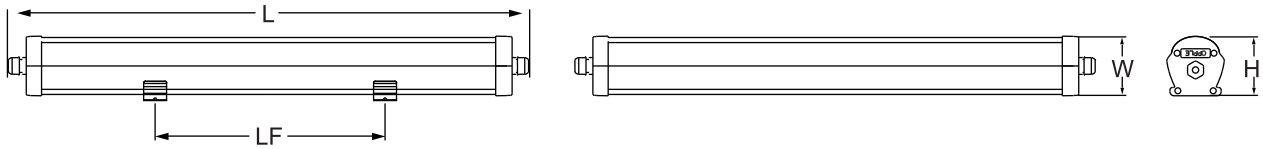


Model	L (mm)	W (mm)	H (mm)	LF (mm)	Rated Voltage	Frequency	Rated Power	External wire diameter : 1.5mm² Max. number of connected luminaires	External wire diameter : 2.5mm² Max. number of connected luminaires
LED WP-P2 L1563-90W	1590	80	82	750	220-240V	50/60Hz	90W	5	6
LED WP-P2 L1563-75W	1590	80	82	750	220-240V	50/60Hz	75W	5	6

Installation

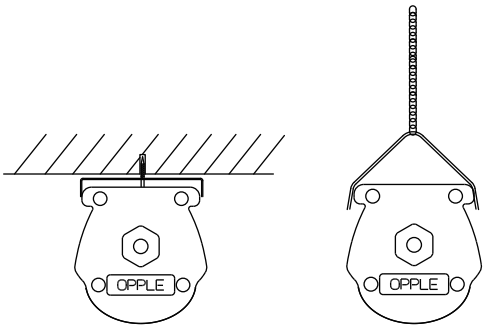

Surface Mounting Suspension Mounting

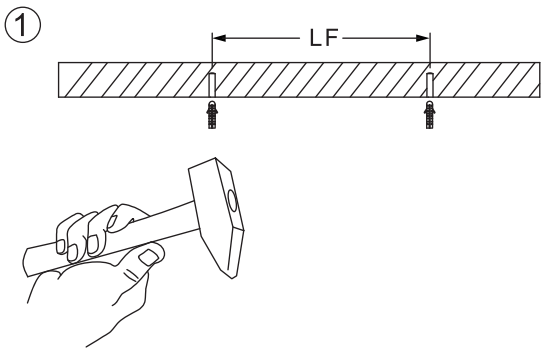


Model	LF(mm)
LED WP-P2 L1563-90W	750
LED WP-P2 L1563-75W	750

OPPLE


②

Surface Mounting

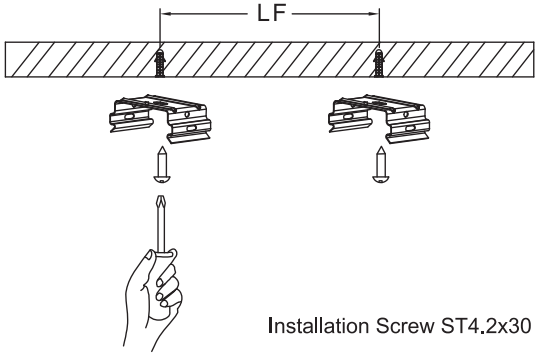


Installation Screw ST4.2x30

Suspension Mounting

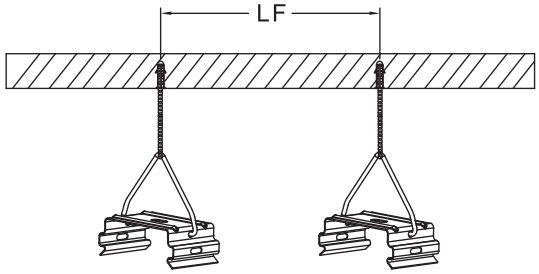


Suspension system

③

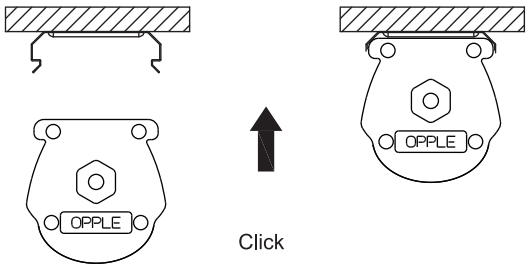

Click


④

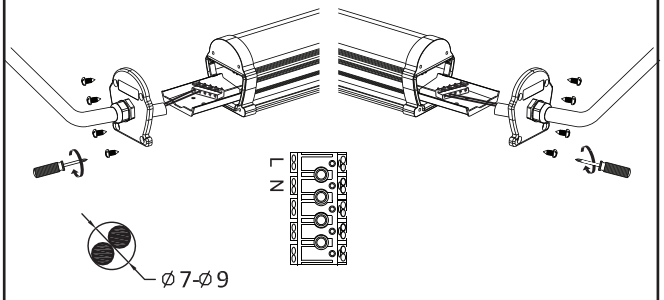

ø7-ø9

External wire diameter : 2×1.5mm²~2×2.5mm²


⑤

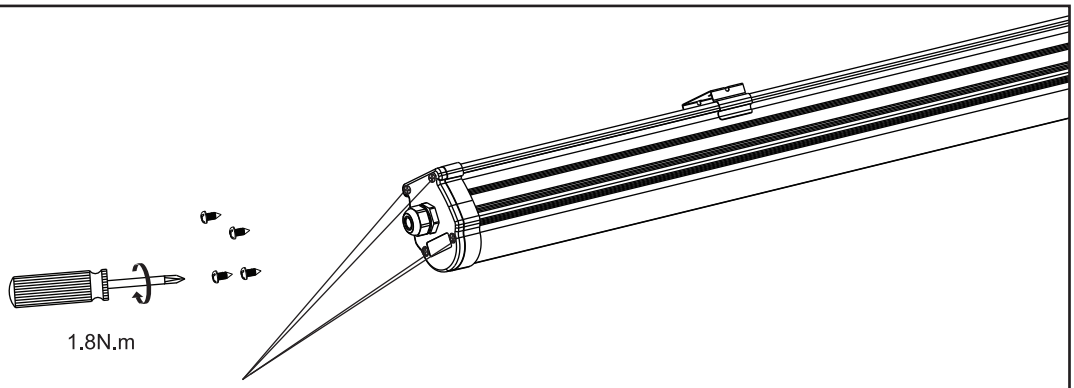

1.8N.m


IP65 protection can only be guaranteed with properly tightened screws.

Components

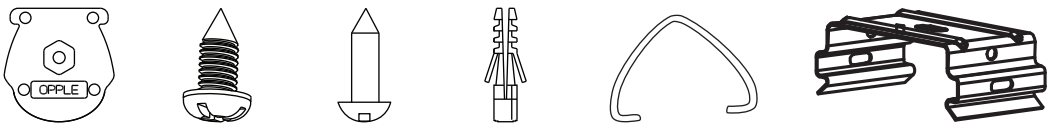

×2 ×8 ×2 ×2 ×2 ×2

Components included in the packaging inside the components box.



For non replaceable light sources
"The light source of this luminaire is not replaceable;
when the light source reaches its end of life the whole luminaire shall be replaced "



Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

Opple Lighting Electronic (Zhongshan) Co., Ltd.
528422
Building A， No.275 Dongan Bei Road,
Haizhou District, Guzhen Town,
Zhongshan City, Guangdong, China.

OPPLE Lighting B.V.
Materiaalweg 6-6A
5681 RJ Best
The Netherlands
service@opple.com
www.opple.com