

LED Waterproof

Version date 24-07-2017
www.opple.com


Item Code	CCT	kg
140057870	4000K	0.885kg
140057871	4000K	0.925kg
140057872	4000K	1.435kg
140057873	4000K	1.465kg
140057874	4000K	1.705kg
140057875	4000K	1.73kg
140058167	6500K	1.73kg

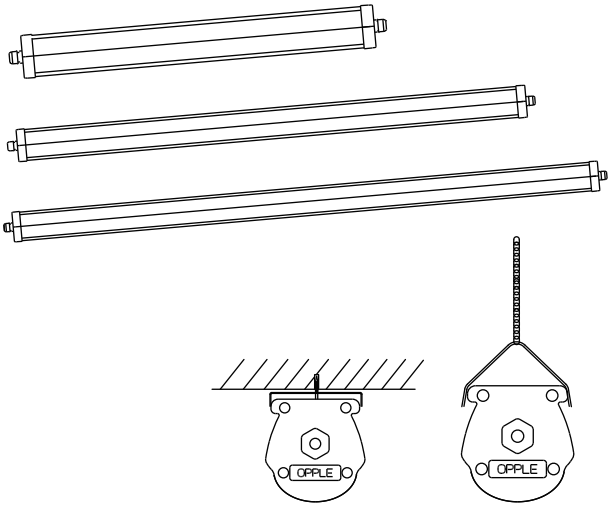

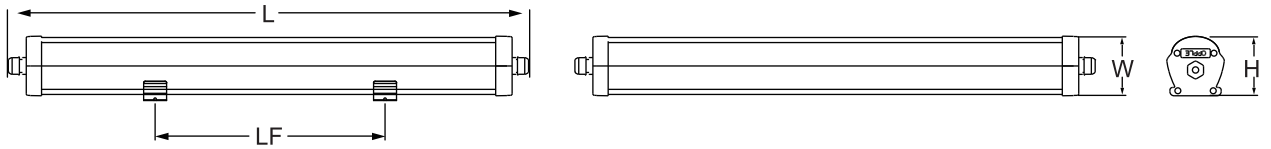


Model	L (mm)	W (mm)	H (mm)	LF (mm)	Rated Voltage	Frequency	Rated Power	External wire diameter : 1.5mm² Max. number of connected luminaires	External wire diameter : 2.5mm² Max. number of connected luminaires
LED WP-P2 L653-13W DALI	685	80	82	300	220-240V	50/60Hz	13W	20	40
LED WP-P2 L653-24W DALI	685	80	82	300	220-240V	50/60Hz	24W	15	30
LED WP-P2 L1263-24W DALI	1290	80	82	600	220-240V	50/60Hz	24W	15	30
LED WP-P2 L1263-45W DALI	1290	80	82	600	220-240V	50/60Hz	45W	10	20
LED WP-P2 L1563-28W DALI	1590	80	82	750	220-240V	50/60Hz	28W	15	30
LED WP-P2 L1563-55W DAL	1590	80	82	750	220-240V	50/60Hz	55W	10	20

Installation

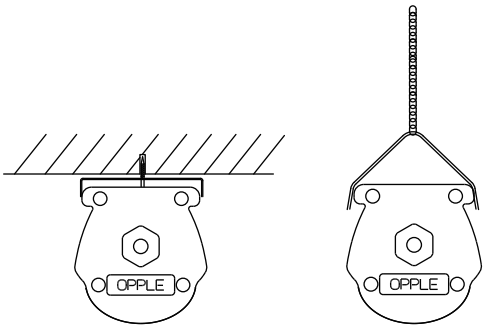

Surface Mounting Suspension Mounting

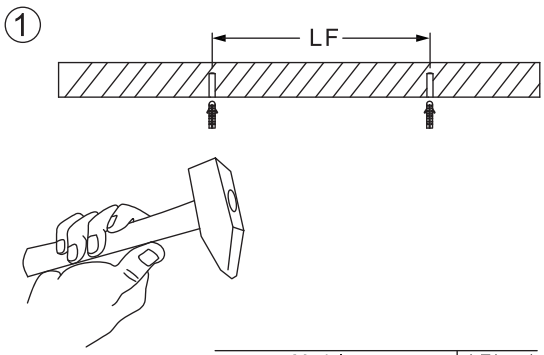


Model	LF(mm)
LED WP-P2 L653-13W DALI	300
LED WP-P2 L653-24W DALI	300
LED WP-P2 L1263-24W DALI	600
LED WP-P2 L1263-45W DALI	600
LED WP-P2 L1563-28W DALI	750
LED WP-P2 L1563-55W DALI	750

OPPLE


②

Surface Mounting

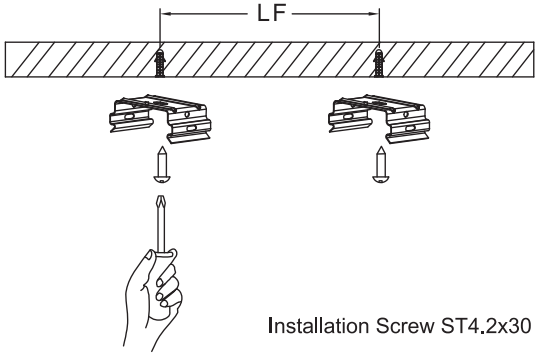


Installation Screw ST4.2x30

Suspension Mounting

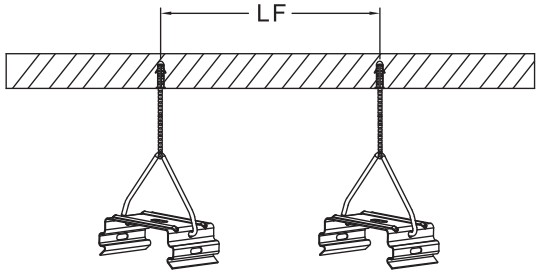


Suspension system

③

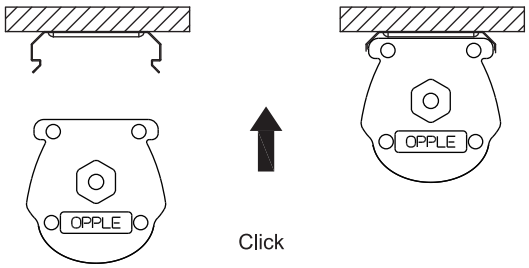

Click


④

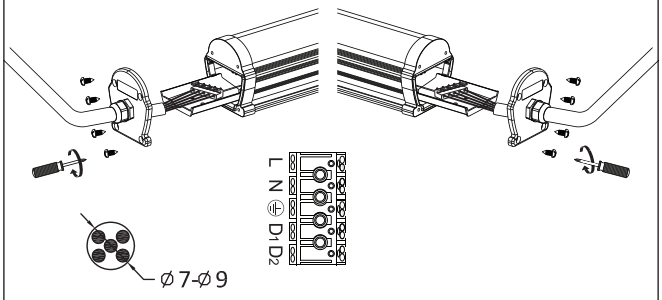

ø7-ø9

External wire diameter : 5×1.0mm²~5×2.5mm²


⑤

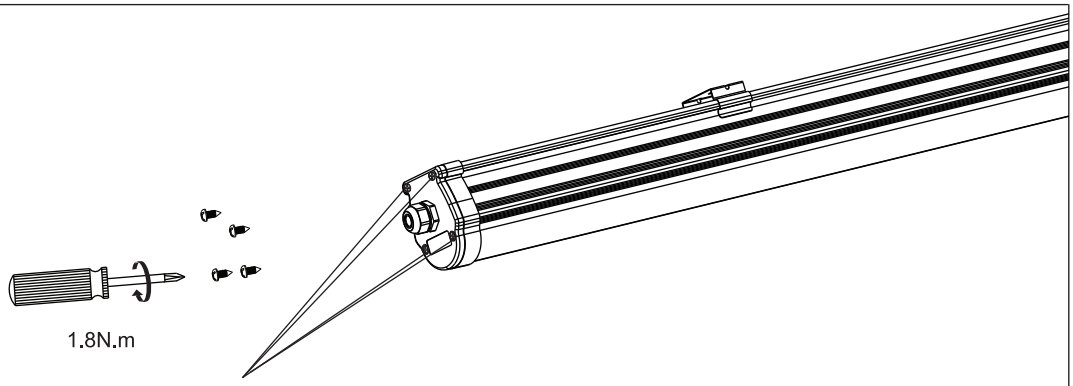

1.8N.m

IP65 protection can only be guaranteed with properly tightened screws.

Components

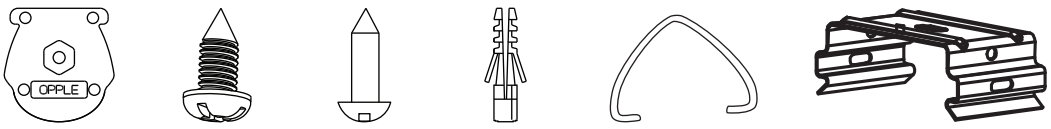

×2 ×8 ×2 ×2 ×2 ×2

Components included in the packaging inside the components box.

For non-user replaceable light sources
"The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person."

IP65 EN 60598 650° IK08 LED DALI

Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

Opple Lighting Electronic (Zhongshan) Co., Ltd.
528422
Building A, No.275 Dongan Bei Road,
Haizhou District, Guzhen Town,
Zhongshan City, Guangdong, China.

OPPLE Lighting B.V.
Materiaalweg 6-6A
5681 RJ Best
The Netherlands
service@opple.com
www.opple.com