

LED Waterproof

OPPLE

Version date 24-07-2017
www.opple.com


Item Code	CCT	kg
140057864	4000K	0.885kg
140057865	4000K	0.925kg
140057866	4000K	1.435kg
140057867	4000K	1.465kg
140057868	4000K	1.705kg
140057869	4000K	1.73kg
140058166	6500K	1.73kg

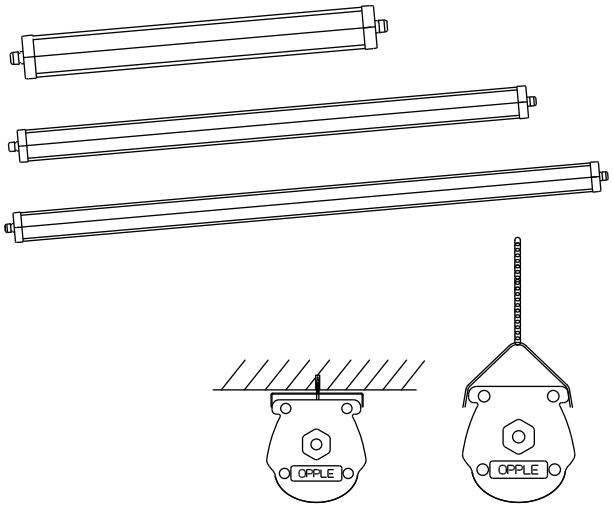

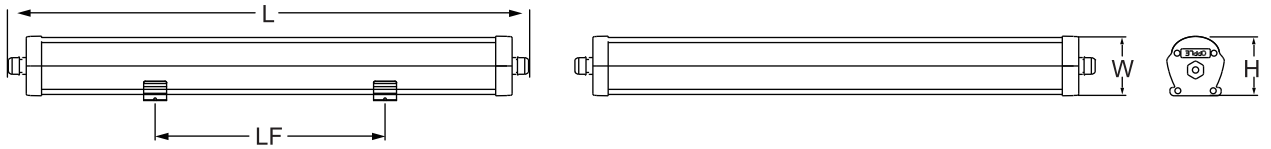


Model	L (mm)	W (mm)	H (mm)	LF (mm)	Rated Voltage	Frequency	Rated Power	External wire diameter : 1.5mm² Max. number of connected luminaires	External wire diameter : 2.5mm² Max. number of connected luminaires
LED WP-P2 L653-12.5W	685	80	82	300	220-240V	50/60Hz	12.5W	20	40
LED WP-P2 L653-23W	685	80	82	300	220-240V	50/60Hz	23W	15	30
LED WP-P2 L1263-23W	1290	80	82	600	220-240V	50/60Hz	23W	15	30
LED WP-P2 L1263-40W	1290	80	82	600	220-240V	50/60Hz	40W	10	20
LED WP-P2 L1563-27W	1590	80	82	750	220-240V	50/60Hz	27W	15	30
LED WP-P2 L1563-51W	1590	80	82	750	220-240V	50/60Hz	51W	10	20

Installation

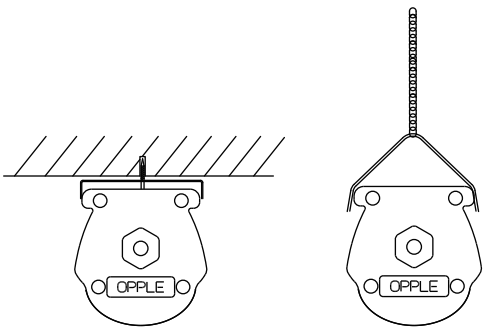


Surface Mounting Suspension Mounting

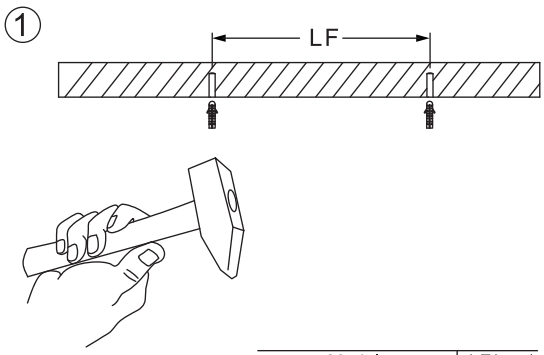

Model	LF(mm)
LED WP-P2 L653-12.5W	300
LED WP-P2 L653-23W	300
LED WP-P2 L1263-23W	600
LED WP-P2 L1263-40W	600
LED WP-P2 L1563-27W	750
LED WP-P2 L1563-51W	750


OPPLE

② Surface Mounting

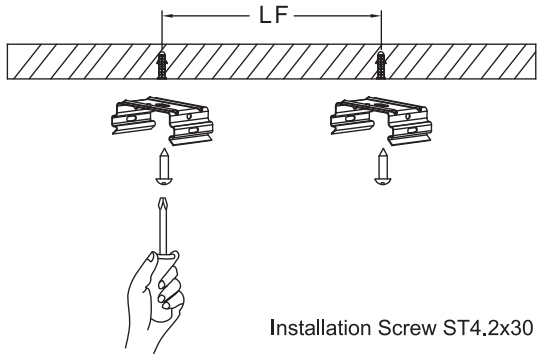


Installation Screw ST4.2x30

Suspension Mounting

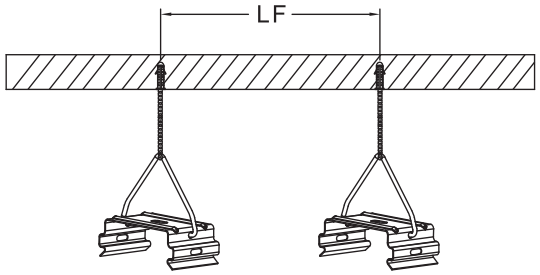


Suspension system

③

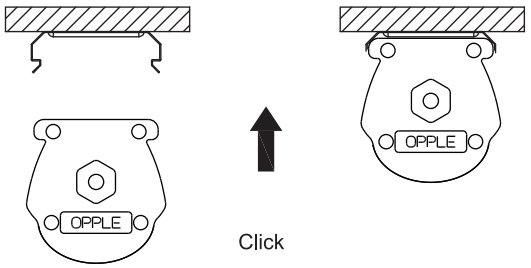


Click

④

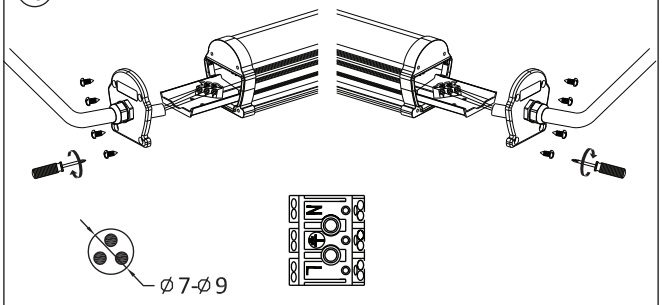


External wire diameter : 3×1.0mm²~3×2.5mm²

⑤

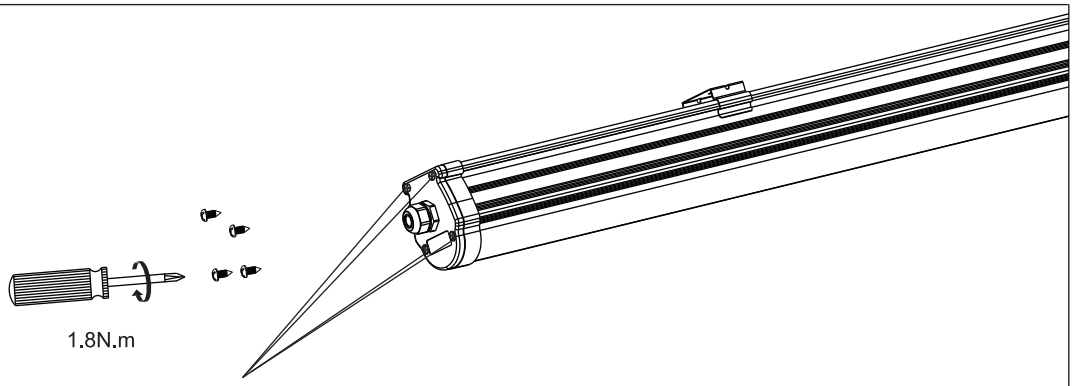

IP65 protection can only be guaranteed with properly tightened screws.

Components

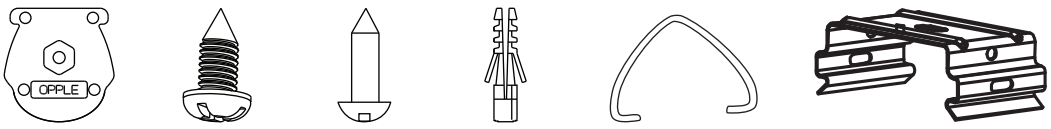

×2 ×8 ×2 ×2 ×2 ×2

Components included in the packaging inside the components box.

For non-user replaceable light sources
"The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person."

IP65 EN 60598 650° IK08 LED

Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

Opple Lighting Electronic (Zhongshan) Co., Ltd.
528422
Building A, No.275 Dongan Bei Road,
Haizhou District, Guzhen Town,
Zhongshan City, Guangdong, China.

OPPLE Lighting B.V.
Materiaalweg 6-6A
5681 RJ Best
The Netherlands
service@opple.com
www.opple.com