



Downlight Basic

- Suitable for recessed applications
- Energy saving up to 60%
- Flicker-free light with perfect uniformity
- Easy to install due to integrated LED driver



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
540001023700	LEDDownlightRc-B Rd200-22W-3000-WH	CFL 2x26W	22	1800	82	3000	0.25

Accessories



140060652
LEDDownlightRc-HZdim-Adapter-200-225



542098030700
Junction-Box-WH

140060649
LEDDownlightRc-HZdim-Adapter-200-250

Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140060649	LEDDownlightRc-HZdim-Adapter-200-250	275x275x0.8	0.18	6956321894153	1
140060652	LEDDownlightRc-HZdim-Adapter-200-225	250x250x0.8	0.11	6956321894184	1
540001023700	LEDDownlightRc-B Rd200-22W-3000-WH	224x66x224	0.33	6956321803452	1
542098030700	Junction-Box-WH	43x103.4x26	0.07	6941408868684	1

Technical Specifications

Lifetime (L70)	30,000 h
Lifetime (L80)	20,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	110°
Finishing	White RAL9003
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Driver failure rate (at 5,000 hrs)	1 %
Power factor	0.5

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	See catalogue Technical Data section
230V Cable length	0.3 m

Mechanical Properties

Material housing	Polycarbonate (PC)
Optical material	Polypropylene (PP)

Ambient Conditions


Operating temperature	-10-+45°C
Application temperature	+25°C
Storage environment	-25-+50°C

3 YEARS WARRANTY




Dimensional Drawing (mm)

LEDDownlightRc-B Rd200-22W

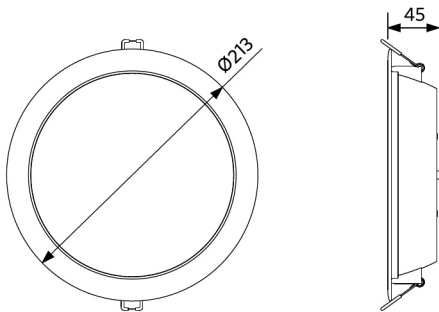

Photometric Data

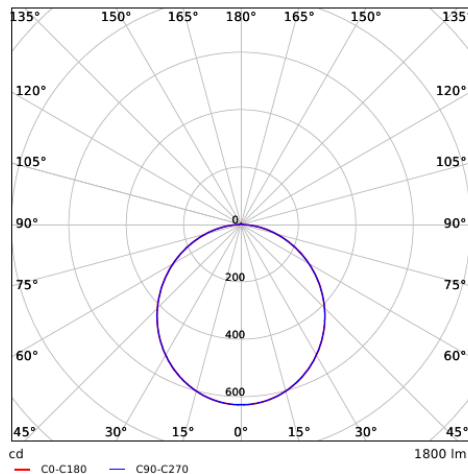

Installation Opening Drawing (mm)

LEDDownlightRc-B Rd200
Ø200

