

LED Roadlight

OPPLE



Version date 01-08-2018
www.opple.com

Item
Code

CCT




LED RL-90W DALI	4000K	9.0kg
LED RL-120W DALI	4000K	9.2kg
LED RL-150W DALI	4000K	9.2kg
LED RL-200W DALI	4000K	9.4kg

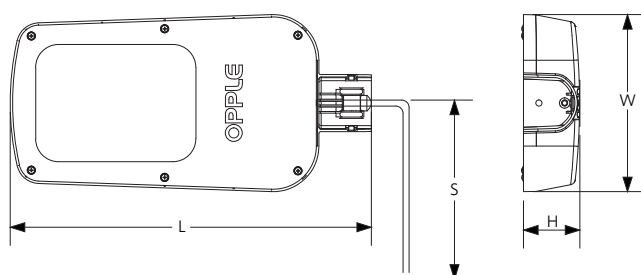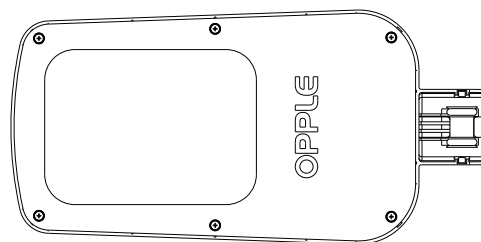

Model	L (mm)	W (mm)	H (mm)	S (mm)
LED RL-90W DALI	631	310	98	10000
LED RL-120W DALI	631	310	98	10000
LED RL-150W DALI	631	310	98	10000
LED RL-200W DALI	631	310	98	10000


Effective Wind Area: 16000 mm²

1A Pole Φ48mm-60mm

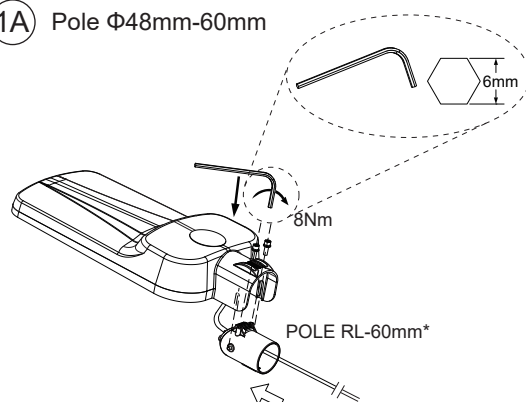


*ADAPTER NOT INCLUDED IN THE PACKAGING

1B Pole Φ76mm

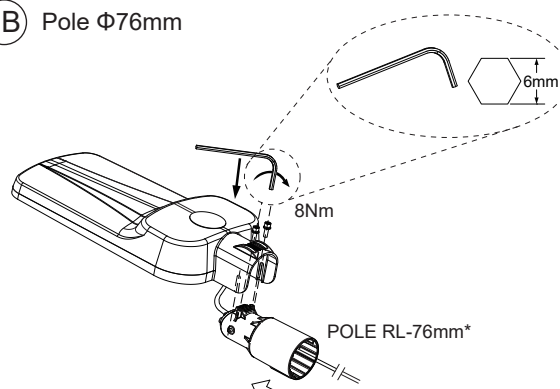


*ADAPTER NOT INCLUDED IN THE PACKAGING

2

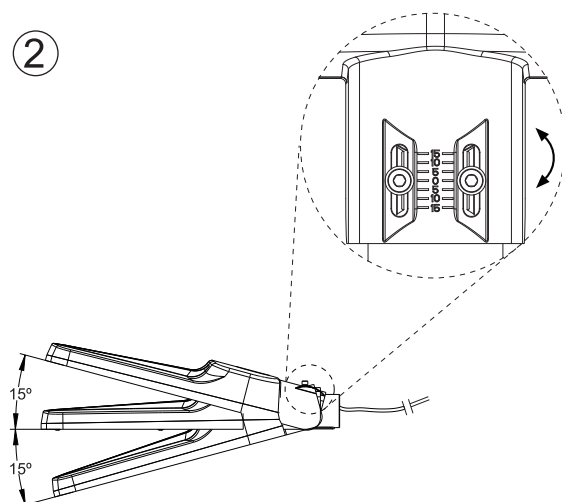


3

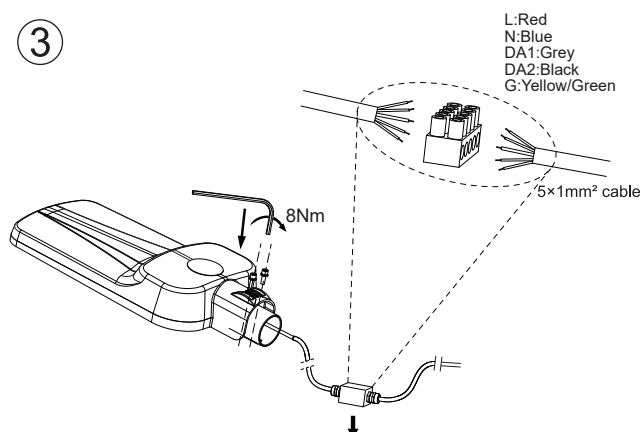

Additional IP66 waterproof connection box (Not included in packaging) is necessary for power connection. The connection box and terminal block should conform to EN 60998-2-1 or EN60998-2-2.


250052412000

4A Horizontal Pole $\Phi 48\text{mm}-60\text{mm}$

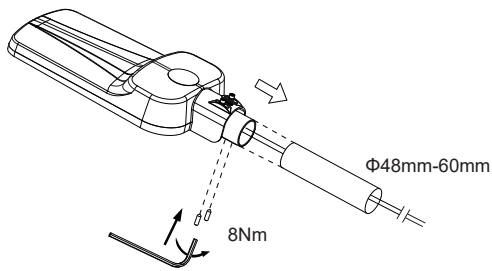


POLE RL-60mm ADAPTER NOT INCLUDED IN THE PACKAGING

4B Horizontal Pole $\Phi 76\text{mm}$

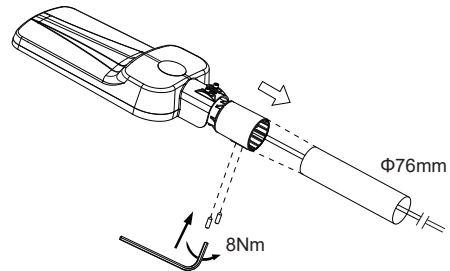


POLE RL-76mm ADAPTER NOT INCLUDED IN THE PACKAGING

4C Vertical Pole $\Phi 48\text{mm}-60\text{mm}$

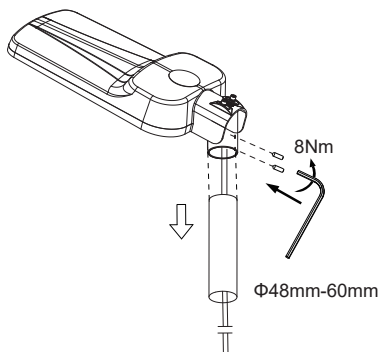

POLE RL-60mm ADAPTER NOT INCLUDED IN THE PACKAGING

4D Vertical Pole $\Phi 76\text{mm}$

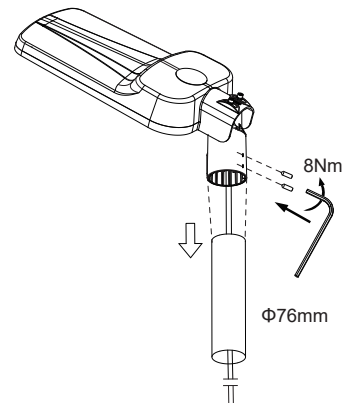

POLE RL-76mm ADAPTER NOT INCLUDED IN THE PACKAGING




In case of damage to the wire, it has to be replaced only by the manufacturer, distributor or by an expert, to avoid risks.

Caution: Any operation on LED module is forbidden while power-on.

Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.

Achtung: In Betrieb ist keine Arbeit am LED-Modul erlaubt.



For non-user replaceable light sources.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

