OPPLE LIGHTING.





Slim Panel Performer UGR19 G6

- High quality LED Slim Panel, suitable for offices (UGR19)
- Standard IP54 (front side)
- Recessed, suspended and surface mounting possible

Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Colour rendering index (CRI)	Weight (kg/pc)
Wieland2, On-Off								
542003114800	LEDPanelS-P6 Re295-30W-840-U19-WL	TL 2x36W	30	4200	140	4000	> 80	1.91

Accessories

Surface Mounting Frame



140055486
LEDPanelRc-Sl Re300-Surface-Module-WH-CT



542098017700
LEDPanelRc2 Re300-Surface-Kit-WH

Recessed Mounting Frame



542098009800
LEDPanelRc Re300-Frame-WH



542098045500
LEDPanelS-P Suspension-Kit-G6



542098000800
LEDPanelRC-Sl U19 EM-kit 1h

542098000900
LEDPanelRC-Sl U19 EM-kit 3h



140060852
LEDFixture-Ceiling-Cable-Kit-0.5m



542098030700
Junction-Box-WH

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542003114800	LEDPanelS-P6 Re295-30W-840-U19-WL	94051190	1306x41x333	2.60	6931783000274	1
140055486	LEDPanelRc-SI Re300-Surface-Module-WH-CT	94059900	1290x390x118	4.60	6956321879822	1
140060852	LEDFixture-Ceiling-Cable-Kit-0.5m	73121020	100x100x5	0.40	6956321895266	1
542003021800	LEDPanelRc-S-B2 Mounting-Springs	73209090	280x200x170	0.10	6941408821672	1
542098000800	LEDPanelRC-SI U19 EM-kit 1h	85044083	490x390x150	0.98	6941497702340	1
542098000900	LEDPanelRC-SI U19 EM-kit 3h	85044083	490x390x150	1.08	6941497702333	1
542098009800	LEDPanelRc Re300-Frame-WH	94059900	388x90x1290	1.93	6941497704047	1
542098017700	LEDPanelRc2 Re300-Surface-Kit-WH	94059900	1394x77x68	1.95	6941497720672	1
542098030700	Junction-Box-WH	85369010	43x103.4x26	0.06	6941408868684	1
542098045500	LEDPanelS-P Suspension-Kit-G6	73121020	130x130x30	0.22	6941497784773	1

Technical Specifications	
Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
Lifetime (L90)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmability	On-Off
Beam angle	90°
Finishing	White RAL9003
UGR	≤ 19
IP front side	IP54
IP recessed part	IP20
Impact strength	IK03
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications
230V Cable length	0.3 m


Mechanical Properties	
Housing material	Aluminum
Optical material	PMMA
Cover material	Polystyrene (PS)

Ambient Conditions	
Operating temperature	-10~+45°C
Application temperature	+25°C
Storage environment	-20~+50°C


5 YEARS WARRANTY

Dimensional Drawing (mm)


LEDPanelS-P6 Re295

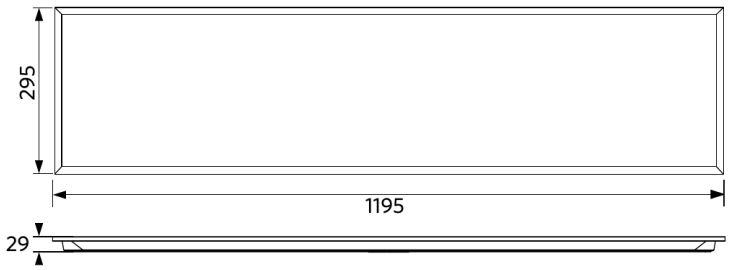


LEDPanelS-P6
Driver On/Off

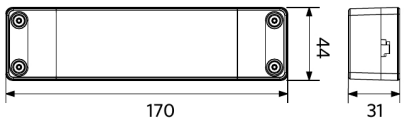

LEDPanelS-P6
Driver Dim

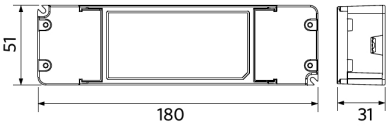

LEDPanelS-P6
Driver Tunable White

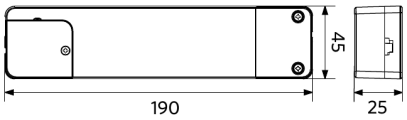

Photometric Data

