NVENT CADDY SPEED LINK SLK MET VOORGEMONTEERDE SCHIETNAGEL, 1,5 MM KABEL, 1 M LENGTE

CATALOG NUMBER

SLK15L1SF



CERTIFICATIONS

FEATURES

- Een compleet systeem, inclusief kabel, kabelklem en montagebeugel met voorgemonteerde nagel van Powers Fasteners, Inc.
- Snelle en gemakkelijke bevestiging aan betonnen welfsels of warmdakplaten
- Geïntegreerde pen kan eenvoudig worden geïnstalleerd met poedergeactiveerde of enkelschots gasgeactiveerde gereedschappen
- ICC-ES ESR-2024 beoordelingsrapport beschikbaar voor aandrijfpin van DEWALT®

PRODUCTKENMERKEN

- Article Number: 196517
- Material: Steel; Zinc Alloy; Polypropylene
- Finish: Elektrolytisch gegalvaniseerd
- Static Load Safety Factor: 5:1
- Complies With: SMACNA HVAC-DCS
- Wire Rope Diameter: 1,5 mm

Wire Rope Length: 1 m

A: 37,5 mm

B: 7,6 mm

C: 31,8 mm

Static Load: 195 N

Height: 55 mm

Width: 19 mm

Thickness: 12,5 mm

Angle: 90 ° max

ADDITIONAL PRODUCT DETAILS


Uses Powers Fasteners, Inc. part number 50032.

Static load was established based on a 1” (25.4 mm) embedment depth and 3,000 psi (20.68 MPa) lightweight concrete. Raadpleeg voor variaties in verankeringen en materiaal www.powers.com.

Pre-assembled drive pin from Powers Fasteners, Inc. works with Powers® C4CZ, Simpson® GCN-MEPKT, SPIT® P1000, P200, P2201, P3500 / PA3500, P35s, P45, P60, P7201, Sniper; Ramset® 721, Cobra, D45 / D60 / D60L, M70, SA270, T3SS, TS750P, TS60P, Viper; Hilti® DX35, DX350 / DX351 / DX36M, DX100 / DX200, DX460, DXA40, DXA41,-DXE72 / DX400; Würth® Diva-1, BST-1, BST-2 or equivalent nailers.

For shot-fired supports in seismic design category D, E, or F, maximum load is the lesser of 90 lb (400 N) or the published load.

DIAGRAMS

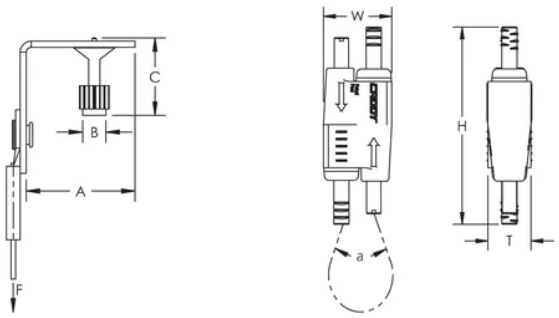

WAARSCHUWING

Producten van nVent moeten worden geïnstalleerd en gebruikt op de manier zoals is aangegeven in de nVent productinformatiebladen en trainingsmaterialen. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Door onjuist installeren, verkeerd gebruik, verkeerde toepassing of enige andere handeling in strijd met de instructies en waarschuwingen van nVent kan het product mogelijk niet correct werken, ernstig of fataal letsel en materiële schade veroorzaken en/of uw garantie ongeldig maken.

Noord-Amerika
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europa
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europa
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500

Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.