LAAGSPANNINGSISOLATOREN, METR. SCHROEFDRAAD, 45 MM, ZESKANT 50 MM BREED, M8

CATALOG NUMBER

ISOTP45M8L



CERTIFICATIONS

FEATURES

- Halogeenvrij
- High resistance to leakage current
- Great stability of electrical and mechanical parameters
- Fiberglass reinforced
- UL® Recognized in E125470 and evaluated for dielectric withstand rating of 1,500 VAC/DC
- RoHS compliant

PRODUCTKENMERKEN


- Article Number: 548550
- Material: Steel;Glass Fibre Reinforced Polyamide
- Finish: Elektrolytisch gegalvaniseerd
- Working Temperature: -40 tot 130 °C
- Flammability Rating: UL® 94V-0
- Complies With: IEC® 60695-2-11 (gloeidraadtest 960 °C)
- Dielectric Strength, IEC 61439,1: 3500 VAC @ 1 min
- Dielectric Strength, UL: 1500
- Insulation Voltage: 1000;1500

Height: 45 mm
Hex Width: 50 mm
Depth: 57 mm
Thread Size: M8
Thread Depth: 15 mm
Diameter: 41 mm
Static Load 1: 18000 N
Static Load 2: 10000 N
Unit Weight: 0,13 kg

ADDITIONAL PRODUCT DETAILS

Creepage and clearance distances need to be in accordance with the relevant application standard.

DIAGRAMS

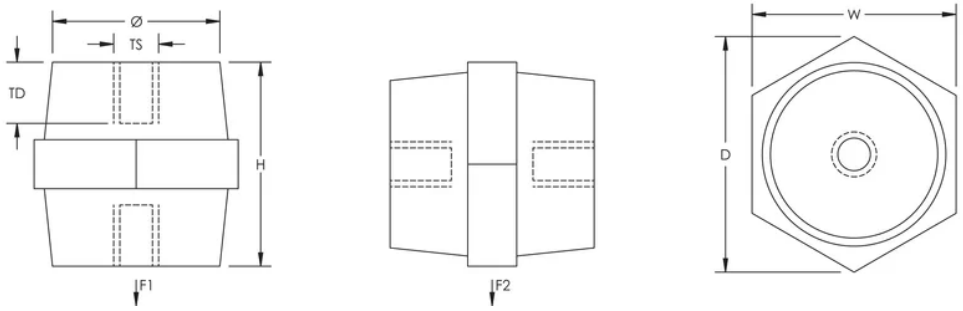

WAARSCHUWING

Producten van nVent moeten worden geïnstalleerd en gebruikt op de manier zoals is aangegeven in de nVent productinformatiebladen en trainingsmaterialen. U kunt de poductinformatiebladen downloaden van www.nvent.com of opvragen bij uw nVent-klantenservice. Door onjuist installeren, verkeerd gebruik, verkeerde toepassing of enige andere handeling in strijd met de instructies en waarschuwingen van nVent kan het product mogelijk niet correct werken, ernstig of fataal letsel en materiële schade veroorzaken en/of uw garantie ongeldig maken.

Noord-Amerika
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europa
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europa
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500

Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© 2024 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.
nVent reserves the right to change specifications without notice.